

# Miniature inductive proximity sensors series - M8 size DC 3 wire



## ■ Highlights

**Inductive sensor**  
When the metal conductive objects close to the magnetic field and reach the induction area, high-frequency alternating magnetic field generated by a LC oscillation circuit, which is composed of a coil wound on a ferrite, through the eddy current effect generated by internal of metal objects to achieve non-contact detection.

**Special miniature sensors**  
Many engineers are often faced with a particular requirements to fit inductive sensors into tight spaces. The inductive sensors of the Miniature Series are fully integrated without external amplifier and our models were equipped with reverse polarity protection and short-circuit protected switching outputs. Also an optical switching indicator is always built-in.

- Ø3 mm, Sn up to 1 mm
- M4 x 0.5, Sn up to 1 mm
- Ø4 mm, Sn up to 1.5 mm
- M5 x 0.5, Sn up to 1.5 mm
- Q5 x 5 mm, Sn up to 1.5 mm
- M8 x 1, 18 mm short, Sn up to 4 mm
- M12 x 1, 22 mm short, Sn up to 8 mm

## ■ Application

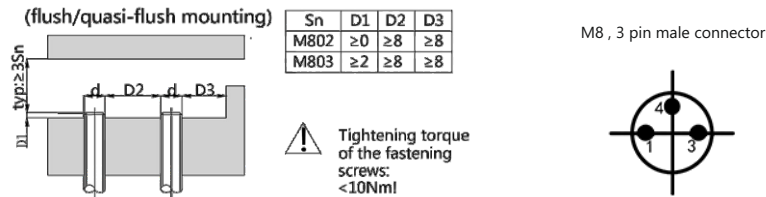
Inductive proximity switch is a low cost method for non-contact detection of metal objects, which is widely used in the following sectors, such as:

- Automotive Industry
- Metallurgical sector
- Machine tool sector
- Robot industry
- Conveyor system
- Paper and printing industry
- Mechanical Engineering

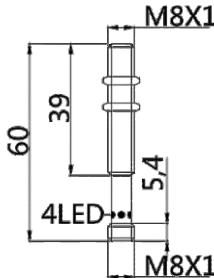

## ■ P/N table

Sensing distance	Sn: 2mm	Sn: 3mm
NPN , NO	VL1C-F08N-02NO-LM8	VL1C-F08N-03NO-LM8
NPN , NC	VL1C-F08N-02NC-LM8	VL1C-F08N-03NC-LM8
PNP , NO	VL1C-F08P-02NO-LM8	VL1C-F08P-03NO-LM8
PNP , NC	VL1C-F08P-02NC-LM8	VL1C-F08P-03NC-LM8

## ■ Installation



## ■ Product parameters

<b>Features:</b> <ul style="list-style-type: none"><li>• Diameter M8</li><li>• Sensing distance: P/N table</li><li>• Body material: Stainless steel</li><li>• Built-in electric protection</li><li>• Output: See P/N table</li><li>• Connection: 3 wires open cable</li><li>• Power supply: 24V DC, 3 wires</li></ul>	 <div>CE</div>	 <div>CE</div>																
	<b>TECHNICAL INFORMATION</b>																	
<b>INDUCTIVE SPECIFICATION</b>																		
	Sensing Distance	See P/N table																
	Correction Factor	<table><tr><th>Nav-ferrous metal</th><th>Factor</th></tr><tr><td>Fe360</td><td>1</td></tr><tr><td>Aluminum</td><td>0.35 ~ 0.45</td></tr><tr><td>Brass</td><td>0.35 ~ 0.5</td></tr><tr><td>Copper</td><td>0.35 ~ 0.45</td></tr><tr><td>Stainless Steel</td><td>0.35 ~ 0.45</td></tr><tr><td>Cast Iron</td><td>0.93 ~ 1.05</td></tr><tr><td>Nickel</td><td>0.65 ~ 0.75</td></tr></table>	Nav-ferrous metal	Factor	Fe360	1	Aluminum	0.35 ~ 0.45	Brass	0.35 ~ 0.5	Copper	0.35 ~ 0.45	Stainless Steel	0.35 ~ 0.45	Cast Iron	0.93 ~ 1.05	Nickel	0.65 ~ 0.75
	Nav-ferrous metal	Factor																
	Fe360	1																
Aluminum	0.35 ~ 0.45																	
Brass	0.35 ~ 0.5																	
Copper	0.35 ~ 0.45																	
Stainless Steel	0.35 ~ 0.45																	
Cast Iron	0.93 ~ 1.05																	
Nickel	0.65 ~ 0.75																	
Mounting	Flush type installation																	
Switching Histeresis	< 10%																	
<b>ELECTRICAL DATA</b>																		
	Operating Voltage	10~30V DC																
	Switching Frequency	3000Hz / 1000Hz																
	Voltage Drop	≤ 2.0 V																
	Leakage Current	< 0.01mA																
	Load Current	100 mA																
	No Load Current	≤ 10 mA (24V DC)																
	Hysteresis	< 15% (Sr)																
	Repeatability	< 1.0% (Sr)																
	Temperature Drift	< 1.0% (Sr)																
	Short Circuit Protection	Yes																
	Overload Protection	Yes																
	Polarity Reversal Protection	Yes																
<b>ENVIRONMENT DATA</b>																		
	Ambient Temperature	-25.....70 °C																
	Ingress Protection	IP67																
<b>MECHANICAL DATA</b>																		
	Housing Material	Stainless steel body																
	Face Material	POM																
<b>ELECTRICAL CONNECTION DATA</b>																		
	Connection	M8 Connector , 3 pins , Male type																
<b>ACCESORIES</b>																		
	Cable	Two meter angled cable (P/N: V5PN-AM8302OF) (available)																
	Cable	Ten meter angled cable (P/N: V5PN-AM8310OF) (available)																
	Connector	M8, 3 PIN, Male type, IP67, Straight, Wires with screw connection (P/N: EAM8MC3001A) (available)																

## ■ Input/Output circuit

