


■ Diffuse fiber type with stainless steel hood

VFN-D056




| Model | VFN-D056 |
|------------------------|--------------|
| Sensing | 45/150/240mm |
| Min. bending radius | R10 |
| Temperature resistance | -40 to +70°C |

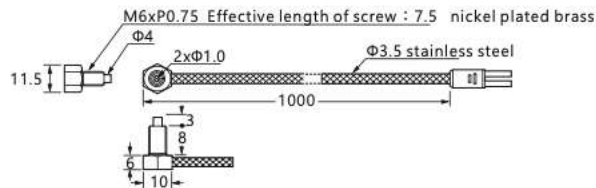

VFN-D057



| Model | VFN-D057 |
|------------------------|--------------|
| Sensing | 70/150/230mm |
| Min. bending radius | R10 |
| Temperature resistance | -40 to +70°C |

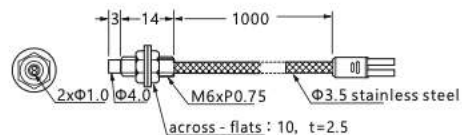


Material: nickel plated brass

VFN-D058




| Model | VFN-D058 |
|------------------------|--------------|
| Sensing | 16/55/90mm |
| Min. bending radius | R10 |
| Temperature resistance | -40 to +70°C |

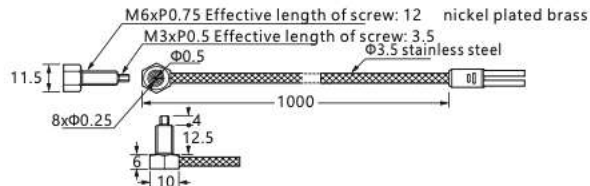

VFN-D059



| Model | VFN-D059 |
|------------------------|--------------|
| Sensing | 25/65/120mm |
| Min. bending radius | R10 |
| Temperature resistance | -40 to +70°C |

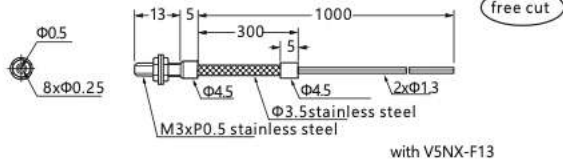

VFN-D062



| Model | VFN-D062 |
|------------------------|--------------|
| Sensing | 20/35/120mm |
| Min. bending radius | R10 |
| Temperature resistance | -40 to +70°C |

