



# ■ M4 Diffuse fiber type




Model	VFN-D096
Sensing	25/35/45mm
Min. bending radius	R25
Temperature resistance	-40 to +70°C

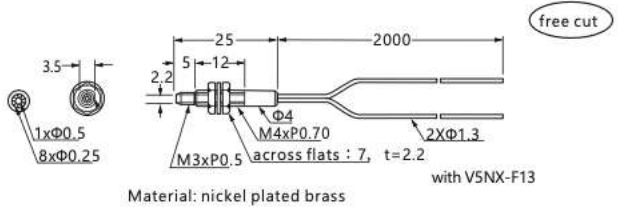


Model	VFN-D099(R)
Sensing	35/110/200mm
Min. bending radius	R2(R1)
Temperature resistance	-40 to +70°C

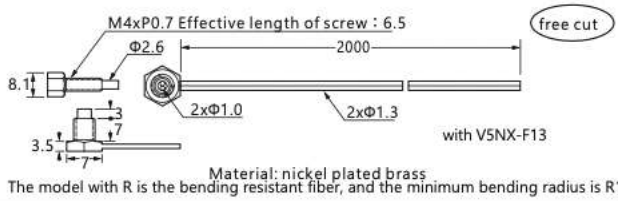

Model	VFN-D183
Sensing	30/60/150mm
Min. bending radius	R15
Temperature resistance	-40 to +70°C

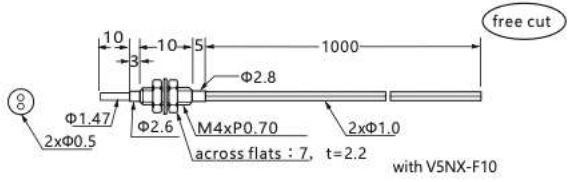


Model	VFN-D184
Sensing	30/60/150mm
Min. bending radius	R15
Temperature resistance	-40 to +70°C

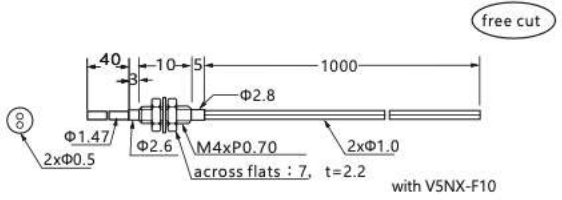



VFN-D185

Model	VFN-D185
Sensing	30/60/150mm
Min. bending radius	R15
Temperature resistance	-40 to +70°C

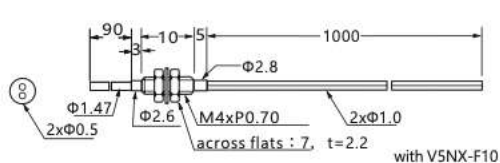


free cut



VFN-D186

Model	VFN-D186
Sensing	30/60/150mm
Min. bending radius	R15
Temperature resistance	-40 to +70°C

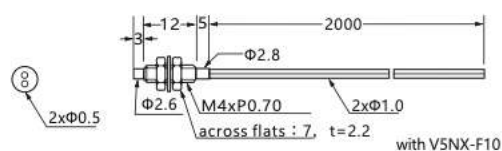


free cut



VFN-D193

Model	VFN-D193
Sensing	60/150/300mm
Min. bending radius	R25
Temperature resistance	-40 to +70°C

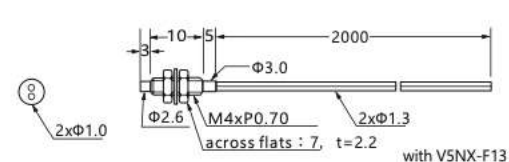


free cut



VFN-D195

Model	VFN-D195
Sensing	30/60/150mm
Min. bending radius	R15
Temperature resistance	-40 to +70°C

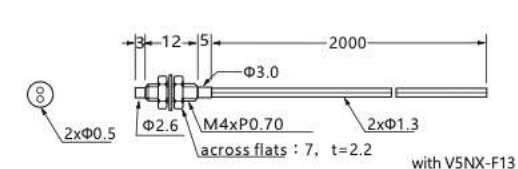


free cut



VFN-D197

Model	VFN-D197
Sensing	10/20/20mm
Min. bending radius	R5
Temperature resistance	-40 to +70°C

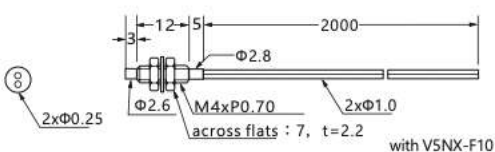

free cut