


## ■ M6 Diffuse fiber type

VFN-D075(R)\*




Model	VFN-D075(R)
Sensing	15/30/45mm
Min. bending radius	R2(R1)
Temperature resistance	-40 to +70°C

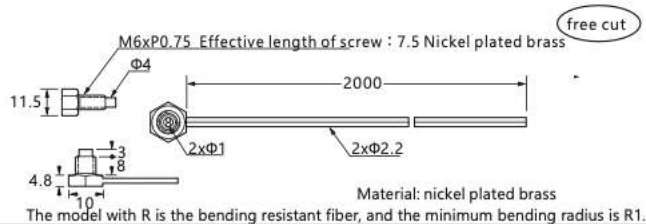

VFN-D076




Model	VFN-D076
Sensing	60/150/280mm
Min. bending radius	R25
Temperature resistance	-40 to +70°C

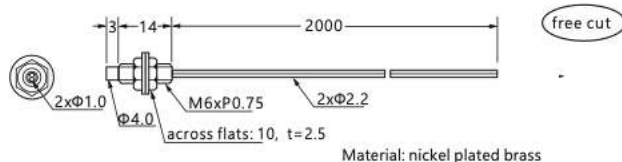

VFN-D080




Model	VFN-D080
Sensing	60/120/150mm
Min. bending radius	R22
Temperature resistance	-40 to +70°C

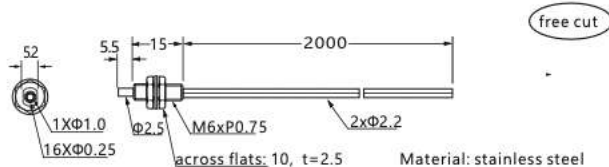

VFN-D159




Model	VFN-D159
Sensing	60/150/300mm
Min. bending radius	R25
Temperature resistance	-55 to +70°C

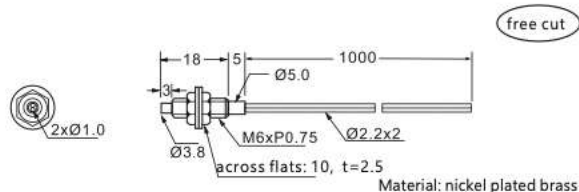

VFN-D161




Model	VFN-D161
Sensing	60/150/300mm
Min. bending radius	R25
Temperature resistance	-55 to +70°C

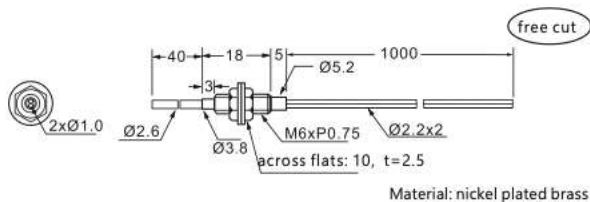

VFN-D162




Model	VFN-D162
Sensing	50/120/260mm
Min. bending radius	R25
Temperature resistance	-55 to +70°C

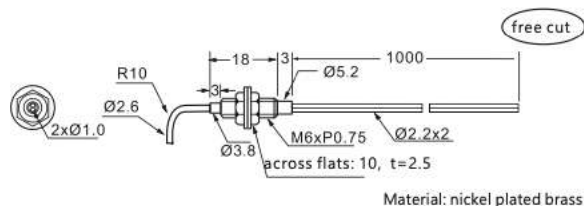

VFN-D163




Model	VFN-D163
Sensing	60/150/300mm
Min. bending radius	R25
Temperature resistance	-55 to +70°C

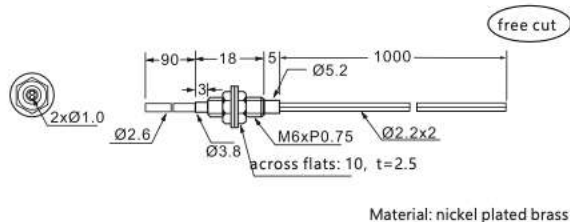

VFN-D165




Model	VFN-D165
Sensing	60/150/300mm
Min. bending radius	R25
Temperature resistance	-55 to +70°C

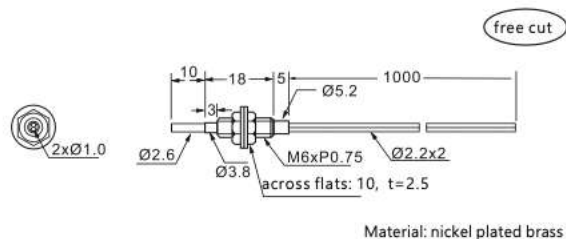

VFN-D166




Model	VFN-D166
Sensing	60/150/300mm
Min. bending radius	R25
Temperature resistance	-55 to +70°C

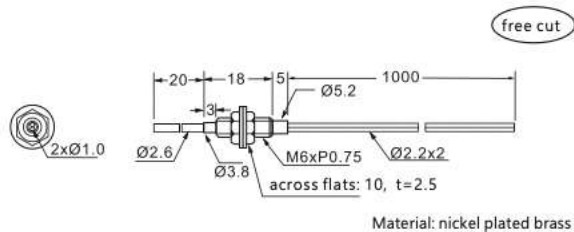

VFN-D093



Model	VFN-D093
Sensing	30/120/180mm
Min. bending radius	R25
Temperature resistance	-40 to +70°C

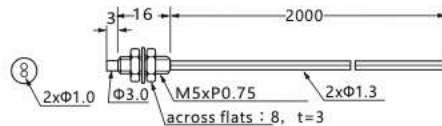


free cut

VFN-D094



Model	VFN-D094
Sensing	30/60/100mm
Min. bending radius	R10
Temperature resistance	-40 to +70°C

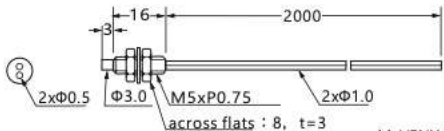

free cut

with V5NX-F10