

## FIXED DATAMATRIX & BARCODE SCANNER

VL90 MODEL



- Autofocus and auto-optimization of code reading parameters
- Powerful image processing and decoding algorithm
- Easy to control and integrate design
- Multiple-lighting unit
- Visual configuration software
- Barcodes and DataMatrix stable reading up to 60 fps speed.

# Compact Industrial Scanner



## Special integrated lighting

- ◇ The design of array light source ensures the uniformity of light intensity in the field of vision.
- ◇ The groups of area light source can be controlled independently to meet the requirements of different reading applications.
- ◇ Three lighting colors could be selected, that is red, white, blue. For high reflective surface, polarization
- ◇ light source and atomization light source can be selected.

## Visual setup software

- ◇ Online image view, convenient for installation and deployment.
- ◇ The graphical I / O logic setting interface facilitates the interaction with peripheral devices.
- ◇ Configuration parameters of the device and the output data.
- ◇ Windows version and Mac version are available.

## Industrial product standard

- ◇ IP65 dust proof and waterproof grade.
- ◇ Multiple I / O interfaces to meet industry standard.
- ◇ Support industrial field communication protocol, and support both TCP\IP Ethernet and RS232 communication mods .
- ◇ The chassis can rotate 90 degrees for easy installation in narrow space.

## Applications



Solar energy industry



Electronic manufacturing



Automobile manufacturing



Device integration



Product traceability



Laser marking and  
ink-jet marking

VL90 is an industrial code reader with autofocus stability. 1.2 megapixel High Performance CMOS sensor, multiple lighting units and powerful image processing with decoding algorithm. Stable and reliable solution for High speed and frequency reading high stability reading of high density Barcodes and DataMatrix

## Auto focus and auto optimization of code reading

- ◇ The built-in auto focus algorithm can automatically lock the focus distance according to reading requirement.
- ◇ The built-in parameters auto-adjustment algorithm can automatically adjust and optimize the camera's parameters according to the site environment and focusing distance.

## Powerful image processing and decoding algorithm

- ◇ Read 1.6 mil high density bar code and 1.2 mm × 1.2 mm micro bar code.
- ◇ Read up to 99 bar codes in the effective field of vision at one time.
- ◇ Excellent reading performance for challenging barcodes such as stained, distorted, low contrast and DPM.
- ◇ Meet the requirements of high frequency and high speed.

## Easy to control and integrate design

- ◇ Multiple I/O interfaces, different operating modes and output modes can be easily configured.
- ◇ Work together with ECS control box to realize the coordination of multiple devices, in order to meet the requirements of large field reading.
- ◇ Development of light source, algorithm and communication protocol can be carried out according to customer requirements.

# Compact Industrial Scanner

## Technical Data

Image Resolution 1280×960 (1.2 M pixels)

Sensor 1/3 inch CMOS

Frame Rate Maximum 60 frame/s

Trigger Mode Command trigger; I/O trigger; continuous reading mode; Presentation Mode

I/O Type 2 isolated inputs; 4 isolated output

LED 4 LED indicator lights (power, reading success, reading failure, Auto focus and parameter adjustment)

Illumination High brightness / polarization / atomization light source; red / White / Blue optional LED light source

Focusing mode Auto focus

Aiming System Laser aiming

Communication interfaces Ethernet, RS232

Power Supply 20 - 30 VDC

Power Consumption 1.9W (Standby status);  
14.4W ((Peak)(Note 1))

Case Material Aluminum alloy

Weight 192g

Dimensions 86mm×51mm×37.6mm  
( L×W× H )

Operating Temperature -10~50°C

Storage Temperature -20~70°C

IP Protecting Grade


Certification CE, ROHS

Readable Symbologies 1D, 2D and stack codes that meet national and international standards; OCR-A, OCR-B


Reading Accuracy 1D code : 1.6 mil  
2D code : 2 mil

Note 1: Measured without external load.

## FOV Diagram

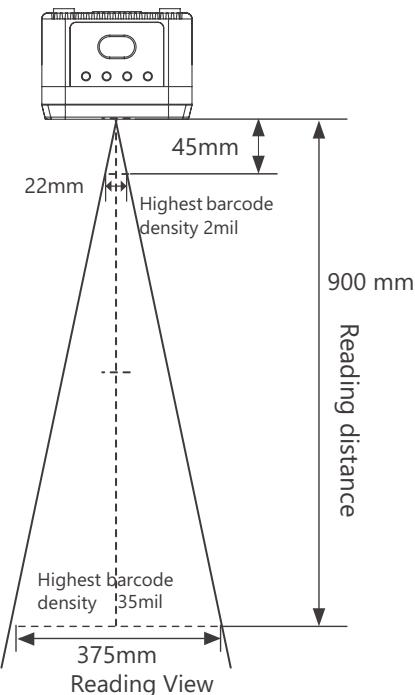

## Dimensions

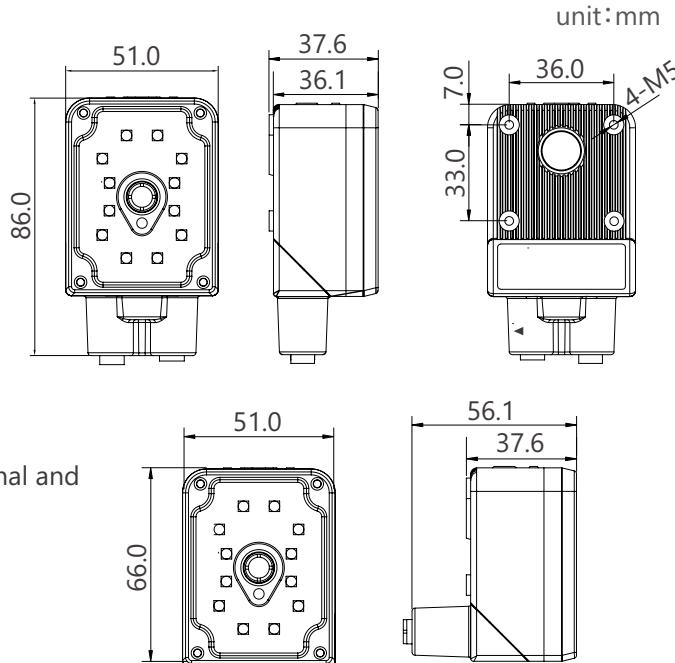

# CONTACT US

V5 Group Ltd.

Address: Yokneam Illit, Afek 11b, Israel

Web: [www.v5-group.com](http://www.v5-group.com)

Email: [info@v5-group.com](mailto:info@v5-group.com)

Phone: +972-532-860901



**Note:** We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. V5 GROUP Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in part – is forbidden without prior written consent of V5 GROUP Ltd.