



HIGH TORQUE HYBRID STEPPING MOTOR SPECIFICATIONS

General specifications		Electrical specifications	
Step Angle (°)	1.8	Rated Voltage (V)	12
Temperature Rise (°C)	80 Max (rated current, 2 phase on)	Rated Current (A)	0.4
Ambient temperature (°C)	-20~+50	Resistance Per Phase ($\pm 10\%$)	30 (25°C)
Number of Phase	2	Inductance Per Phase ($\pm 20\%$ mH)	30
Insulation Resistance	100M Ω , Min (500VDC)	Holding Torque (Kg.cm)	2.6
Insulation Class	Class B	Detent Torque (g.cm)	150
Max.radial force (N)	28 (20mm from the flange)	Rotor Inertia (g.cm ²)	54
Max.axial force (N)	10	Weight (Kg)	0.28


● Pull out torque curve:

VOLTAGE: 28VDC, CONSTANT CURRENT: 0.4A, HALF STEP

● Wiring Diagram:

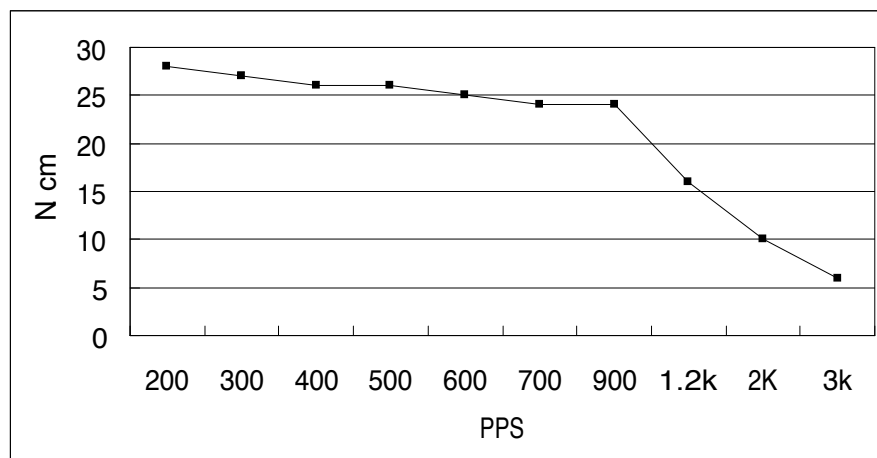

● Dimensions: (unit=mm)

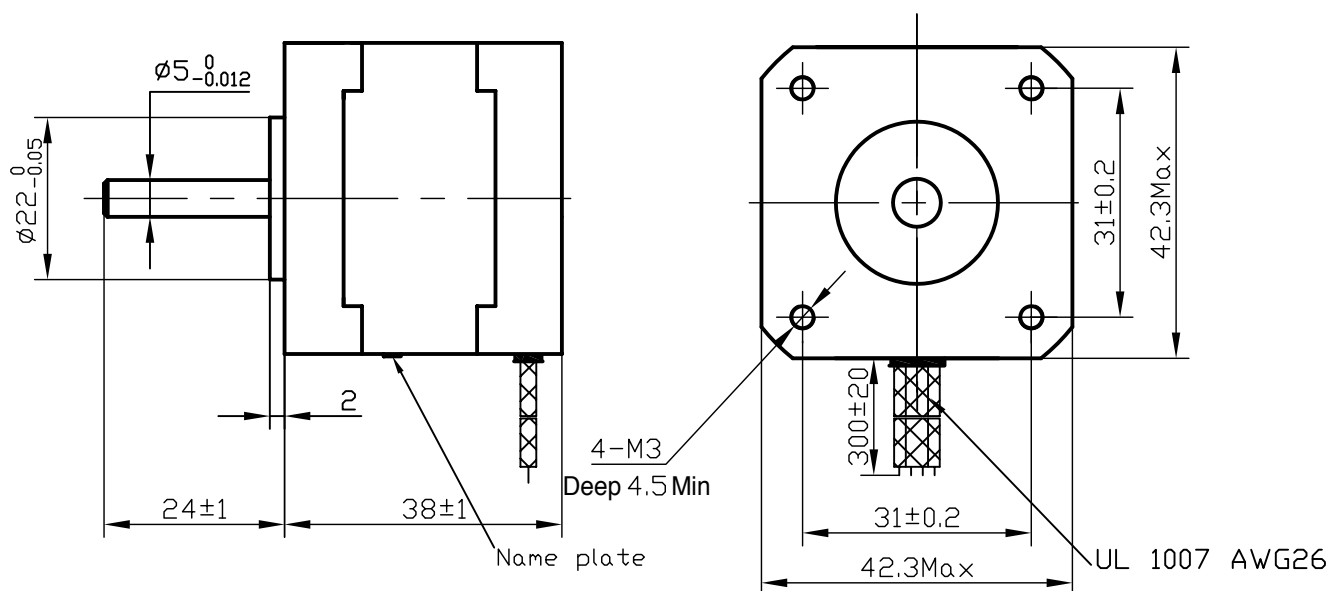

					SY42STH38-0406A	TECHNICAL CONDITIONS
△						
REV	REVISIONS	DESCRIPTION	BY	DATE	CHANGZHOU SONGYANG MACHINERY & ELECTRONICS NEW TECHNIC INSTITUTE	06003800 2
DRAW	袁卫国					
CHECK						
APPROVE						