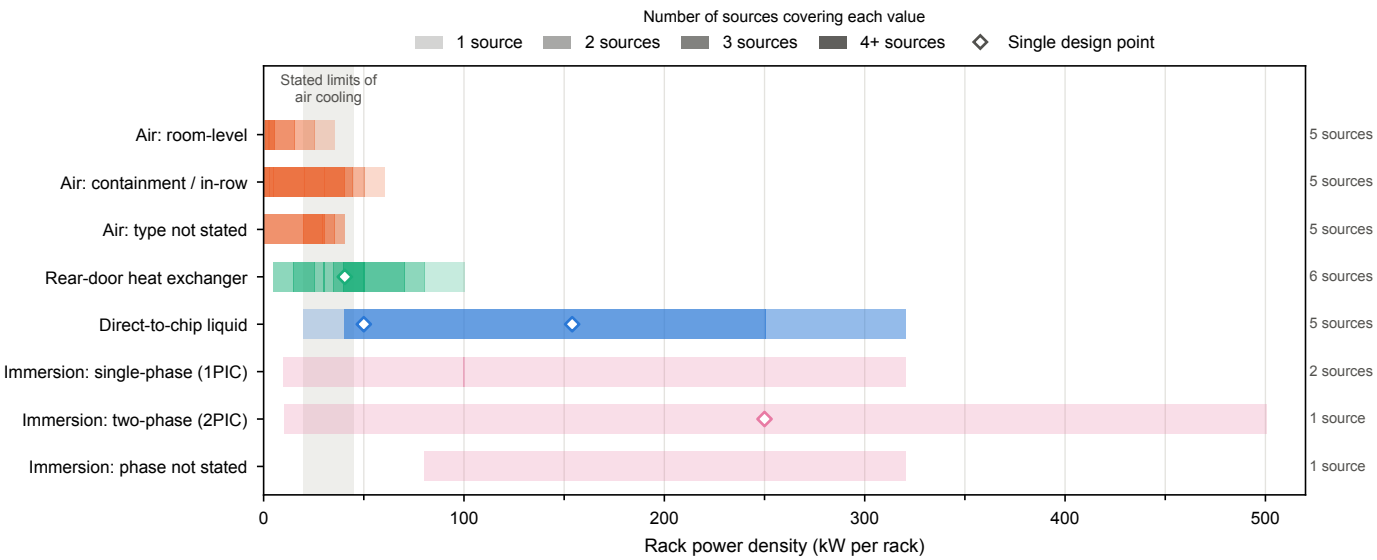
Number of sources covering each value
1 source
2 sources
3 sources
4+ sources
Single design point
Stated limits of air cooling
Air: room-level
Air: containment / in-row
Air: type not stated
Rear-door heat exchanger
Direct-to-chip liquid
Immersion: single-phase (1PIC)
Immersion: two-phase (2PIC)
Immersion: phase not stated
5 sources
5 sources
5 sources
6 sources
5 sources
2 sources
1 source
1 source
0
100
200
300
400
500
Rack power density (kW per rack)