


## RR-8.1.1: RAISE DISPLAY PROCEDURE (pg 1 of 1)

## Removal






- 2. Remove 3 mounting screws and right VDE Cover.
- 3. Loosen 2 wing screws.
- 4. Raise Display to upright position.

## Replacement

- 1. Reposition and attach Display Assembly with 2 wing screws.
- 2. Install right VDE Cover and fasten 3 mounting screws.
- 3. Install Enclosure Assembly.

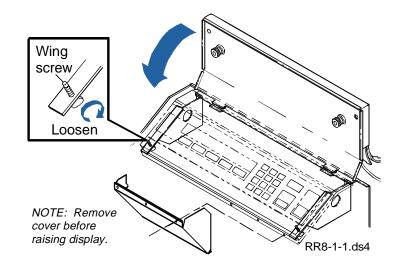

Removal & Replacement Procedures LCx® Analyzer Service Manual (Text P/N 47278-102)

Chapter

Contents

Manual Contents

RR-8.1.1: Raise Display Procedure

CD Main Screen

Index

4 - 91

PL-8