




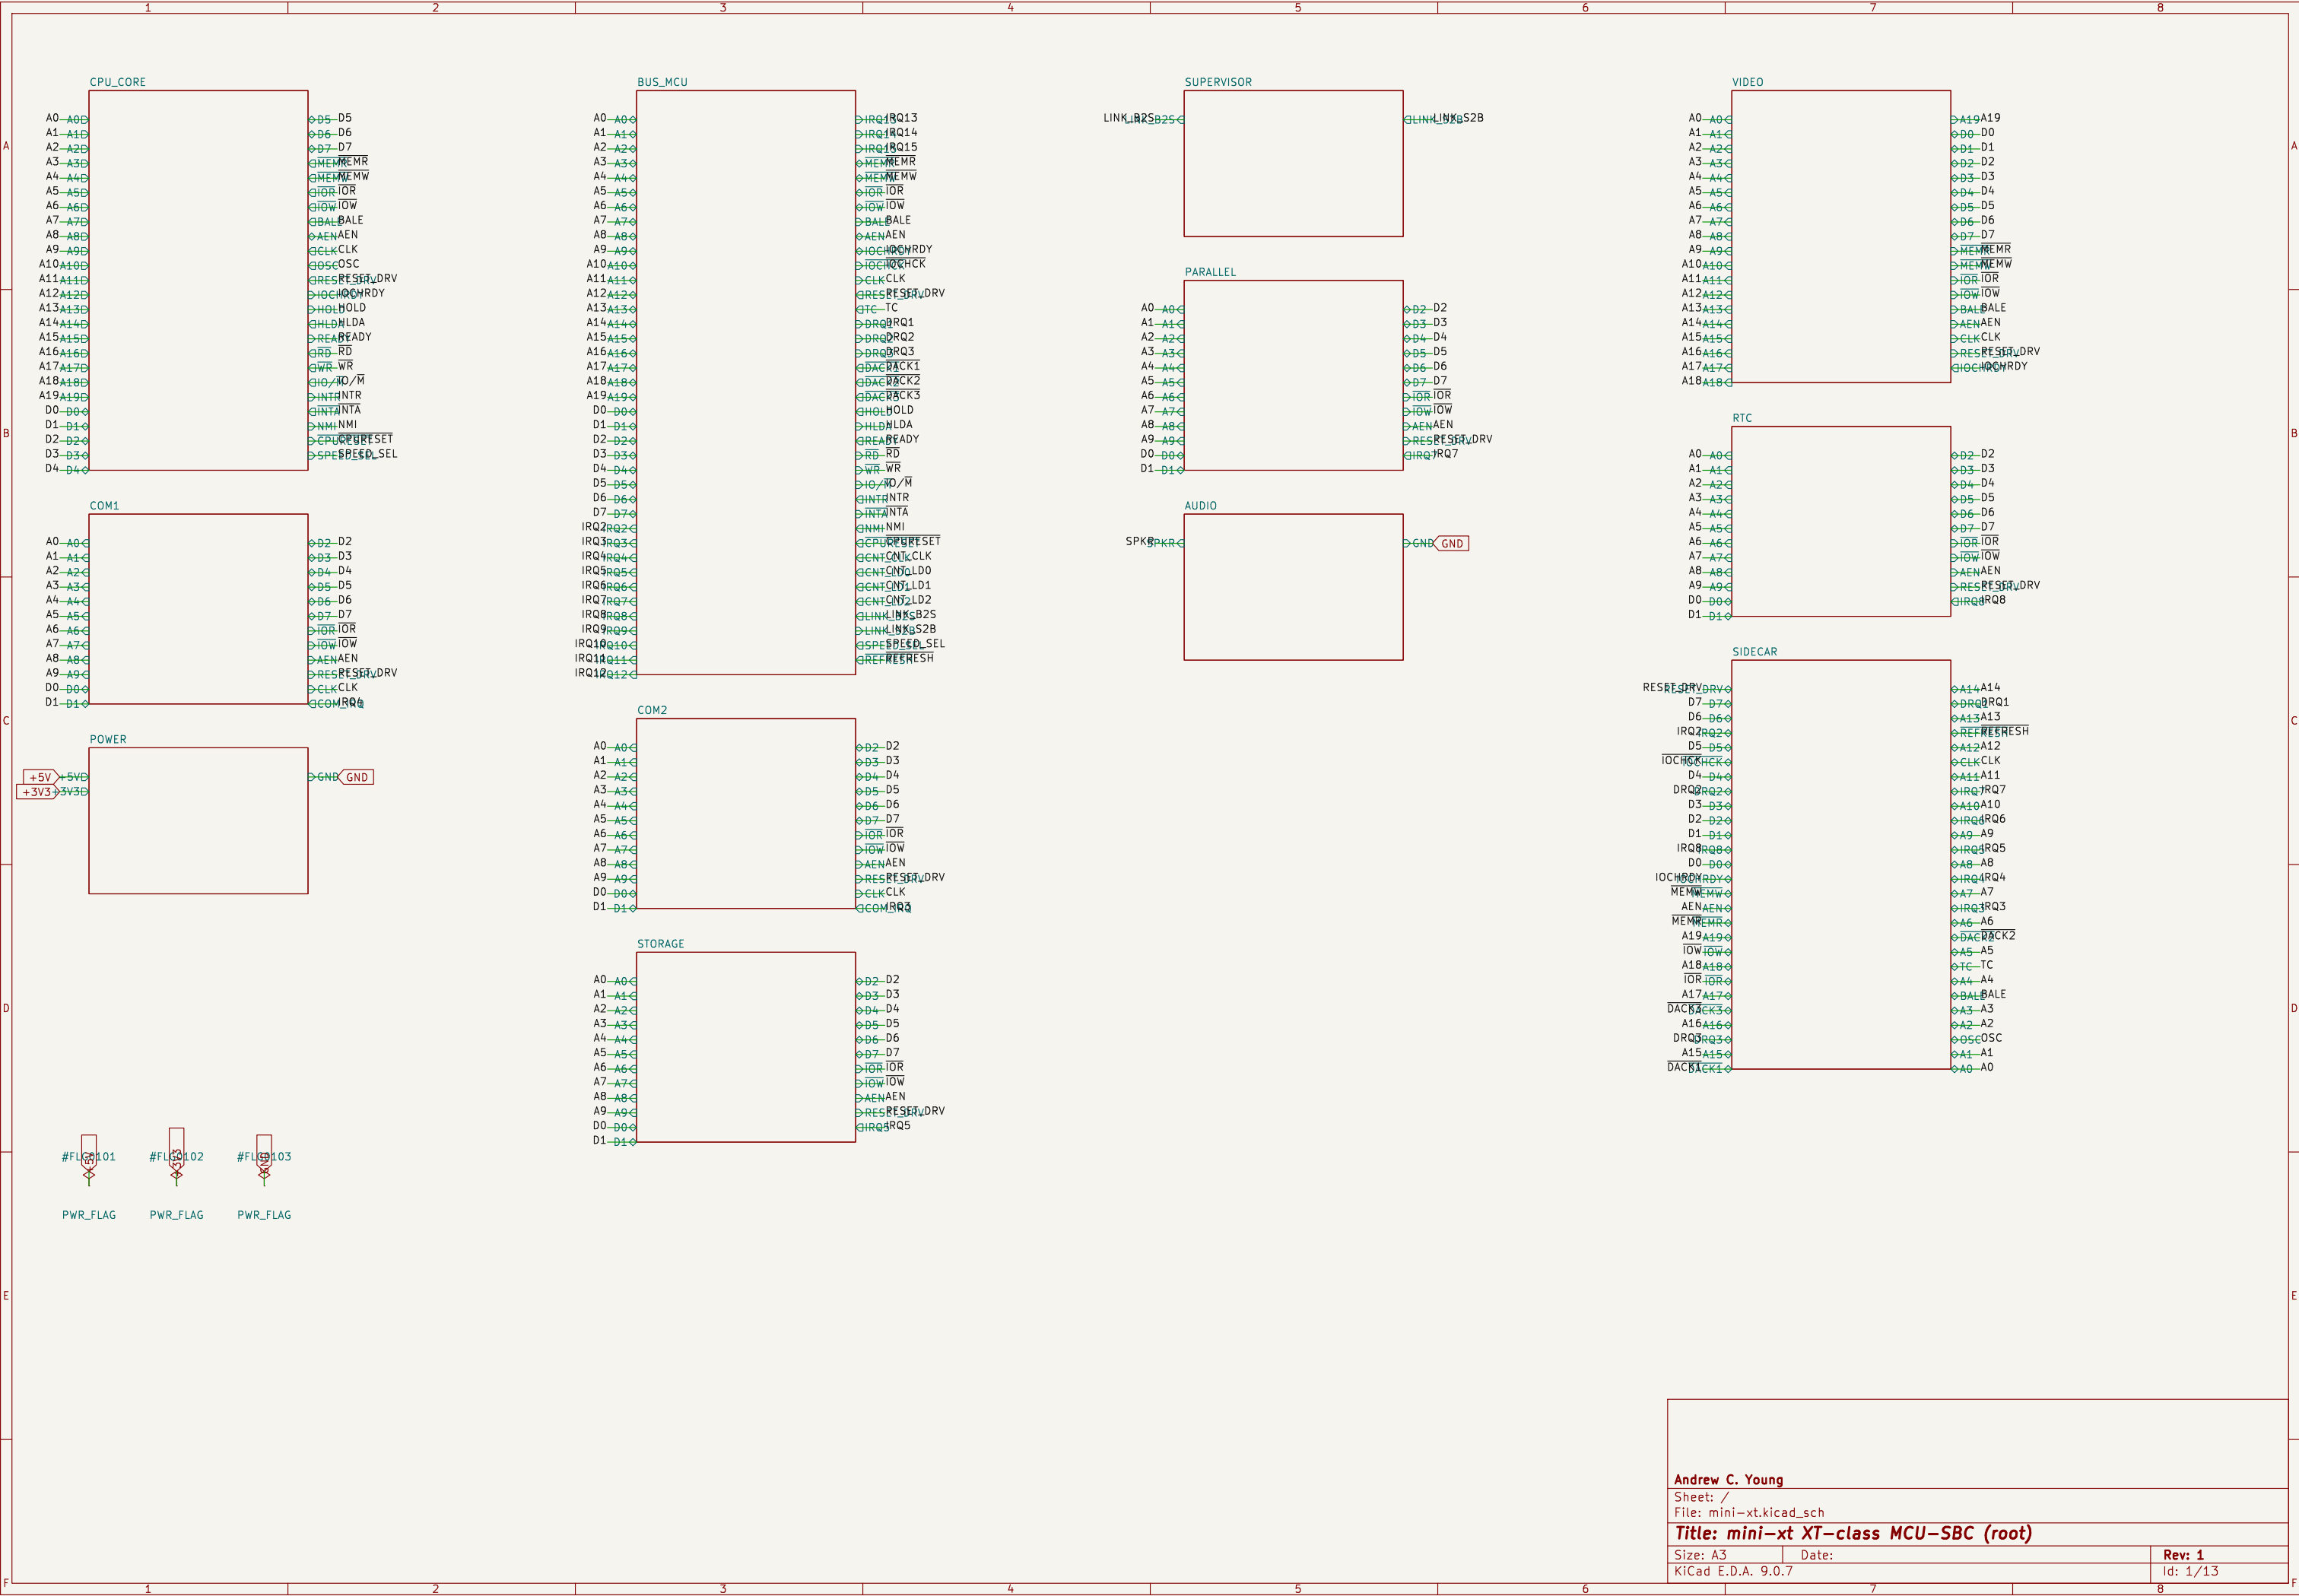

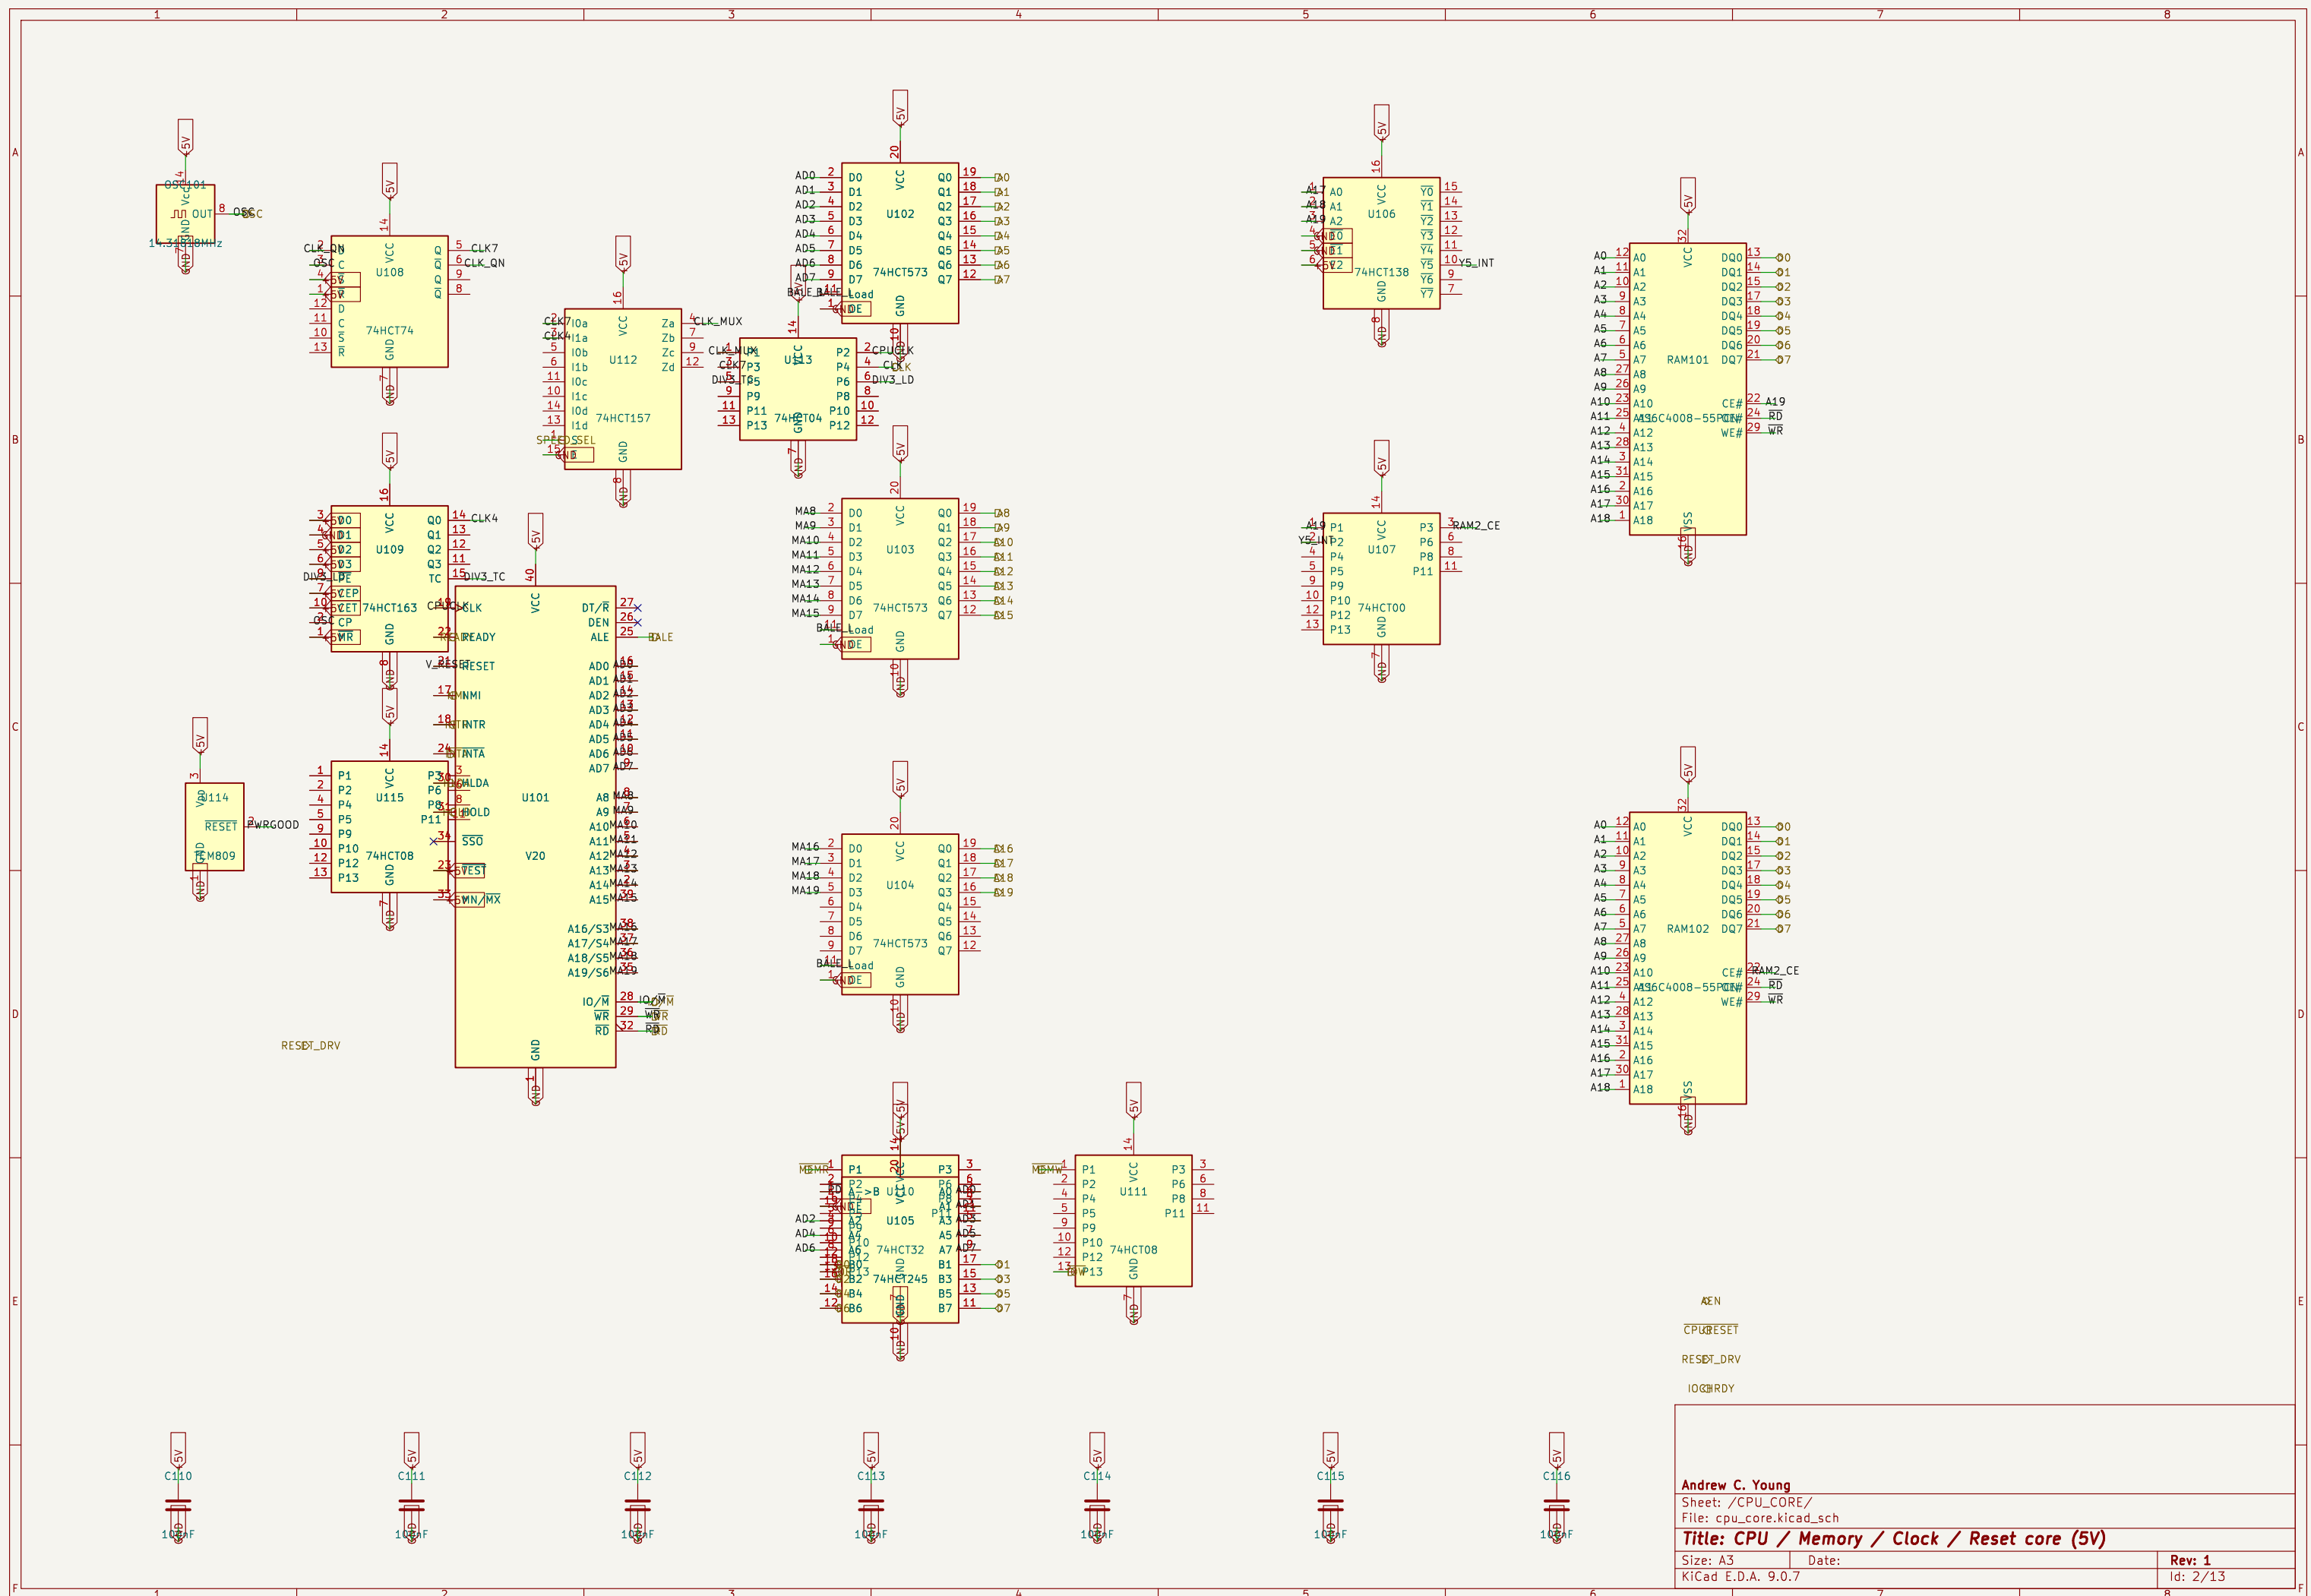

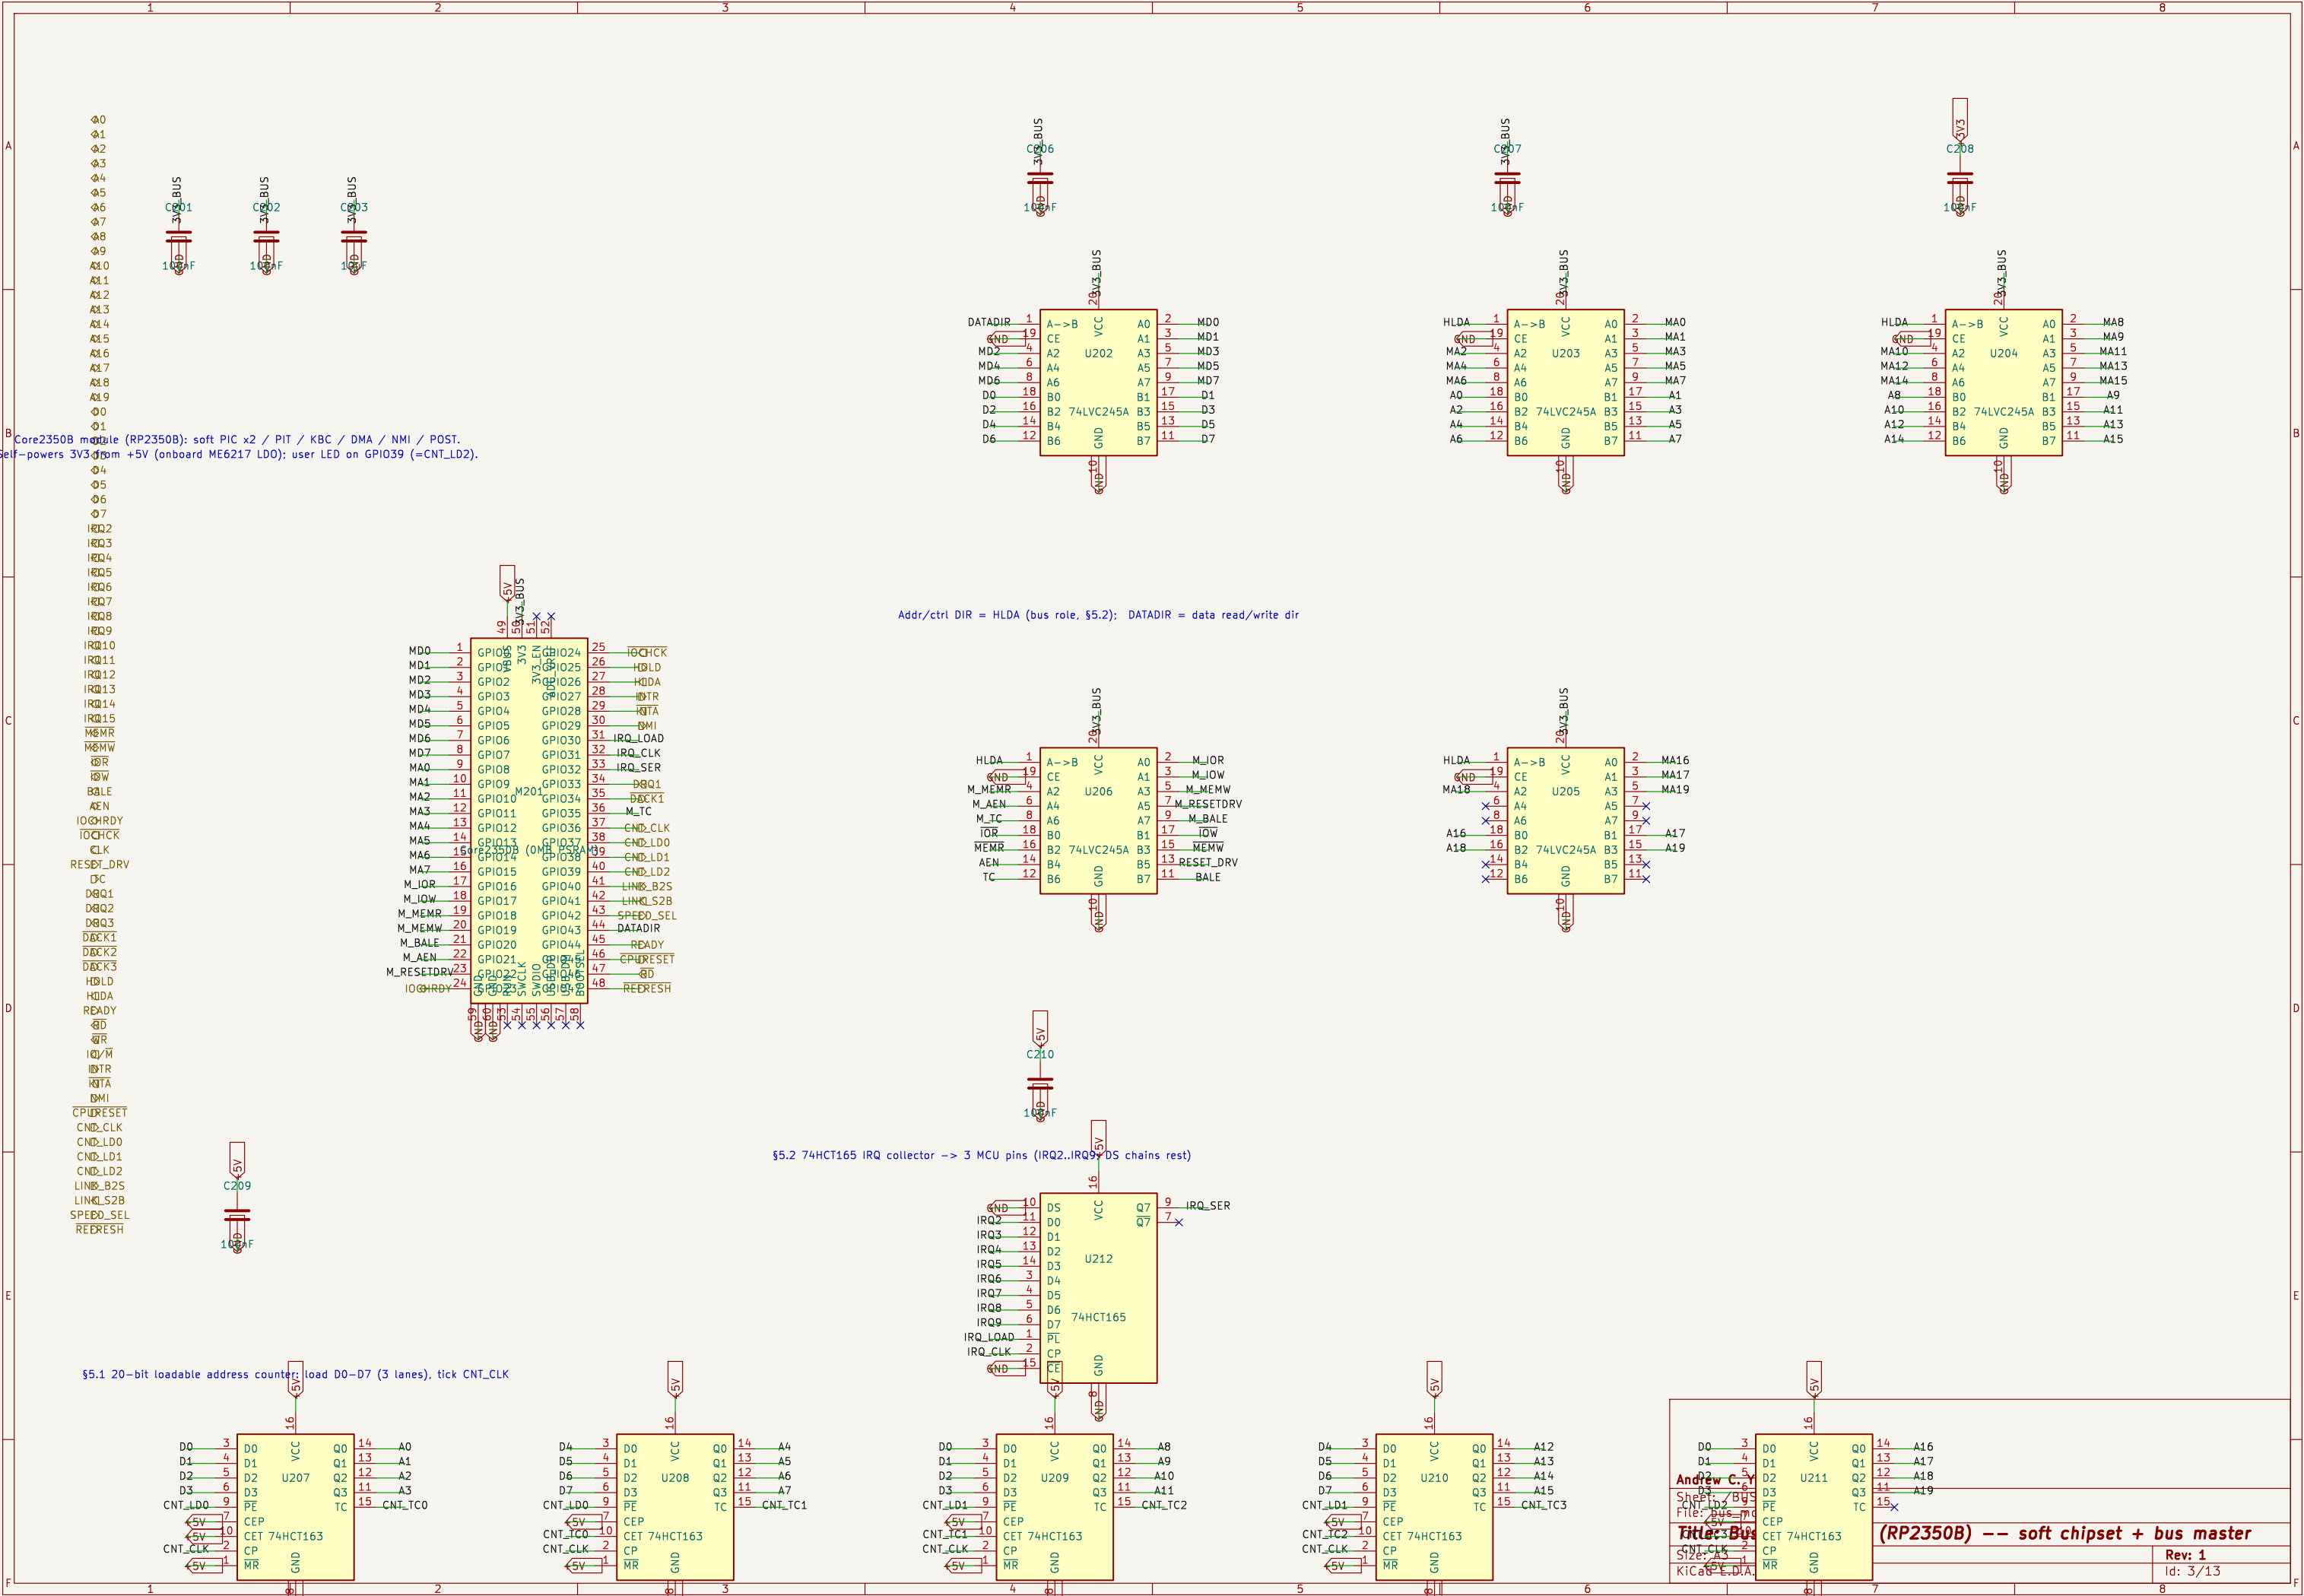


Core2350B module (RP2350B): soft PIC x2 / PIT / KBC / DMA / NMI / POST.
Self-powers 3V3 from +5V (onboard ME6217 LDO); user LED on GPIO39 (=CNT_LD2).

Addr/ctrl DIR = HLDA (bus role, \$5.2): DATADIR = data read/write dir

\$5.2 74HCT165 IRQ collector -> 3 MCU pins (IRQ2..IRQ9; DS chains rest)

\$5.1 20-bit loadable address counter: load D0-D7 (3 lanes), tick CNT_CLK

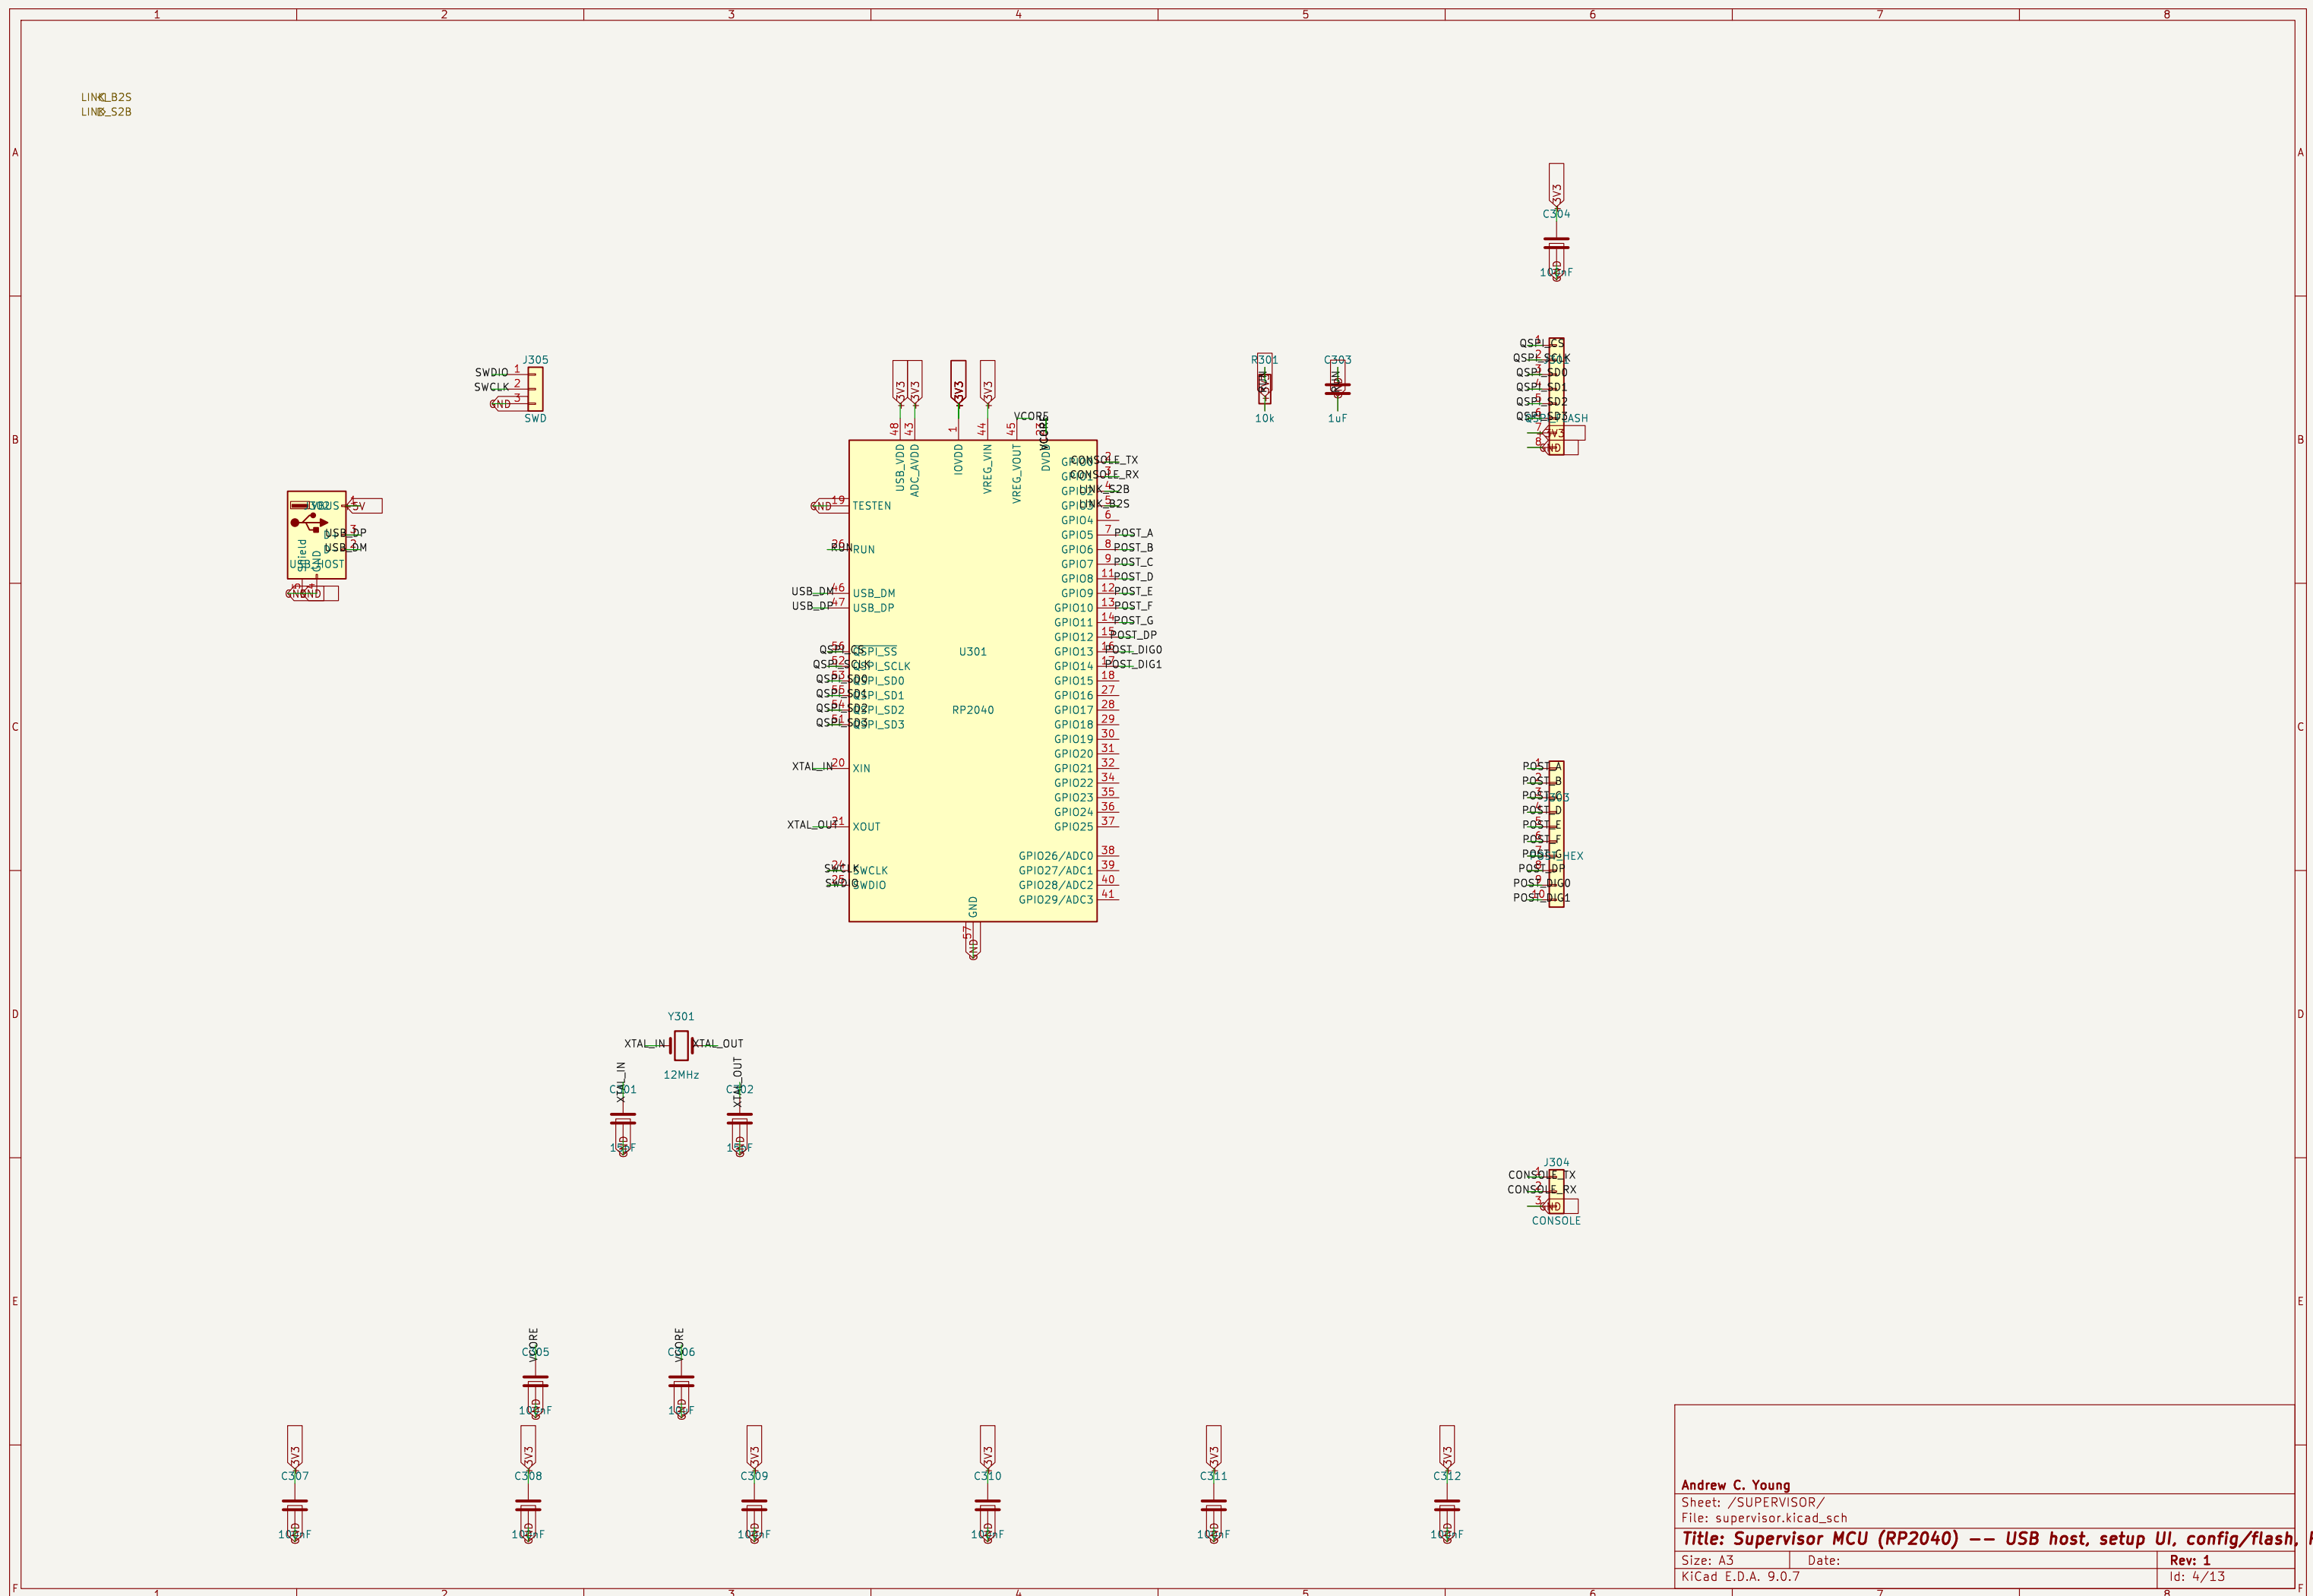

0xBFFF and 3B4/3B5/3B8/3BA/3BF + 3D4/3D5/3D8/3D9/3DA from snooped A17-A19/A0-A9. No Y5, no link, no host RAM (design S8).

