BioVent

DENTAL IMPLANT SYSTEMS

PRODUCT CATALOG

ALL YOU NEED IS HERE

INDEX

Implants

Vtx Two Piece	2
Compressive	3
Ptygoid	4
Zygomatic	5

Prosthetics

Lab Compenents	7
Straight Abutments	8
Anled Abutments	9
Temporary Abutments	10
CAD/CAM	11
Multi-Unit	12
Ball Attachment	13
Locater	14

COMPANY PROFILE

AG MEDICAL GMBH has more than 28 years of global success in manufacturing and supplying high-quality dental implants and prosthetic solutions curated to all dentists.

Our implant assortment meticulously provides technological and revolutionary dental solutions suited for dentists to achieve the most optimal results. We offer innovative dental implants, CAD/CAM solutions, Biovent Surgical System, Single and Multi-Unit, and every prosthetic variation. We emphasize our collaboration with dentists by offering tailored education programs at International AG MEDICAL GMBH Academy, in addition to consultancy and support services whenever needed. Biovent strives for excellence by modernizing the dental industry with continuous product innovations. The effectiveness and premium-quality performance of our products are a result of successful R&D that ensures the highest quality.

VTX TWO PIECE IMPLANT

BioVent DENTAL IMPLANT SYSTEMS

Material:	Titanium Alloy Ti 6Al 4V ELI | CaP
Item includes:	Cover screw and implant carrier
Connection:	Screw type implant 2.42 mm internal hex
Surface:	SLA surface treatment

Diameter \ Length	6m	8m	10m	11.5m	13m	16m
Ø 3.3	-	CMX 833	CMX 1033	CMX 11533	CMX 1333	CMX 1633
Ø 3.75	CMX 6375	CMX 8375	CMX 10375	CMX 115375	CMX 13375	CMX 16375
Ø 4.2	CMX 642	CMX 842	CMX 1042	CMX 11542	CMX 1342	CMX 1642
Ø 4.7	CMX 647	CMX 847	CMX 1047	CMX 11547	CMX 1347	CMX 1647
Ø 5.2	CMX 652	CMX 852	CMX 1052	CMX 11552	CMX 1352	CMX 1652
Ø 6	CMX 66	CMX 86	CMX 106	CMX 1156	CMX 136	CMX 166

Patro offers the perfect solution for a unique one-piece implant with its flexible neck design that reaches **up to 25 angulation degrees**

The implant s versatility offers immediate loading in **both single and multiple-unit restorations**



Conveniently it can be placed in the tightest and **narrowest ridges.**

Platform One-Piece

One-Piece Implant Analog

Height mm	21mm
Ref.	CAGM-215

Material: Stainless Steel

Transfer for One-Piece Implant

Height mm	11mm
Ref.	CAGM-306

Material: Plastic

Diameter \ Length	6m	8m	10m	11.5m	13m	16m
Ø 3.3	-	-	MX 103	MX 1153	MX 133	MX 163
Ø 3.3	-	MX 833	MX 1033	MX 11533	MX 1333	MX 1633
Ø 3.75	MX 6375	MX 8375	MX 10375	MX 115375	MX 13375	MX 16375
Ø 4.2	MX 642	MX 842	MX 1042	MX 11542	MX 1342	MX 1642
Ø 4.7	MX 647	MX 847	MX 1047	MX 11547	MX 1347	MX 1647

PTYGOID IMPLANT

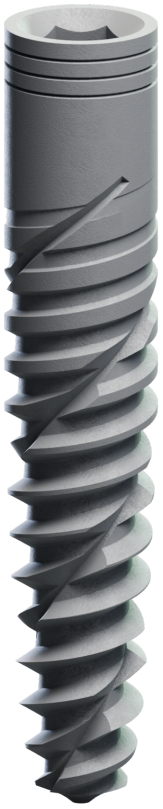

Material:	Titanium Alloy Ti 6Al 4V ELI | CaP
Item includes:	Cover screw and implant carrier
Connection:	Screw type implant 2.42 mm internal hex
Surface:	SLA surface treatment

Diameter \ Length	16mm	19mm	22mm
Ø 4.2	CMX 1642	CMX 1942	CMX 2242

Drills

- Initial Drill
- Point Drill
- Side Cutter
- S 2.0/2.5/3.0
- S 2.8/3.2
- L 2.0/2.5/3.0
- L 2.8/3.2
- L 3.2/3.7

Diameter \ Length	35mm	37.5mm	40mm	42.5mm	45mm	47.5mm	50mm	52.5mm	55mm
Ø 4.2	CAITI3542	CAITI3742	CAITI4042	CAITI4242	CAITI4542	CAITI4742	CAITI5042	CAITI5242	CAITI5542

BioVent
DENTAL IMPLANT SYSTEMS

Standard Healing Cap Ø4.2mm

Height mm	1mm	2mm	3mm	4mm	5mm	6mm	7mm
Ref.	CAGM-203-1	CAGM-203-2	CAGM-203-3	CAGM-203-4	CAGM-203-5	CAGM-203-6	CAGM-203-7

Additional Info: Recommended torque - manual only light finger tight (5-10 Ncm) using hand driver 1.25 mm.

Material: Titanium

Closed Tray Impression Transfers

Description	with click connection	Concave with click connection	with screw connection
Height mm	11mm	11mm	8mm
Ref.	CAGM-302	CAGM-302-C	CAGM-305

Description	with plastic sleeve	Plastic sleeve - 4pcs
Height mm	8.5mm	11mm
Ref.	CAGM-304	CAGM-304-P

Additional Info: Recommended torque - manual only light finger tight (5-10 Ncm) using hand driver 1.25 mm.

Material: Stainless Steel

Open Tray Impression Transfers

Description	Open tray transfer
Height mm	14mm
Ref.	CAGM-301

Additional Info: Recommended torque - manual only light finger tight (5-10 Ncm) using hand driver 1.25 mm.

Material: Stainless Steel

Standard Platform Implant Analog

Description	Implant analog
Height mm	12mm
Ref.	CAGM-214

Straight Abutments

Description	Short thin	Long thin	Short standard	Standard
Height mm	7mm	10mm	7mm	7mm
Ref.	CAGM-104S	CAGM-104	CAGM-101S	CAGM-101

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

Description	Short wide	Wide	Long base	Long neck
Height mm	7mm	10mm	13mm	15mm
Ref.	CAGM-110S	CAGM-110	CAGM-108	CAGM-109

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

Shoulder Abutments

Description	Shoulder -1mm	Shoulder -2mm	Shoulder 3mm	Shoulder 4mm
Height mm	10mm	11mm	12mm	13mm
Ref.	CAGM-602-1	CAGM-602-2	CAGM-602-3	CAGM-602-4

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

Esthetic Abutments

Description	Esthetic - 1mm	Esthetic - 2mm	Esthetic - 3mm
Height mm	10mm	11mm	12mm
Ref.	CAGM-802-1	CAGM-802-2	CAGM-802-3

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

15° Angulated Abutments

Description	15° Thin	15° Short	15° Standard	15° Long
Height mm	9.5mm	7mm	9.5mm	12mm
Ref.	CAGM-102T	CAGM-102S	CAGM-102	CAGM-107

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

15° Angulated Esthetic Abutments

Description	15° Esthetic - 1mm	15° Esthetic - 2mm	15° Esthetic - 3mm
Height mm	10mm	11mm	12mm
Ref.	CAGM-102-E1	CAGM-102-E2	CAGM-102-E2

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

25° Angulated Abutments

Description	25° Short	25° Standard	25° Long
Height mm	7mm	9.5mm	12mm
Ref.	CAGM-103S	CAGM-103	CAGM-111

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

25° Angulated Esthetic Abutments

Description	25° Esthetic - 1mm	25° Esthetic - 2mm	25° Esthetic - 3mm
Height mm	10mm	11mm	12mm
Ref.	CAGM-103-E1	CAGM-103-E2	CAGM-103-E3

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

35° - 45° Angulated Abutments

Description	35°	45°
Height mm	11mm	11mm
Ref.	CAGM-106	CAGM-145

Additional Info: Recommended torque - 25 Ncm.

Material: Titanium

UCLA Abutment for Casting

Description	Castable hexed abutment CoCr base
Height mm	16mm
Ref.	CUCLA

Additional Info: Recommended torque - 25 Ncm.

Material: CoCr / Plastic

Direct Prosthetic Screw

Description	Standard platform screw
Height mm	7.7mm
Ref.	CAGM-202

Plastic Abutments for Casting Height 11mm

Description	Hex wide profile	Hex sleeve	Non-Hex sleeve
Ref.	CAGM-P1	CAGM-P3	CAGM-P4

Additional Info: Recommended torque - 25 Ncm. - Supplied with prosthetic screw AGM-202

Material: Plastic

Temporary Abutments

Description	Long screw -2pcs	Hex	Non-Hex	Hex	Non-Hex
Height mm	15mm	10mm	10mm	10mm	10mm
Ref.	CAGM-900	CAGM-901	CAGM-902	CAGM-903	CAGM-904

Additional Info: Recommended torque - 20 Ncm. - Supplied with prosthetic screw AGM-202

Material: Titanium / Peek

Multi Unit Ø4.6mm

Height mm	1mm	2mm	3mm
Ref.	CAGM-207-1H	CAGM-207-2H	CAGM-207-3H

Additional Info: Recommended torque - 25 Ncm. Anti rotation anatomic connector used for single unit screw retained restorations.

Material: Titanium

Multi Unit Parts

Description	Transfer open tray	Analog	Healing Cap
Height mm	22mm	9.5mm	3mm
Ref.	CAGM-301-H	CAGM-214-H	CAGM-509-H

Additional Info: Recommended torque - manual only light finger tight (5-10 Ncm) using hand driver 1.25 mm.

Material: Stainless Steel / Titanium

Multi Unit Parts

Description	Screw - 2pcs	Plastic	Temporary
Height mm	4mm	12mm	12mm
Ref.	CAGM-207-SCH	CAGM-207-PH	CAGM-207-PK

Additional Info: Recommended torque - 20 Ncm. - Using hex driver 1.25 mm.

Material: Titanium / Plastic / Peek

Scan Body

Height mm	7mm		10mm		9mm
Material	PEEK		PEEK		Stainless Steel
Ref.	CSBH-07		CSBH-10		CAD-SP

Digital Analog

Hex Ti-Base

Height mm	0.5mm		1.5mm		3.0mm
Material	Titanium		PEEK		Stainless Steel
Ref.	CTBH-05		CTBH-15		CTBH-30

Non-Hex Ti-Base

Height mm	0.5mm		1.5mm		3.0mm
Material	Titanium		PEEK		Stainless Steel
Ref.	CTBNH-05		CTBNH-15		CTBNH-30

Hex Ti-Base Compatible Sirona

Height mm	1.0mm
Material	Titanium
Ref.	CTBS

Suggested Workflow:

Scanning:
Scan intraorally or on your model with an Biovent scan Body.
Designing:
In the Biovent implant library, select the implant scan Body and Ti-Base height.
Design the implant's restoration.
Milling:
Send the design file to mill your restoration.
Cementation:
Cement the milled restoration on Ti-Base.

Straight Multi-Unit Ø5.0mm

Height mm	1mm	2mm	3mm	4mm	5mm
Ref.	CAGM-700-1	CAGM-700-2	CAGM-700-3	CAGM-700-4	CAGM-700-5

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

17° Angulated Multi-Unit Ø5.0mm

Height mm	1mm	2mm	3mm
Ref.	CAGM-717-1	CAGM-717-2	CAGM-717-3

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

30° Angulated Multi-Unit Ø5.0mm

Height mm	1mm	2mm	3mm
Ref.	CAGM-730-1	CAGM-730-2	CAGM-730-3

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

45° Angulated Multi-Unit Ø5.0mm

Height mm	1mm
Ref.	CAGM-745-1

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

Multi-Unit Prosthetics

Description	Transfer open tray	Analog	Healing Cap
Height mm	22mm	12mm	5mm
Ref.	CAGM-508	CAGM-507	CAGM-509

Additional Info: Recommended torque - 5 Ncm. - Using hex driver 1.25 mm.

Material: Stainless Steel / Titanium

Multi-Unit Prosthetics

Description	Prosthetic screw - 2pcs	Temporary cylinder	Plastic cylinder	Temporary PEEK cylinder
Height mm	4.5mm	12mm	12mm	12mm
Ref.	CAGM-506-SC	CAGM-505	CAGM-506	CAGM-512

Additional Info: Recommended torque - manual only light finger tight (5-10 Ncm) using hand driver 1.25 mm.

Material: Titanium / Plastic / Peek

Multi-Unit CAD/CAM

Scan Post

Height mm	7mm
Material	PEEK
Ref.	CSBMU

Digital Analog

9mm	
Stainless Steel	
CAD-MU	

Non-Hex Ti-Base

0.3mm	
Titanium	
CTBMU	

Standard Ball Attachment Ø4.2mm

Height mm	0.5mm	1mm	2mm	3mm	4mm	5mm	6mm	7mm
Ref.	CAGM-105-0.5	CAGM-105-1	CAGM-105-2	CAGM-105-3	CAGM-105-4	CAGM-105-5	CAGM-105-6	CAGM-105-7

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

Angulated Multi Base Height 1.5mm

Description	Multi base 17°	Multi base 30°
Ref.	CAGM-501	CAGM-502

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

Ball Attachment for Multi Base

Height mm	1mm	2mm	3mm
Ref.	CAGM-504-1	CAGM-504-2	CAGM-504-3

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

Locater Ø4.5mm

Height mm	1mm	2mm	3mm	4mm	5mm
Ref.	CAGM-106-1	CAGM-106-2	CAGM-106-3	CAGM-106-4	CAGM-106-5

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

Plastic Cap for Locater

Description	Standard	Soft	Hard
Ref.	CAGM-106-P	CAGM-106-PS	CAGM-106-PH

Additional Info: Used for all types of Locater

Material: Plastic

Metal Housing and Protective Disk

Description	Metal housing	Protective disk
Height mm	2.8mm	0.5mm
Ref.	CAGM-106-M	CAGM-106-D

Additional Info: Used for all types of Lock

Material: Stainless Steel / Plastic

Angulated Multi Base Height 1.5mm

Description	Multi base 17°	Multi base 30°
Ref.	CAGM-501	CAGM-502

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

Lock for Multi Base Ø4.5mm

Height mm	1mm	2mm	3mm
Ref.	CAGM-510-1	CAGM-510-2	CAGM-510-3

Additional Info: Recommended torque - 25 Ncm. - Using hex driver 1.25 mm.

Material: Titanium

BioVent
DENTAL IMPLANT SYSTEMS

NOTE

BioVent

DENTAL IMPLANT SYSTEMS

MADE IN GERMANY

International Headquarters:
Friesdorfer Str. 53175 ,151 Bonn, Germany.
+491735296109
www.biovent-implant.com