


Per-hop slowdown vs. Corollary 5 bound

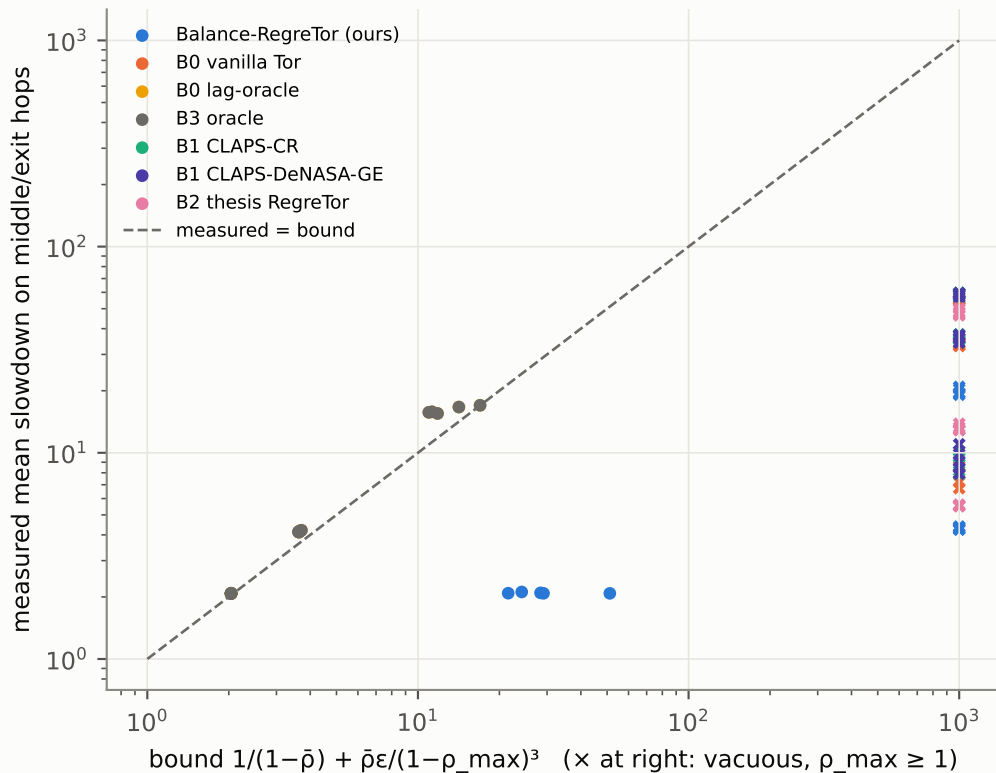

one point per (scheme, load, seed); $\rho_{\max}$ = largest time-averaged fullness among relays the optimum routes pool traffic through (guards overloaded by fixed guard traffic excluded); slowdown capped at $\rho = 0.99$