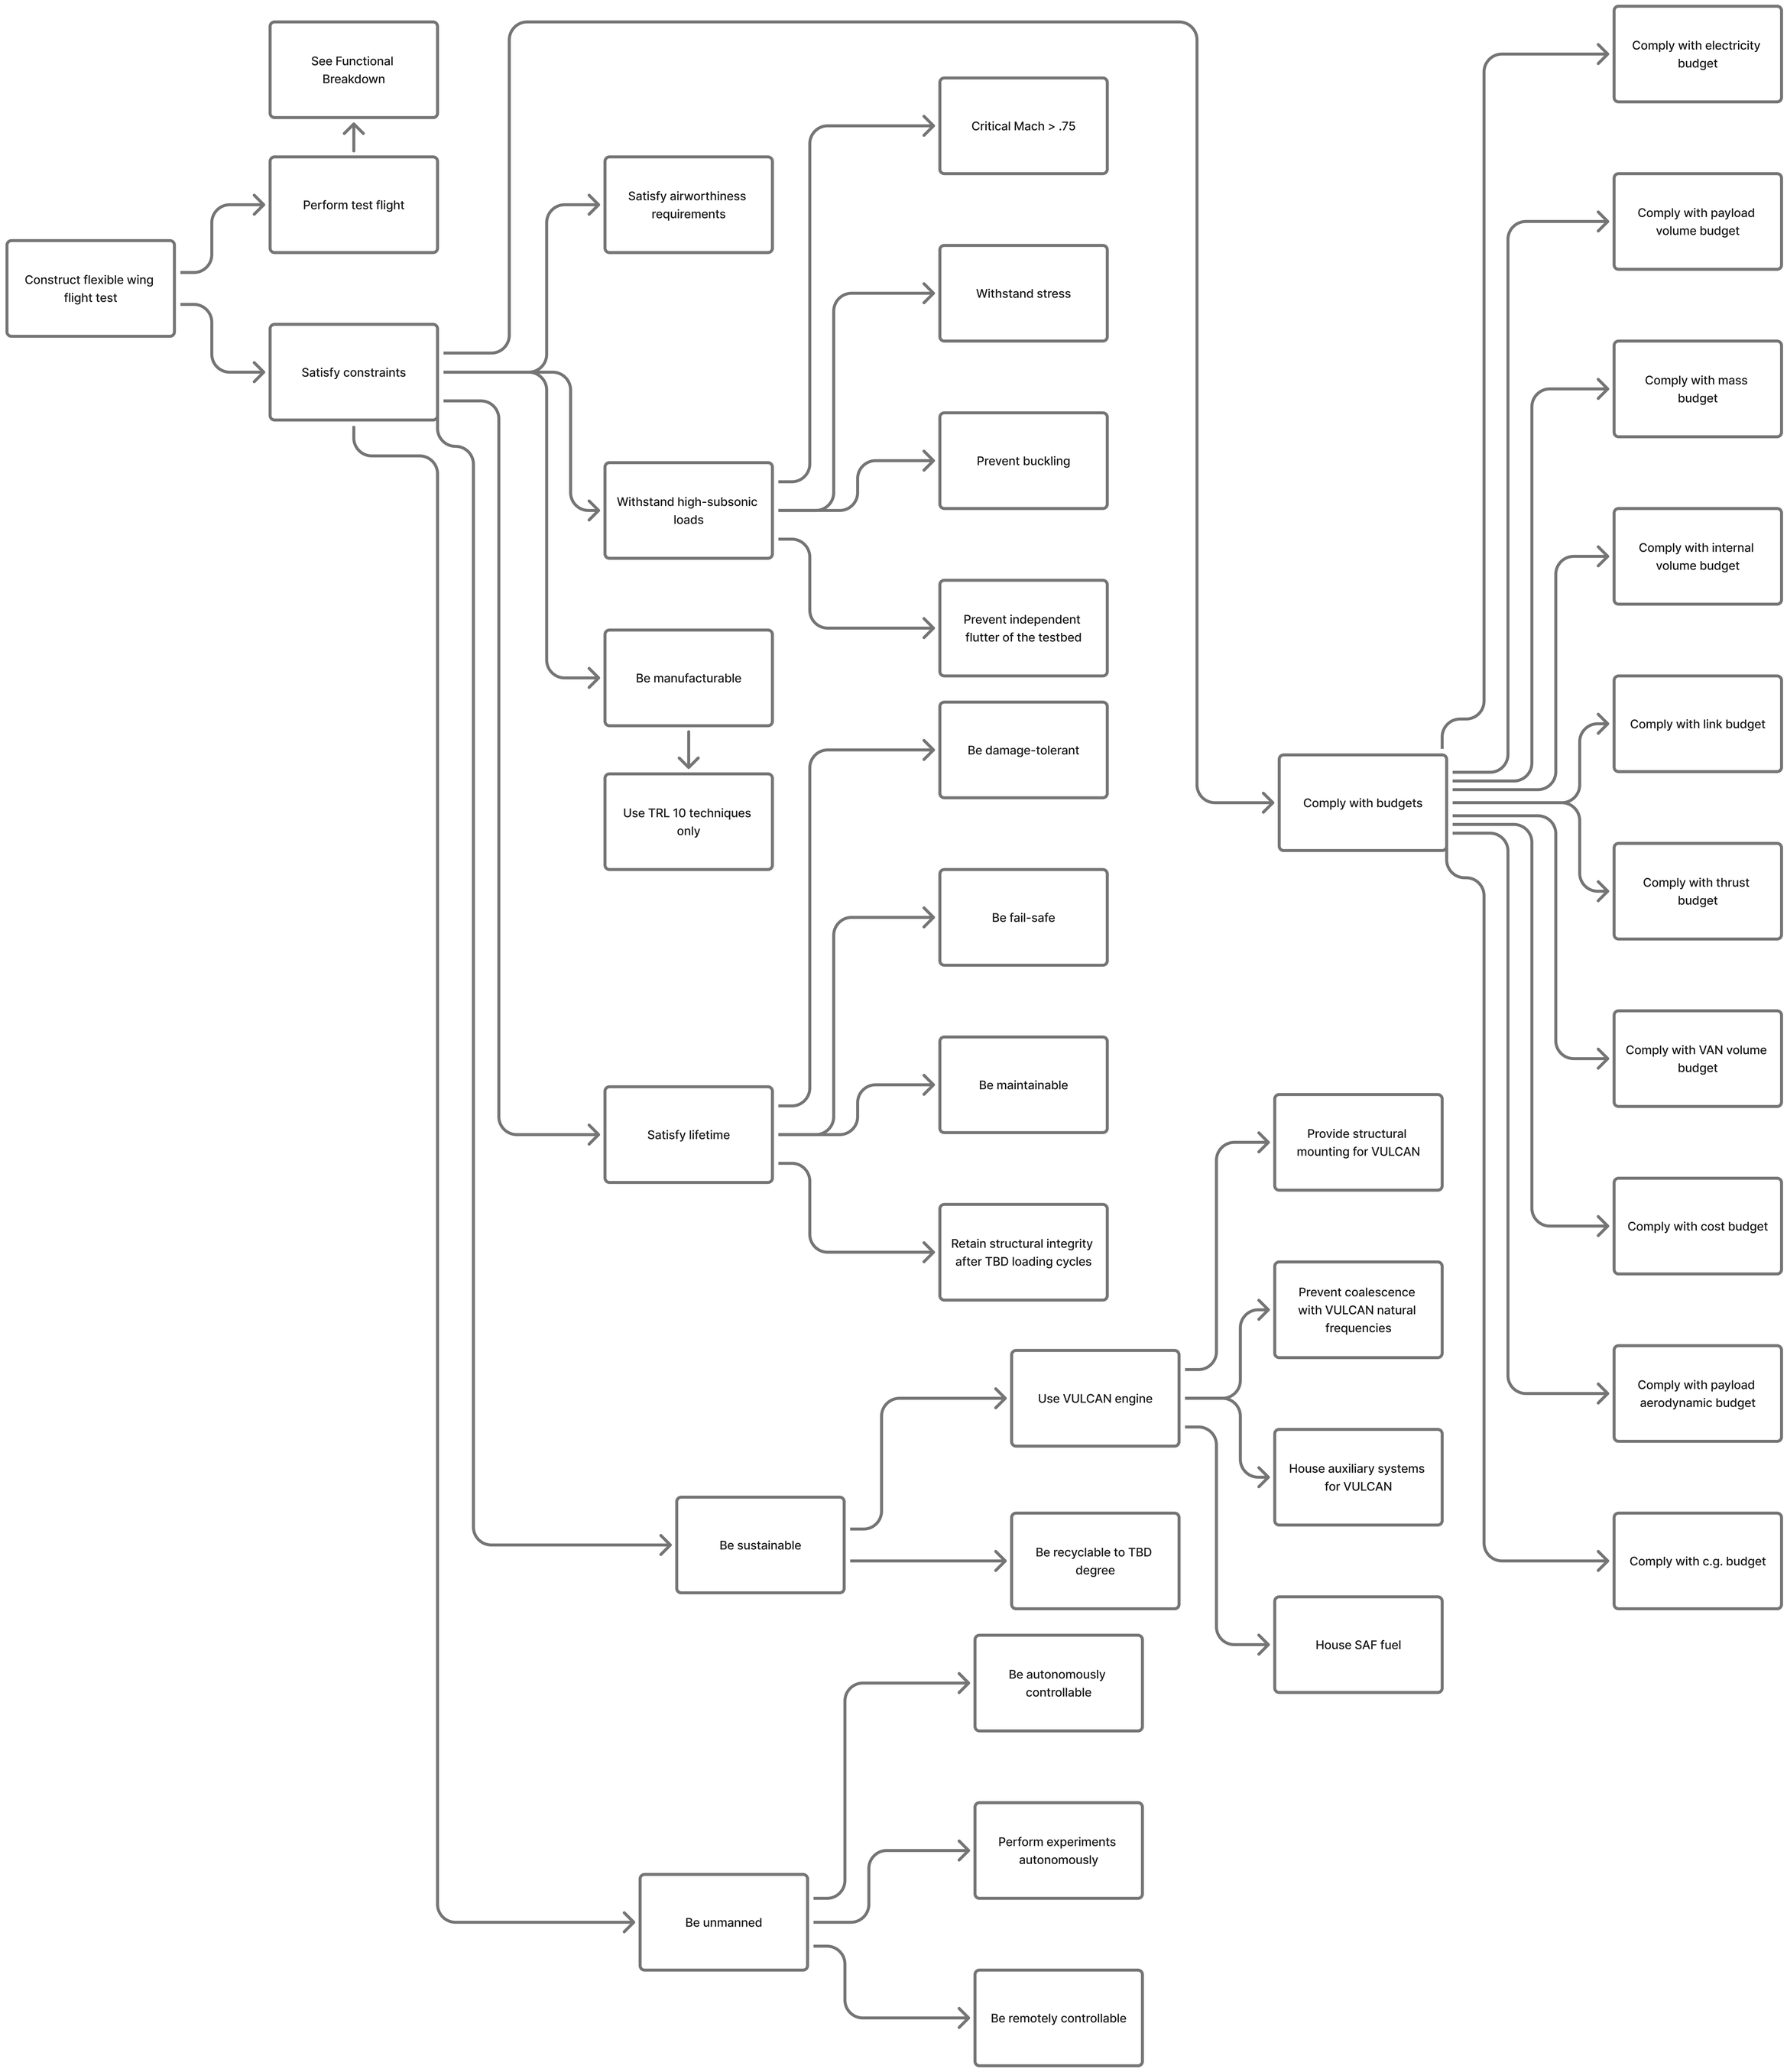
Construct flexible wing flight test
Perform test flight
See Functional Breakdown
Satisfy constraints
Satisfy airworthiness requirements
Be manufacturable
Use TRL 10 techniques only
Satisfy lifetime
Withstand high-subsonic loads
Critical Mach > .75
Withstand stress
Prevent buckling
Prevent independent flutter of the testbed
Be damage-tolerant
Be fail-safe
Be maintainable
Retain structural integrity after TBD loading cycles
Be sustainable
Use VULCAN engine
Provide structural mounting for VULCAN
Prevent coalescence with VULCAN natural frequencies
House auxiliary systems for VULCAN
House SAF fuel
Be recyclable to TBD degree
Be unmanned
Be autonomously controllable
Perform experiments autonomously
Be remotely controllable
Comply with budgets
Comply with electricity budget
Comply with payload volume budget
Comply with mass budget
Comply with internal volume budget
Comply with link budget
Comply with thrust budget
Comply with VAN volume budget
Comply with cost budget
Comply with payload aerodynamic budget
Comply with c.g. budget