
From a file to a calibrated score

threshold fixed on validation data; encoders frozen; scores are probabilities of fake

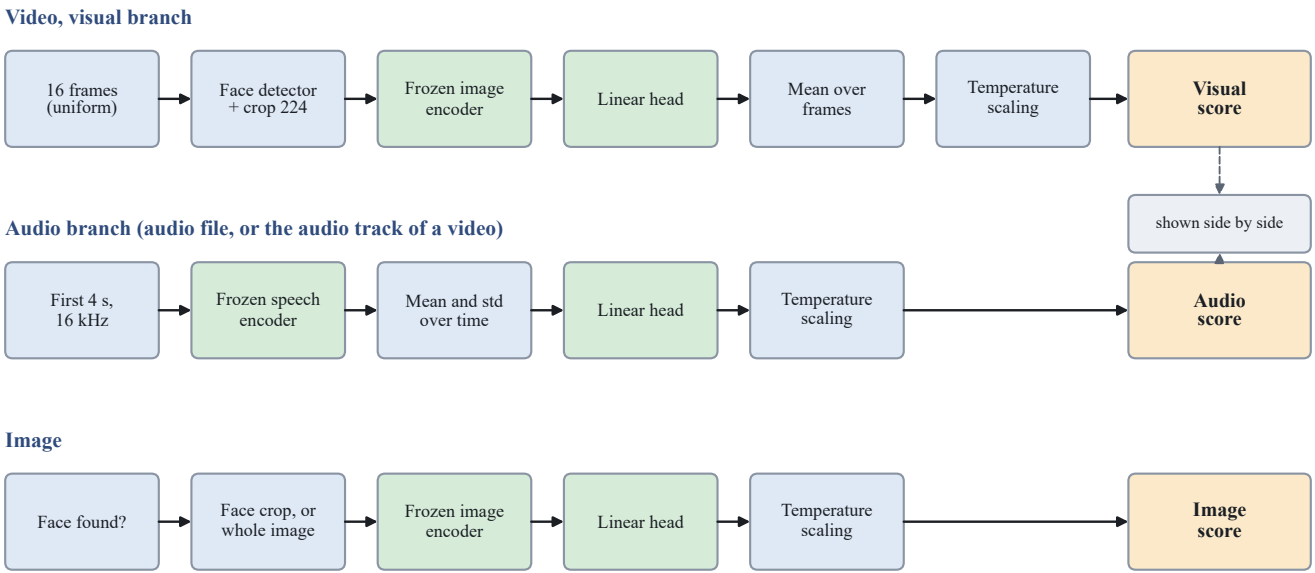

schematic