
ascolite

ASCON

TECHNICAL DATASHEET

ASCOFINE™ GROUT

Un-sanded, Ultrafine & Highly Polymerised Cementitious Grout For Tile Joints Between 1 - 4 mm

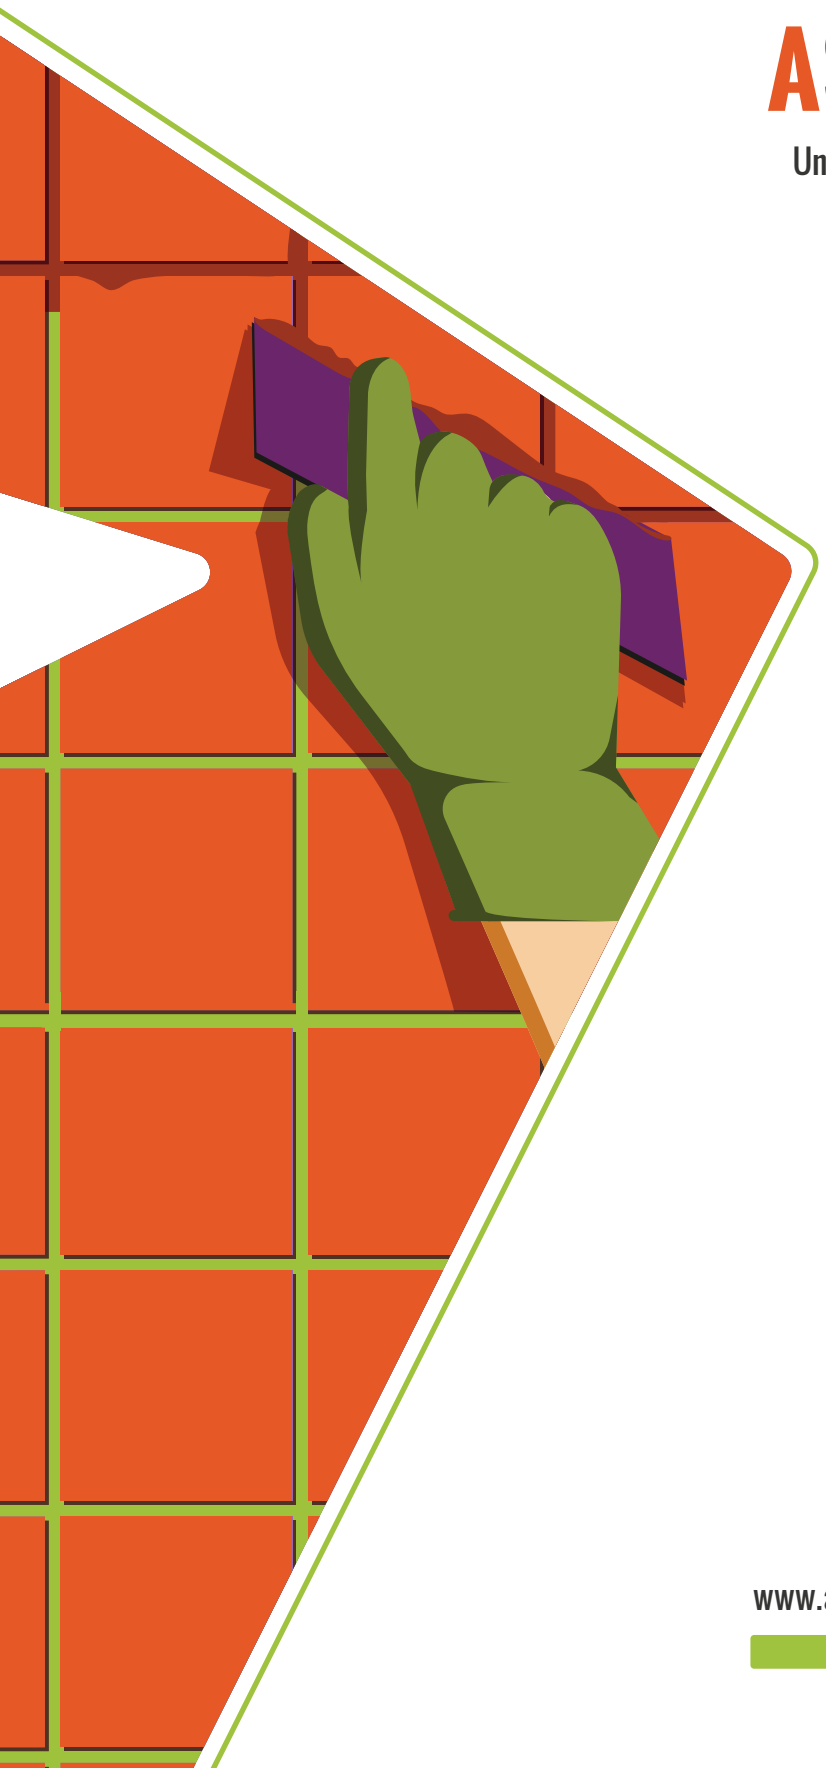

CONFORMS TO IS 17190 : 2020

CG1

★★★

COST EFFECTIVE

EASY TO USE

WATER RESISTANT



www.ascolite.in | info@ascolite.in

VERSION 3 (Apr. 2024)

FOR INQUIRY

PRODUCT DESCRIPTION

ASCOFINE GROUT is a cement-based grout enhanced with notable polymer modifications. By utilizing portland cement as its primary binder and integrating specialized additives, **ASCOFINE GROUT** attains outstanding colour accuracy, resistance to stains and non-shrink properties through controlled gas expansion, suitable for various tile grouting needs in both residential and commercial settings. This formulation is devoid of chloride and iron elements.

INDEX

KEY FEATURES 1

TECHNICAL INFORMATION 1

APPLICATION COMPATIBILITY 1

APPLICATION METHOD 1

PACKAGING 2

COVERAGE 2

SHELF LIFE 3

HEALTH & SAFETY GUIDELINES 3

TOOLS & ACCESSORIES 3

DISCLAIMER 3

Version: 03 (April 2024)

KEY FEATURES

- Easy to use
- Low-cost, multipurpose grout
- High durability
- High strength
- Chloride free
- Low VOC (Volatile Organic Compounds)
- Weather resistant
- Shock resistant
- Non staining & non shrinking
- Available in a wide range of colours

TECHNICAL INFORMATION

APPLICATION PROPERTIES

PROPERTY: TEST METHOD	TYPICAL VALUES
Appearance	Coloured fine powder
Bulk density	1100 ± 1200 km/m^3
Specific gravity	1.80 kg/ℓ
Water demand @ 27 ± 2°C	30 ± 2% (by weight)
Pot life @ 27 ± 2°C	45 ± 15 minutes
Light foot traffic @ 27 ± 2°C	24 hours
Compressive strength @ 28 days	10 ± 2 N/mm^2
Flexural strength @ 28 days	3 ± 1 N/mm^2
Pull off adhesion @ 28 days	0.5 ± 0.1 N/mm^2 @ 3 mm thickness
Water absorption @ 24 hours	0.20 mm
Grouting gap range	1 - 4 mm

APPLICATION COMPATIBILITY

AREA OF APPLICATION

Floor & walls, internal & external area, domestic application, commercial application and wider tile joints.

SUITABLE SUBSTRATE

Ceramic tiles, glazed tiles, porcelain tiles, vitrified tiles, natural stones, glass mosaics and marble.


APPLICATION METHOD

SURFACE PREPARATION


- Ensure 24-hour interval for grouting after tile fixing. Before initiating the grouting process, ensure that the tiles or stones are securely positioned and the adhesive bed is thoroughly dry.
- Before grouting, remove any spacers that may have been used.
- Ensure that grout joints are free from standing water, dirt, dust and any foreign substances.
- Lightly sponge the tile surface to eliminate dust and dirt.
- Remove any excess adhesive or mortar from the joint area.
- Refrain from using acid cleaners for tile or stone cleaning, instead, wash the joints with water or detergent.
- Verify that the joints are completely dry before commencing the grouting process.
- Substrate temperature must be between 16°C to 35°C.

Version: 03 (April 2024)

MIXING



- Pour approximately 300 ml to 350 ml of clean water per kilogram of **ASCOFINE GROUT** into a bucket.
- Mix thoroughly by hand or with a slow-speed mixer (<300 RPM).



- Allow the mixture to slake for 2 – 5 minutes and remix.
- Avoid entraining air by mixing at a very high speed or by over-mixing.



- Make sure that uniform colour and a lumps-free consistency is achieved
- Gradually sprinkle the **ASCOFINE GROUT** powder into the water while stirring continuously until a thick, creamy toothpaste-like consistency is obtained, ensuring there are no lumps.

APPLICATION




- Utilize a grout float or rubber squeegee to firmly compact the mixed grout into the joints, ensuring complete filling.
- Maintain the float perpendicular to the surface and pull it diagonally at a 45° angle across the joints and tiles to prevent material displacement.
- Work in small sections to remove excess grout from the tile surface, ensuring not to exceed the grout's working time.
- Allow approximately 15 minutes for the grout to dry. Using a damp sponge, diagonally clean the tile/stone surface toward the joint lines.
- Finally, rinse thoroughly with clean water and a sponge to eliminate any dried grout residue from the tile/stone surface.
- Once the grout has adequately set within the joints, polish the tile/stone surface with a clean cloth. Alternatively, perform a final rinse with clean water using a dampened sponge
- The ideal temperature for application is between +10°C to +40°C.

POST-APPLICATION PROCEDURES




- Remove excess grout from tiles carefully, within 10 – 40 minutes (considering the ambient temperature) without disturbing the joints.



- Allow the grout to firm up before cleaning with a wet sponge or cloth.
- Utilize a scrubber for rustic & matt finish tiles or a sponge/clean cloth for smooth tiles, dampened with clean water to scrub the tile surface in a circular motion diagonally to the grout lines in both clockwise and anti-clockwise directions.
- Gently finish the filled grout with a grout finishing tool or gloved finger along the line of grout.
- After 12 – 24 hours, clean the tile surface with water and soap solution to eliminate any remaining stains.
- Clean tools and containers with clean water while the grout is still in its fresh state.

PACKAGING



- 1 & 5 kg

COVERAGE

$$\frac{(\mathbf{L}+\mathbf{B})\mathbf{x}\ \mathbf{W}\ \mathbf{x}\ \mathbf{D}\ \mathbf{x}\ \mathbf{S.G.}}{\mathbf{L}\ \mathbf{x}\ \mathbf{B}} = \mathbf{kg/m^2}$$

L = Length of tile (mm) **B** = Breadth of tile (mm)

W = Width of joint (mm) **D** = Depth of joint (mm)

S.G. = Specific gravity of the grout

Version: 03 (April 2024)

SHELF LIFE

ASCOFINE GROUT, when unopened, can be stored above floor level in a cool dry place for a duration of up to 24 months.



HEALTH & SAFETY GUIDELINES



- Take preventive measures to keep children away from this product.
- Wear appropriate safety gear, such as gloves and face or eye protection during the installation.
- If the adhesive comes in contact with your eyes or skin, immediately rinse them well with lots of clean water and seek medical advice.
- Only qualified professional applicators or contractors may use this product.
- For additional information, please consult the relevant material safety data sheet, which is available upon request.

TOOLS & ACCESSORIES

GROUTING TOOLS



BUCKET



MIXER



GROUT SPREADER



SPONGE



PUTTY KNIFE



AIR BLOWER



MASKING TAPE



RUBBER SQUEEGEE

DISCLAIMER:

This technical data sheet supersedes all previous versions from the immediate effect. The company guarantees its products against any manufacturing defects. The user should determine the product's usability for its intended use. Since the company has no control over site conditions and the installation procedures, the company would not be responsible under any circumstances for any loss, damage or liability from incorrect usage. For the products on which the company is offering a warranty, please refer to the warranty document to know the entire terms and conditions. The same can be availed on request or from the company website. All orders are accepted subject to our prevailing terms of sales and delivery. While the technical details & recommendations contained in this document and the related details given by the representatives of the company correspond to the best of our knowledge & experience, all the above information must in any case be considered as merely indicative and subject to confirmation. Our company maintains an active research and development policy, allowing us to continuously enhance our products. As a result, we reserve the right to revise this information at any time without prior notice. For optimal results, we recommend this product be installed by a qualified professional. By using this product, users acknowledge and agree to the terms and conditions outlined in this disclaimer.