



FATE MONTHLY REPORT

Doc.No : FATE-001
Version : 1.0
Date : 05-11-2024



FORECAST SYSTEM FOR ATMOSPHERE AND TURBULENCE at the VERY LARGE TELESCOPE

Performance assessment
October 2024



PO102958/ESO/20/95952/FLAB

Contents

1	Introduction	3
2	NIGHT1: Statistical analysis of forecast performances	6
2.1	NIGHT1: Scatter plots (bias, RMSE, SD) for long and short forecast time scale	7
2.2	NIGHT1: Summarizing values of bias, RMSE, SD for long and short forecast time scales	11
2.3	NIGHT1: Probability of detection (PODi) for long and short forecast time scales	12
3	DAY1: Statistical analysis of forecast performances related	15
3.1	DAY1: Scatter plots (bias, RMSE, SD) for long and short forecast time scale	16
3.2	DAY1: Summarizing values of bias, RMSE, SD for long and short forecast time scales	18
3.3	DAY1: Probability of detection (PODi) for long and short forecast time scales	19
4	NIGHT2: Statistical analysis of forecast performances	21
4.1	NIGHT2: Scatter plots (bias, RMSE, SD) for long and short forecast time scale	22
4.2	NIGHT2: Summarizing values of bias, RMSE, SD for long and short forecast time scales	26
4.3	NIGHT2: Probability of detection (PODi) for long and short forecast time scale	27
5	DAY2: Statistical analysis of forecast performances	30
5.1	DAY2: Scatter plots (bias, RMSE, SD) for long and short forecast time scale	31
5.2	DAY2: Summarizing values of bias, RMSE, SD for long and short forecast time scales	33
5.3	DAY2: Probability of detection (PODi) for long and short forecast time scales	34
6	NIGHT3: Statistical analysis of forecast performances	36
6.1	NIGHT3: Scatter plots (bias, RMSE, SD) for long and short forecast time scale	37
6.2	NIGHT3: Summarizing values of bias, RMSE, SD for long and short forecast time scales	41
6.3	NIGHT3: Probability of detection (PODi) for long and short forecast time scale	42
7	DAY3: Statistical analysis of forecast performances	45
7.1	DAY3: Scatter plots (bias, RMSE, SD) for long and short forecast time scale	46
7.2	DAY3: Summarizing values of bias, RMSE, SD for long and short forecast time scales	48
7.3	DAY3: Probability of detection (PODi) for long and short forecast time scales	49
8	WP Statistical analysis of the forecast system failures and ESO observation availability	51

1 Introduction

The automatic Report has the goal to provide to ESO the performances assessment of the FATE project i.e. a picture of the characteristics of the forecasts delivered to ESO in operational configuration in the context of the FATE project. The report is supposed to be delivered to ESO with a monthly frequency. In agreement with ESO it has been decided to include in the report model performances following specific figures of merit as well as the success rate experienced by FATE, ESO or ECMWF during the process of forecast production and delivery. The three institutes represent the nodes of the automatic system. The figures of merit used to quantify the forecasts performances have been identified in agreement with ESO. Forecasts products delivered to ESO follow contractual specifications (SoW) and contract documentation.

For the night time FATE is supposed to provide forecasts related to 8 parameters: wind speed (WS at 30 m above the ground) and direction (WD at 30 m above the ground), relative humidity (RH at 30 m above the ground), precipitable water vapour (PWV), seeing (ε), wavefront coherence time (τ_0), ground layer fraction (GLF), sky transparency.

For the day time, FATE is supposed to provide forecasts related to 5 parameters: wind speed (WS at 30 m above the ground) and direction (WD at 30 m above the ground), relative humidity (RH at 30 m above the ground), precipitable water vapour (PWV), sky transparency.

The sky transparency forecast is provided with the operational General Circulation Model of ECMWF at high resolution (HRES). For all the other parameters FATE is supposed to provide forecasts at long time scale and at short time scale obtained with the Meso-Nh model and Astro-Meso-Nh model. The latter is the package for the optical turbulence i.e. C_N^2 and all integrated parameters depending on the C_N^2 . FATE allows different forecast time scales (FTS). Forecasts at short time scale are calculated using an autoregression approach (called AR hereafter) proposed in [1] and applied to the case of VLT [2]. The AR implies that, at each full time hour, when real-time observations start to be available FATE provides the forecasts for the coming 4h of all the three astroclimatic parameters (ε , τ_0 and GLF) plus the forecasts of four atmospheric parameters (WS, WD, RH and PWV). In other words, the forecasts are updated at each full time hour in the night and day time provided the conditions for the calculation are respected¹. We refer the reader to the paper [2] for the model configuration, the definition of parameters and the explanation of the AR method. Forecasts at long time scales are calculated with a time scale of 1 night, 2 nights, 3 nights as well as for 1 day, 2 days, 3 days and results are delivered 2 hours before sunset (for night time) and 2 hours before sunrise (for day time) following the configuration described in the document [4] located in the dedicated ESO repository². For the short time scales, in agreement with ESO, the report shows results related to the FTS at 1h that is the time scale more relevant for ESO for the VLT science operation.

Analysis of forecast performances is done using two different approaches:

- calculation of bias, RMSE and σ applied to the scatter plots between observations and forecasts. In [2] are reported definitions as well as the description of how data are treated.
- calculation of contingency tables (3×3 for all the parameters with exception of WD treated with a 4×4 table) and derived parameters: percentage of corrected forecasts (PC), extremely bad forecasts (EBD), probability of detection (POD_{1,2,3}). See [2]-Appendix and [5] for the definition and for an extended digression on these parameters.

Temporal frequency of sampling for observations and forecasts, in the standard configuration as well as in the AR case, is 10 minutes as requested by the ESO technical specifications.

¹We refer the reader to [3] for the these technicalities

²https://drive.google.com/drive/u/0/folders/1fa5r9EK8pfK1f18dFGxUmW_46OUyodIW. The repository is not public. Angel Otarola and Steffen Mieske are the ESO contact point for the FATE project and can access the repository.

LEGENDA

- **Standard configuration:** we mean with that those forecasts at long time scales (1 night/day, 2 nights/days, 3 nights/days) performed only with an atmospheric model having a forecast time scale (FTS) of [23h-33h], [47h-57h] and [71h-81h] respectively. Model configuration for the case 1 night is described in detail in [2] and [4]. Extrapolation to the other cases (2 nights/days and 3 nights/days) is reported in [4].

- **AR:** we mean with that the auto-regression method ([1, 2]). Such a method is a hybrid method taking into account the forecasts performed with the atmospheric model plus the real-time observations related to a finite number of nights in the close past. In [1] it has been proven that the optimal number of nights in the past is $N+5$. Both terms (observations and forecasts from the atmospheric model) are treated with a statistical algorithm, more precisely an auto-regression algorithm [1]. The method has been already applied in the forecast of the PWV at short time scale at VLT [6].

In the report data analysis is reported using the following logic. Each chapter of the report treats the cases: 1 night/day, 2 nights/days, 3 nights/days. In the case of 1 night/day the long FTS (standard configuration) as well as the short FTS (AR) are treated while, in the cases 2 nights/days and 3 nights/days, only the long FTS (standard configuration) is treated. Each main chapter has three sub-sections:

- The first sub-section (ex: 2.1) reports, for all the parameters, the scatter plots of the standard configuration, the AR at a time scale of 1h and the prediction by persistence a time scale of 1h. For the case of seeing, we considered observations only $< 1.5''$. This is because it is known that performances with the standard configuration decrease as soon as the value of the parameters increases. Due to the fact that AO can hardly be used for $\varepsilon > 1.5''$ it is considered useless (or weakly interesting) to analyse performances for seeing $> 1.5''$. Definition of the prediction by persistence is given in [7]. In synthesis, it assumes that the value of the parameter P at a time t (i.e. $P(t)$) for whatever $t > t_0$ is equal to the mean of P calculated in the 10 minutes before t_0 .
- In the second sub-section (ex: 2.2), values of bias, RMSE and σ are reported in tables of synthesis. To facilitate the analysis, tables show the statistics obtained in the last month as well as the statistics obtained since the beginning of the operational phase (this case is called 'incremental month'). The latter is obviously more representative from a statistical point of view and we expect that the latter case should approach the statistics obtained on a long time scale (12 months i.e. a whole solar year) in the context of a research approach [2]. The statistics performed on a time scale of the current month is less representative in statistical terms and it is possible to observe some fluctuations from one month to the other. This has been verified in the commissioning.
- The third sub-section (ex: 2.3) reports the following statistical operators values (PC, EBD, $POD_{1,2,3}$) retrieved from the contingency tables calculated for each atmospheric and astroclimatic parameter. In this section, as well as in the Annex, we take into consideration the 'incremental month' approach that means that we take into account data starting from the beginning of the operational phase up to the last month. For each parameters we used, as thresholds of the contingency tables, the first and second tertiles calculated off-line on a climatological time scale, more precisely on a time scale of 1 solar year [1/8/2018-31/7/2019] (the period used in the paper [2]). Values of first and second tertiles for all the paramaters are reported in the documented [8]. The WD is the unique parameter that requires a 4×4 table. In that case the thresholds selected have been the directions: $[45^\circ-225^\circ]$ and $[135^\circ-315^\circ]$ identifying the sectors: North (N), East (E), South (S) and West (W) (see [5] Fig.3). In the day time case we introduced a correction on the thresholds [8] derived from an analysis carried out during the commissioning. In the calculation of the contingency tables, for the astroclimatic parameters case, (i.e. those parameters depending on the C_N^2), two different options are taken into account:

(A) the simple and classical contingency table in which are reported the number of couples (observation, forecast) falling in the each box. In that case the reference is given by observations provided by the an instrument or another one depending on the parameter. See [2] for details. In synthesis: the DIMM for the seeing, the MASS-DIMM for τ_0 and GLF.

(B) a modified contingency tables in which the coincidence in the main diagonal is done taking into account a realistic accuracy for the estimate of the individual parameter. The accuracy is estimated with the σ calculated between instruments measuring the same parameter at the same time. We refer the reader to [2] for an extended discussion on that topic. The uncertainties (or accuracies) have been calculated on a very rich statistical samples of observations. The FATE forecasts of astrophysical parameters are supposed to be used for the Service Mode and science operations of the whole VLT i.e. the four UTs as well as the VLTI therefore we are interested on the whole plateau of Cerro Paranal. That means that is indeed poorly representative an estimate that does not take into account an accuracy/uncertainty.

For the atmospheric parameters we used only case (A). In other words we assume an uncertainty that is approximated to zero. We have no elements at present that let us think that, also for the those parameters, an uncertainty different from zero might be relevant.

Contingency tables are reported in an Annex that is delivered to ESO too, jointly with the Report, on a monthly time scale.

NOTE

*At the end of the commissioning [2023/09/01 - 2023/12/31] we discovered an effect (that we call hereafter "border effect") that degrades performances of forecasts in AR configuration. The bad news is that performances of the AR mode appear therefore less good than what it has been estimated in [2] even if the substantial improvement with respect to the standard configuration is evident. The good news is that we identified during the commissioning the cause of this effect. The main priority of the R&D activity of the FATE project will be therefore focused on looking for a solution to this problem in order to improve these results. An explanation of this effect and an explanation of the causes of this effect is reported in [3]. To simplify the understanding we call "post-processing" the data analysis performed in post-processing as in [2], we call "real-time" the data analysis performed using the outputs *.csv delivered to ESO. In this report we show, at present, results obtained with the "post-processing" case. Differences between the two cases are indicated in [7].*

2 NIGHT1: Statistical analysis of forecast performances

2.1 NIGHT1: Scatter plots (bias, RMSE, SD) for long and short forecast time scale

Figures in setion 2.1 are included in the range: 1-7.

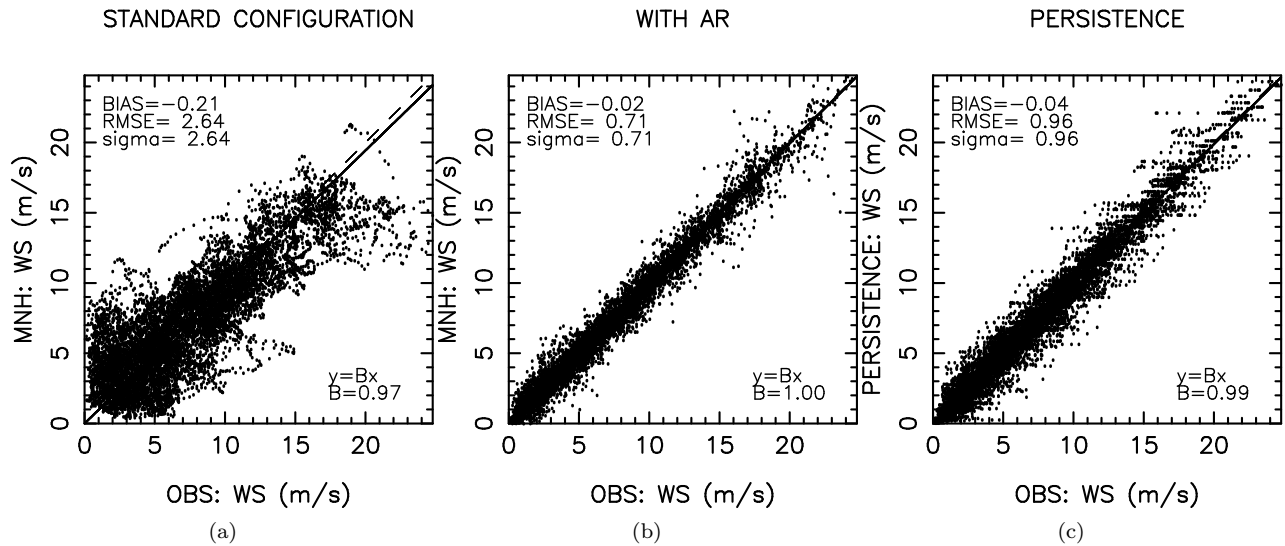


Figure 1: night1 - wind speed (ms^{-1}): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

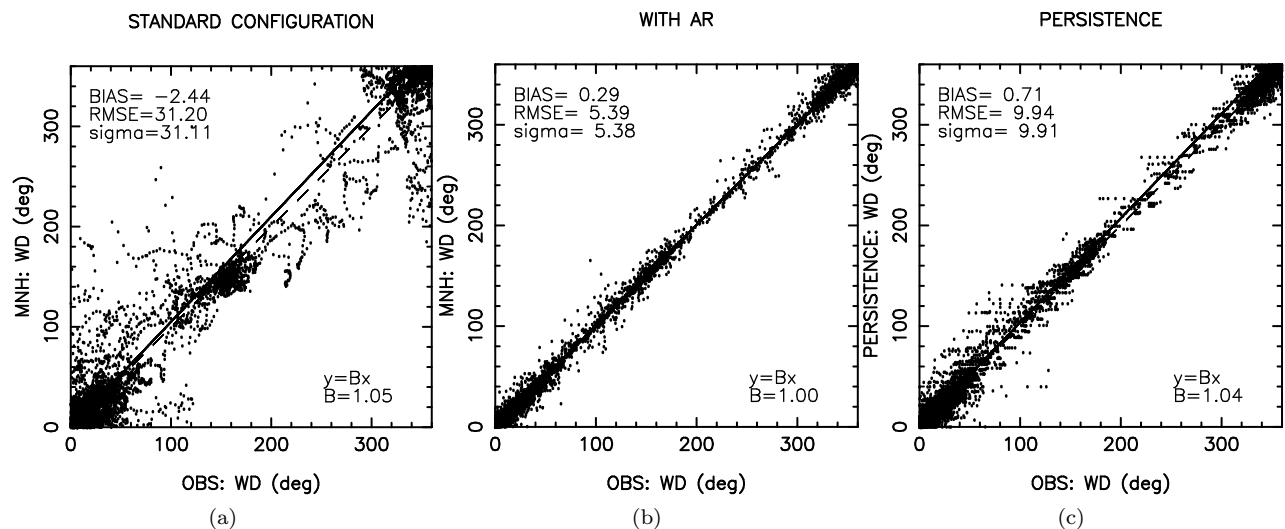


Figure 2: night1 - wind direction (degree): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

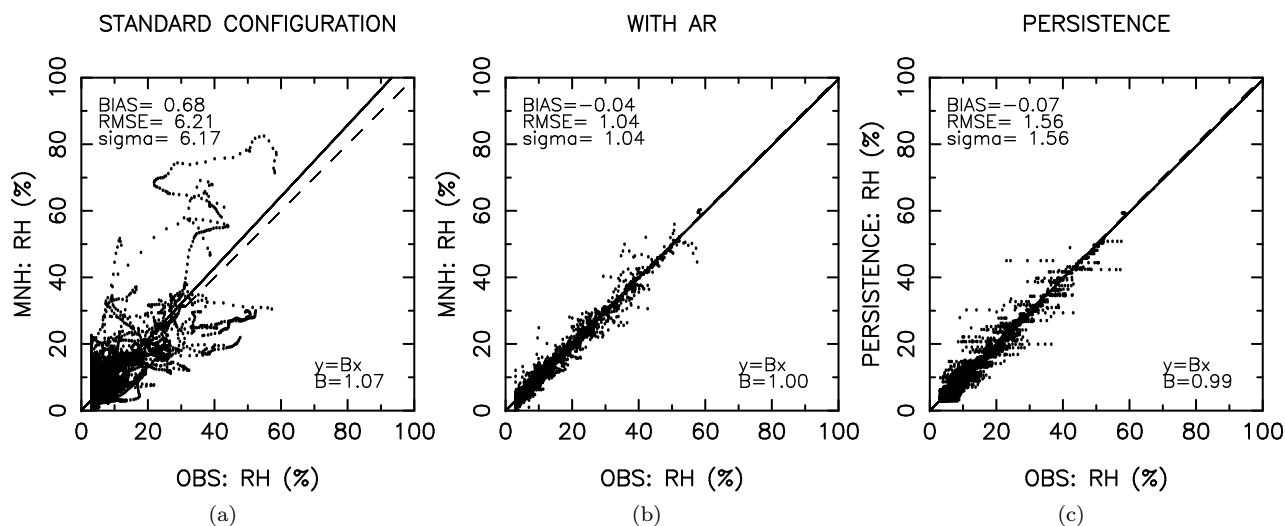


Figure 3: night1 - relative humidity (percent): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

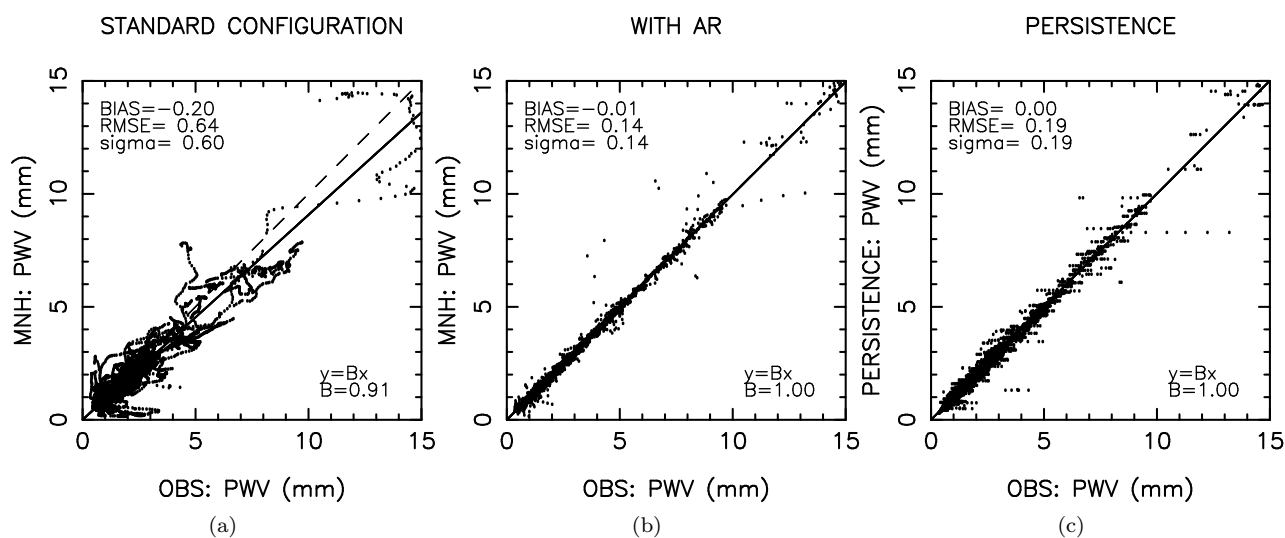


Figure 4: night1 - precipitable water vapor (mm): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

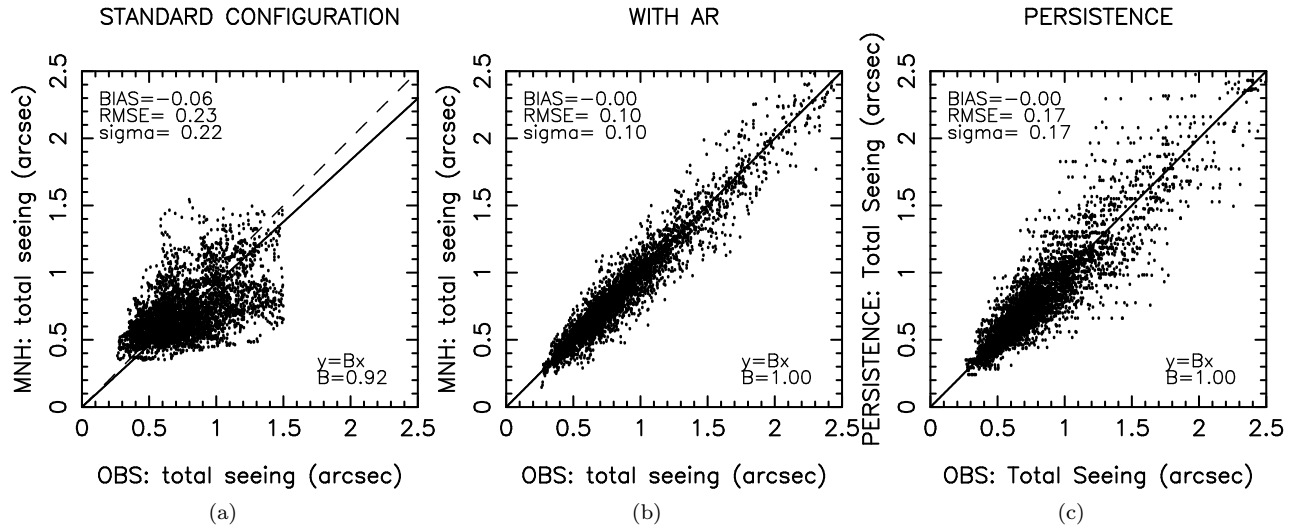


Figure 5: night1 - total seeing (arcsec): (a) STANDARD CONFIGURATION ($< 1.5''$), (b) WITH AR (1H), (c) PERSISTENCE (1H)

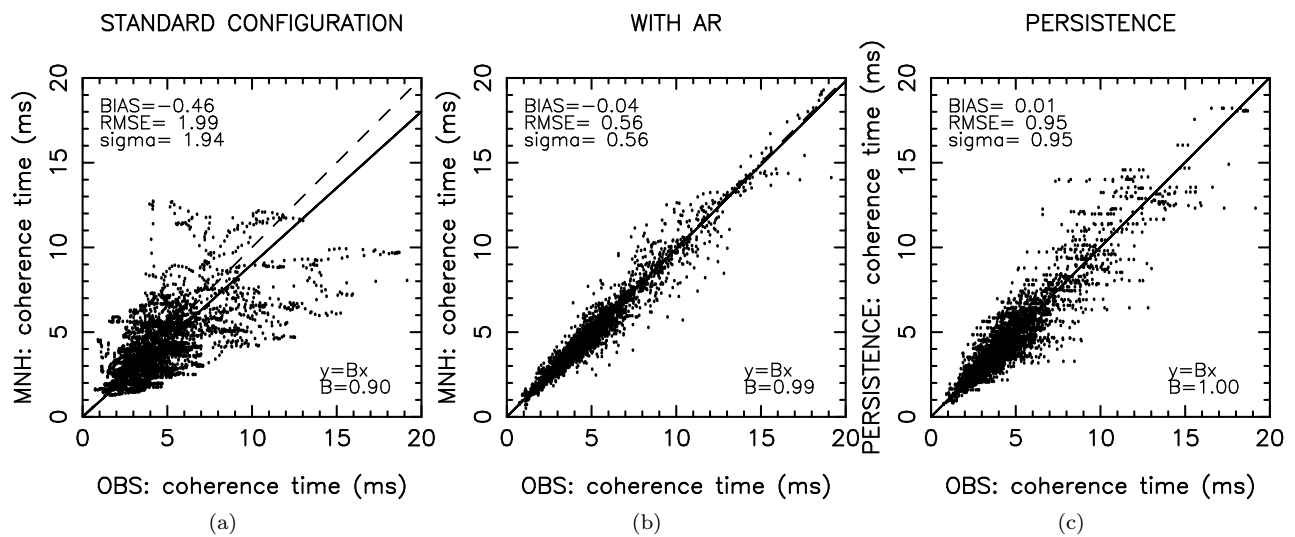


Figure 6: night1 - wavefront coherence time (ms): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

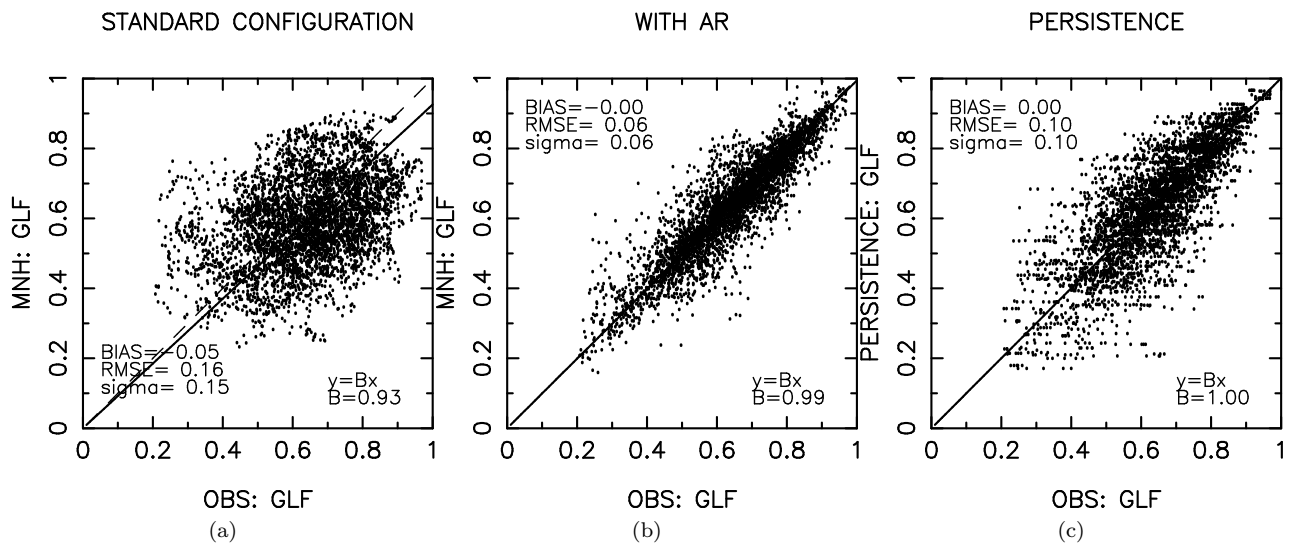


Figure 7: night1 - ground layer fraction (dimensionless): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

2.2 NIGHT1: Summarizing values of bias, RMSE, SD for long and short forecast time scales

Tables in section 2.2 are included in the range: 1-3.

VARIABLE	BIAS (inc. month)	RMSE (inc. month)	SD (inc. month)	BIAS (last month)	RMSE (last month)	SD (last month)
WS ($m \cdot s^{-1}$)	-0.21	2.64	2.64	0.49	2.79	2.75
WD (degree)	-2.44	31.20	31.11	4.97	31.65	31.26
RH (percent)	0.68	6.21	6.17	2.51	7.72	7.30
PWV (mm)	-0.20	0.64	0.60	0.01	0.82	0.82
SEE (arcsec)	-0.06	0.23	0.22	0.00	0.21	0.21
TAU (ms)	-0.46	1.99	1.94	-0.81	2.36	2.22
GLF (dimensionless)	-0.05	0.16	0.15	-0.05	0.15	0.14

Table 1: night1 - Statistics for variables in standard configuration: incremental month (i.e., since the beginning of service) *vs* last month (October-2024)

VARIABLE	BIAS AR (1H)	RMSE AR (1H)	SD AR (1H)		RMSE persistence (1H)	SD persistence (1H)
WS ($m \cdot s^{-1}$)	0.03	0.75	0.75		1.02	1.01
WD (degree)	0.38	5.53	5.52		11.18	11.07
RH (percent)	0.05	1.45	1.45		1.80	1.80
PWV (mm)	0.01	0.29	0.29		0.35	0.35
SEE (arcsec)	0.00	0.09	0.09		0.14	0.13
TAU (ms)	-0.09	0.65	0.64		1.12	1.12
GLF (dimensionless)	-0.01	0.07	0.07		0.11	0.11

Table 2: night1 - Last month (October-2024): statistics for variables with AR (1H) *vs* persistence (1H)

VARIABLE	BIAS AR (1H)	RMSE AR (1H)	SD AR (1H)		RMSE persistence (1H)	SD persistence (1H)
WS ($m \cdot s^{-1}$)	-0.02	0.71	0.71		0.96	0.96
WD (degree)	0.29	5.39	5.38		9.94	9.91
RH (percent)	-0.04	1.04	1.04		1.56	1.56
PWV (mm)	-0.01	0.14	0.14		0.19	0.19
SEE (arcsec)	-0.00	0.10	0.10		0.17	0.17
TAU (ms)	-0.04	0.56	0.56		0.95	0.95
GLF (dimensionless)	-0.00	0.06	0.06		0.10	0.10

Table 3: night1 - Incremental month (i.e., since the beginning of service): statistics for variables with AR (1H) *vs* persistence (1H)

2.3 NIGHT1: Probability of detection (PODi) for long and short forecast time scales

Tables in section 2.3 are included in the range: 4-15.

PARAMETER	STANDARD	WITH AR (1H)
POD1	56.5	92.6
POD2	49.8	88.6
POD3	82.9	95.7
PC	66.5	92.9
EBD	2.7	0.0

Table 4: night1 - PODs for wind speed (ms^{-1})

PARAMETER	STANDARD	WITH AR (1H)
POD1	97.7	98.9
POD2	63.7	87.2
POD3	5.1	85.7
PC	90.1	96.8
EBD	0.2	0.0

Table 5: night1 - PODs for wind speed (ms^{-1}) and thresholds (12.0,18.0) ms^{-1}

FATE - Monthly Report

PARAMETER	STANDARD	WITH AR (1H)
POD1	91.0	98.8
POD2	50.8	90.2
POD3	94.2	96.5
POD4	36.4	90.9
PC	85.2	97.4
EBD	1.0	0.0

Table 6: night1 - PODs for wind direction (degree)

PARAMETER	STANDARD	WITH AR (1H)
POD1	67.5	95.5
POD2	57.7	93.1
POD3	82.3	97.6
PC	66.2	95.0
EBD	1.4	0.0

Table 7: night1 - PODs for relative humidity (percent)

PARAMETER	STANDARD	WITH AR (1H)
POD1	98.9	100.0
POD2	0.0	84.6
POD3	NaN	NaN
PC	98.5	99.9
EBD	0.2	0.0

Table 8: night1 - PODs for relative humidity (percent) and thresholds (50,70) percent

PARAMETER	STANDARD	WITH AR (1H)
POD1	94.0	98.7
POD2	62.8	95.9
POD3	84.8	98.6
PC	84.1	97.9
EBD	0.1	0.0

Table 9: night1 - PODs for precipitable water vapor (mm)

PARAMETER	STANDARD	WITH AR (1H)
POD1	56.8	89.3
POD2	41.1	75.2
POD3	44.0	92.7
PC	46.6	85.8
EBD	6.4	0.1

Table 10: night1 - PODs for total seeing (arcsec) and accuray 0.0

FATE - Monthly Report

PARAMETER	STANDARD	WITH AR (1H)
POD1	96.1	99.9
POD2	96.8	99.5
POD3	82.8	99.6
PC	94.3	99.7
EBD	4.6	0.1

Table 11: night1 - PODs for total seeing (arcsec) and accuray 0.24

PARAMETER	STANDARD	WITH AR (1H)
POD1	75.0	94.3
POD2	52.9	87.4
POD3	54.7	87.2
PC	60.8	89.7
EBD	1.5	0.0

Table 12: night1 - PODs for wavefront coherence time (ms) and accuray 0.0

PARAMETER	STANDARD	WITH AR (1H)
POD1	93.6	100.0
POD2	88.4	99.7
POD3	67.5	97.5
PC	88.5	99.6
EBD	4.6	0.3

Table 13: night1 - PODs for wavefront coherence time (ms) and accuray 1.22

PARAMETER	STANDARD	WITH AR (1H)
POD1	55.2	84.8
POD2	39.3	74.0
POD3	26.4	83.4
PC	39.4	80.1
EBD	9.6	0.3

Table 14: night1 - PODs for ground layer fraction (dimensionless) and accuray 0.0

PARAMETER	STANDARD	WITH AR (1H)
POD1	92.6	99.2
POD2	91.9	99.1
POD3	58.9	99.3
PC	86.0	99.3
EBD	10.6	0.3

Table 15: night1 - PODs for ground layer fraction (dimensionless) and accuray 0.14

3 DAY1: Statistical analysis of forecast performances related

3.1 DAY1: Scatter plots (bias, RMSE, SD) for long and short forecast time scale

Figures in section 3.1 are included in the range: 8-11.

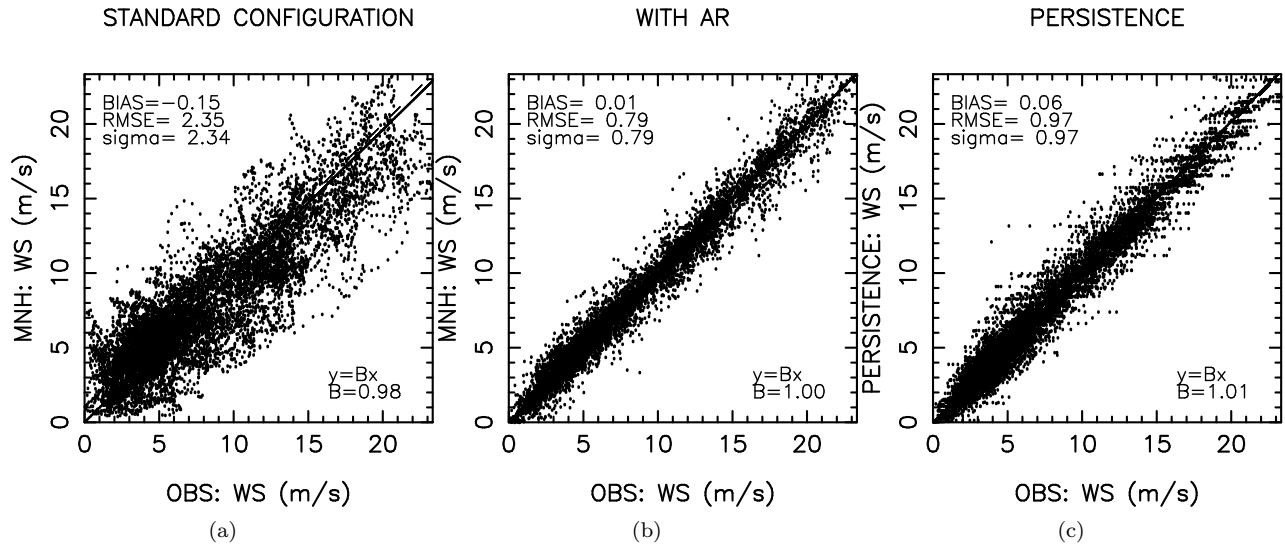


Figure 8: day1 - wind speed (ms^{-1}): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

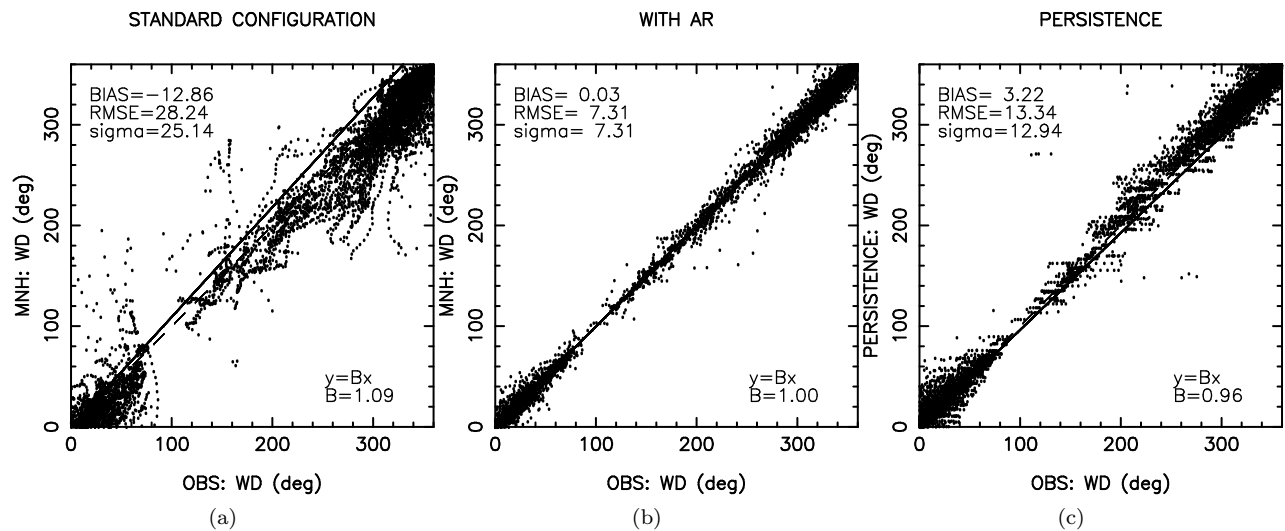


Figure 9: day1 - wind direction (degree): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

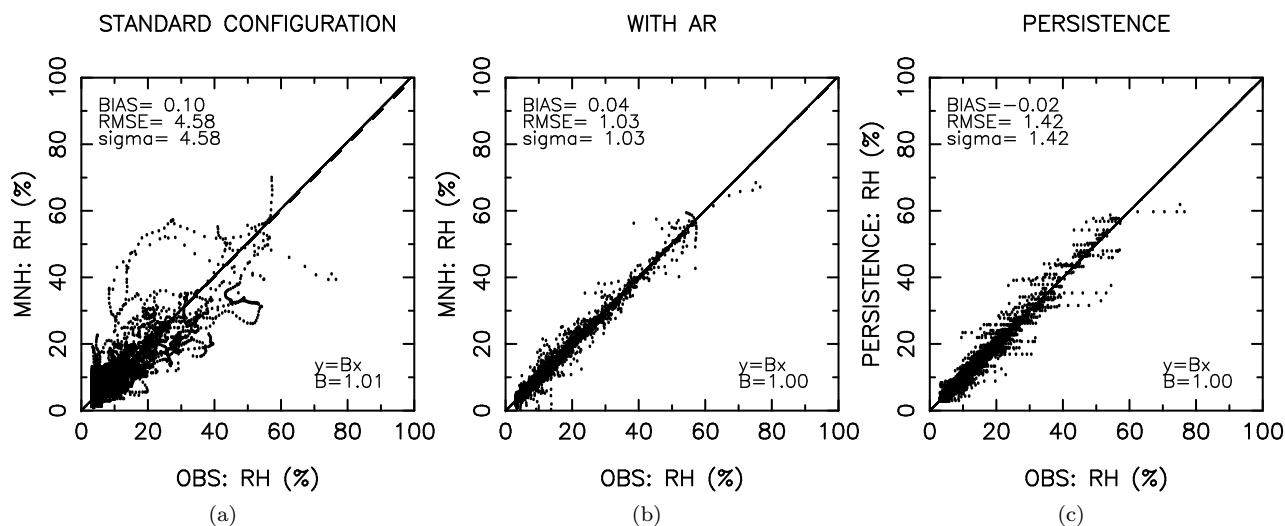


Figure 10: day1 - relative humidity (percent): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

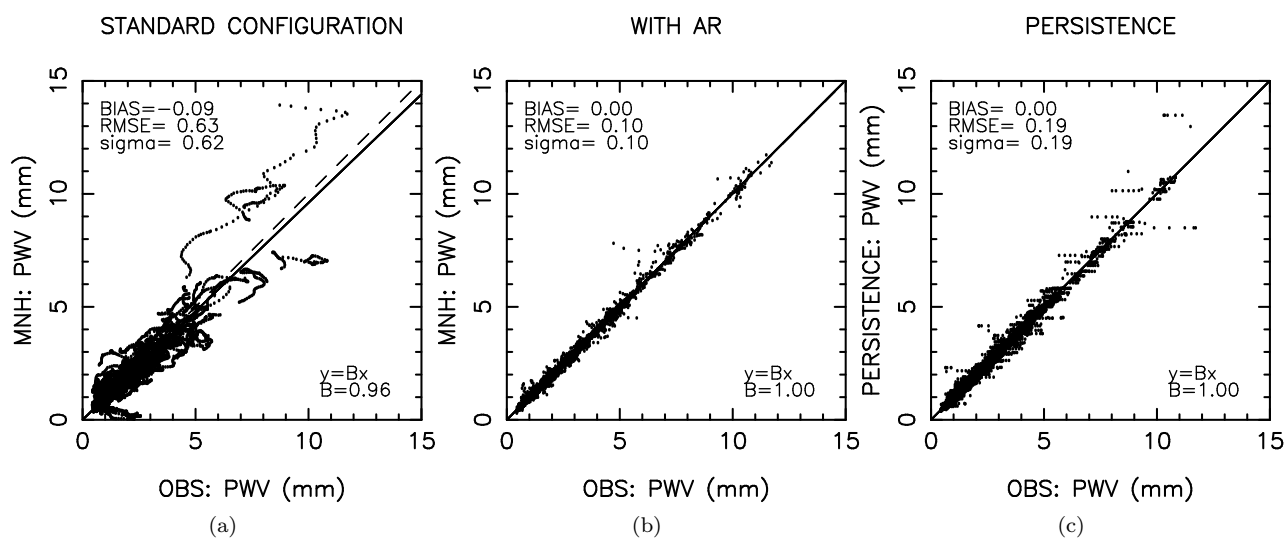


Figure 11: day1 - precipitable water vapor (mm): (a) STANDARD CONFIGURATION, (b) WITH AR (1H), (c) PERSISTENCE (1H)

3.2 DAY1: Summarizing values of bias, RMSE, SD for long and short forecast time scales

Tables in section 3.2 are included in the range: 16-18.

VARIABLE	BIAS (inc. month)	RMSE (inc. month)	SD (inc. month)	BIAS (last month)	RMSE (last month)	SD (last month)
WS ($\text{m}\cdot\text{s}^{-1}$)	-0.15	2.35	2.34	0.41	2.17	2.13
WD (degree)	-12.86	28.24	25.14	-11.71	28.22	25.67
RH (percent)	0.10	4.58	4.58	1.28	5.06	4.89
PWV (mm)	-0.09	0.63	0.62	0.28	0.78	0.72

Table 16: day1 - Statistics for variables in standard configuration: incremental month (i.e., since the beginning of service) *vs* last month (October-2024)

VARIABLE	BIAS AR (1H)	RMSE AR (1H)	SD AR (1H)		RMSE persistence (1H)	SD persistence (1H)
WS ($\text{m}\cdot\text{s}^{-1}$)	0.07	0.79	0.79		1.00	1.00
WD (degree)	0.24	6.80	6.79		14.21	13.26
RH (percent)	0.08	1.41	1.41		2.10	2.10
PWV (mm)	0.02	0.12	0.12		0.28	0.28

Table 17: day1 - Last month (October-2024): statistics for variables with AR (1H) *vs* persistence (1H)

VARIABLE	BIAS AR (1H)	RMSE AR (1H)	SD AR (1H)		RMSE persistence (1H)	SD persistence (1H)
WS ($\text{m}\cdot\text{s}^{-1}$)	0.01	0.79	0.79		0.97	0.97
WD (degree)	0.03	7.31	7.31		13.34	12.94
RH (percent)	0.04	1.03	1.03		1.42	1.42
PWV (mm)	0.00	0.10	0.10		0.19	0.19

Table 18: day1 - Incremental month (i.e., since the beginning of service): statistics for variables with AR (1H) *vs* persistence (1H)

3.3 DAY1: Probability of detection (PODi) for long and short forecast time scales

Tables in section 3.3 are included in the range: 19-24.

PARAMETER	STANDARD	WITH AR (1H)
POD1	56.9	89.2
POD2	60.8	85.5
POD3	83.2	96.5
PC	68.8	91.2
EBD	2.2	0.0

Table 19: day1 - PODs for wind speed (ms^{-1})

PARAMETER	STANDARD	WITH AR (1H)
POD1	97.8	98.7
POD2	54.0	87.6
POD3	40.4	86.3
PC	87.7	96.2
EBD	0.1	0.0

Table 20: day1 - PODs for wind speed (ms^{-1}) and thresholds (12.0,18.0) ms^{-1}

FATE - Monthly Report

PARAMETER	STANDARD	WITH AR (1H)
POD1	80.6	97.3
POD2	48.9	92.1
POD3	82.9	95.7
POD4	79.8	93.2
PC	78.3	96.0
EBD	0.5	0.0

Table 21: day1 - PODs for wind direction (degree)

PARAMETER	STANDARD	WITH AR (1H)
POD1	75.3	96.7
POD2	63.8	93.2
POD3	74.7	97.3
PC	71.5	95.6
EBD	0.4	0.0

Table 22: day1 - PODs for relative humidity (percent)

PARAMETER	STANDARD	WITH AR (1H)
POD1	99.6	99.9
POD2	34.8	85.5
POD3	0.0	0.0
PC	99.2	99.8
EBD	0.0	0.0

Table 23: day1 - PODs for relative humidity (percent) and thresholds (50,70) percent

PARAMETER	STANDARD	WITH AR (1H)
POD1	93.7	98.7
POD2	72.0	97.2
POD3	75.5	98.4
PC	85.9	98.3
EBD	0.0	0.0

Table 24: day1 - PODs for precipitable water vapor (mm)

4 NIGHT2: Statistical analysis of forecast performances

4.1 NIGHT2: Scatter plots (bias, RMSE, SD) for long and short forecast time scale

Figures in section 4.1 are included in the range: 12-18.

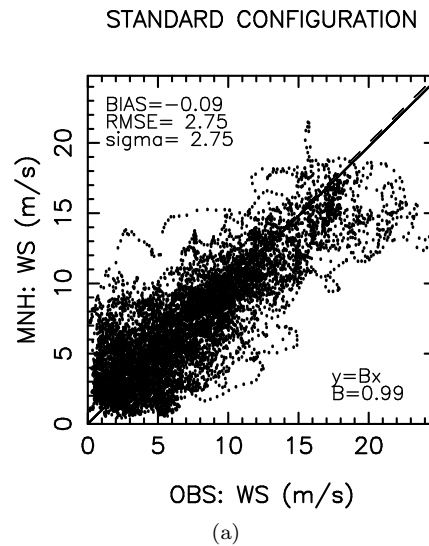


Figure 12: night2 - wind speed (ms^{-1}): STANDARD CONFIGURATION

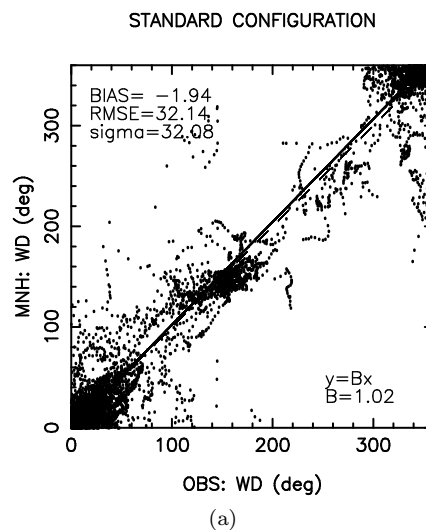


Figure 13: night2 - wind direction (degree): STANDARD CONFIGURATION

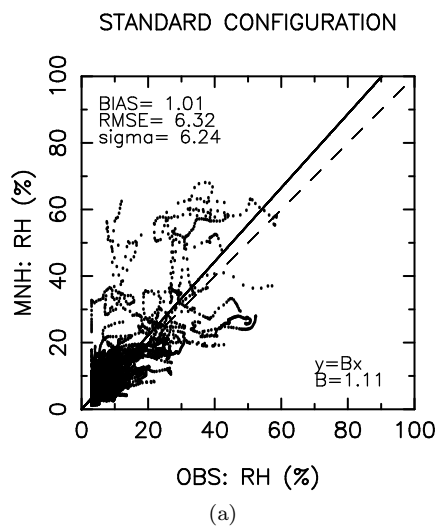


Figure 14: night2 - relative humidity (percent): STANDARD CONFIGURATION

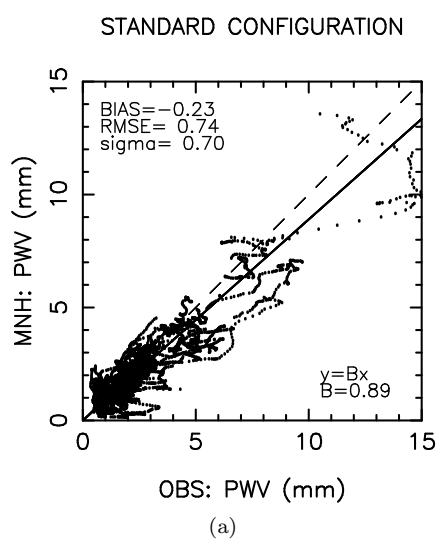


Figure 15: night2 - precipitable water vapor (mm): STANDARD CONFIGURATION

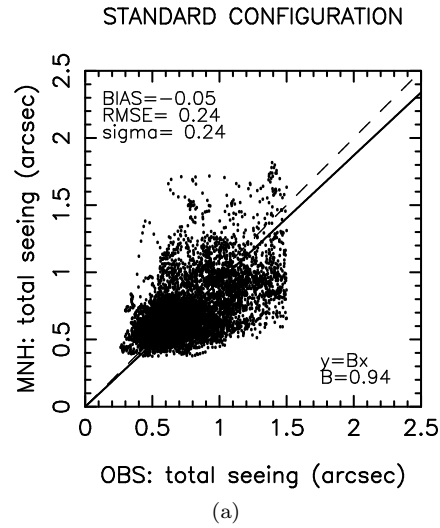


Figure 16: night2 - total seeing (arcsec): STANDARD CONFIGURATION (< 1.5")

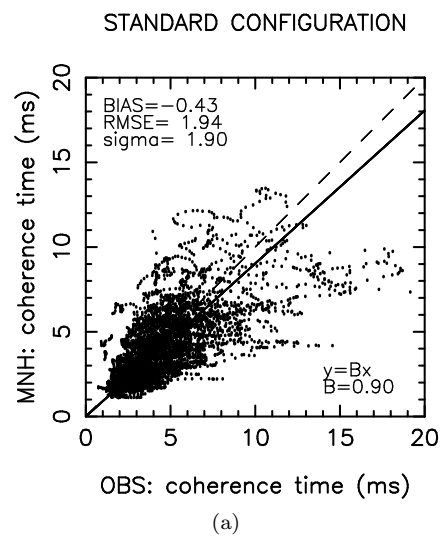


Figure 17: night2 - wavefront coherence time (ms): STANDARD CONFIGURATION

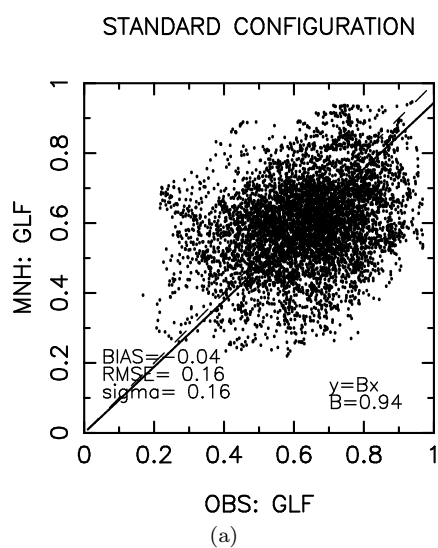


Figure 18: night2 - ground layer fraction (dimensionless): STANDARD CONFIGURATION

4.2 NIGHT2: Summarizing values of bias, RMSE, SD for long and short forecast time scales

Tables in section 4.2 are included in the range: 25.

VARIABLE	BIAS (inc. month)	RMSE (inc. month)	SD (inc. month)	BIAS (last month)	RMSE (last month)	SD (last month)
WS (m·s ⁻¹)	-0.09	2.75	2.75	0.60	2.93	2.87
WD (degree)	-1.94	32.14	32.08	2.35	35.57	35.50
RH (percent)	1.01	6.32	6.24	3.17	8.26	7.63
PWV (mm)	-0.23	0.74	0.70	-0.07	0.82	0.82
SEE (arcsec)	-0.05	0.24	0.24	-0.02	0.21	0.21
TAU (ms)	-0.43	1.94	1.90	-0.54	2.31	2.24
GLF (dimensionless)	-0.04	0.16	0.16	-0.05	0.15	0.15

Table 25: night2 - Statistics for variables in standard configuration: incremental month (i.e., since the beginning of service) *vs* last month (October-2024)

4.3 NIGHT2: Probability of detection (PODi) for long and short forecast time scale

Tables in section 4.3 are included in the range: 26-35.

PARAMETER	STANDARD
POD1	58.1
POD2	46.9
POD3	82.7
PC	65.7
EBD	3.3

Table 26: night2 - PODs for wind speed (ms^{-1})

FATE - Monthly Report

PARAMETER	STANDARD
POD1	91.7
POD2	52.2
POD3	87.3
POD4	49.0
PC	85.4
EBD	1.2

Table 27: night2 - PODs for wind direction (degree)

PARAMETER	STANDARD
POD1	65.9
POD2	59.8
POD3	85.0
PC	66.3
EBD	1.2

Table 28: night2 - PODs for relative humidity (percent)

PARAMETER	STANDARD
POD1	92.8
POD2	63.7
POD3	71.9
PC	81.8
EBD	0.4

Table 29: night2 - PODs for precipitable water vapor (mm)

PARAMETER	STANDARD
POD1	52.8
POD2	44.7
POD3	53.3
PC	50.3
EBD	6.6

Table 30: night2 - PODs for total seeing (arcsec) and accuray 0.0

PARAMETER	STANDARD
POD1	95.3
POD2	95.0
POD3	84.9
PC	93.8
EBD	4.5

Table 31: night2 - PODs for total seeing (arcsec) and accuray 0.24

FATE - Monthly Report

PARAMETER	STANDARD
POD1	81.4
POD2	47.3
POD3	51.2
PC	61.2
EBD	2.1

Table 32: night2 - PODs for wavefront coherence time (ms) and accuray 0.0

PARAMETER	STANDARD
POD1	94.4
POD2	86.7
POD3	59.9
PC	87.3
EBD	5.7

Table 33: night2 - PODs for wavefront coherence time (ms) and accuray 1.22

PARAMETER	STANDARD
POD1	46.4
POD2	48.3
POD3	29.4
PC	41.8
EBD	9.9

Table 34: night2 - PODs for ground layer fraction (dimensionless) and accuray 0.0

PARAMETER	STANDARD
POD1	91.3
POD2	89.6
POD3	57.4
PC	84.5
EBD	10.9

Table 35: night2 - PODs for ground layer fraction (dimensionless) and accuray 0.14

5 DAY2: Statistical analysis of forecast performances

5.1 DAY2: Scatter plots (bias, RMSE, SD) for long and short forecast time scale

Figures in section 5.1 are included in the range: 19-22.

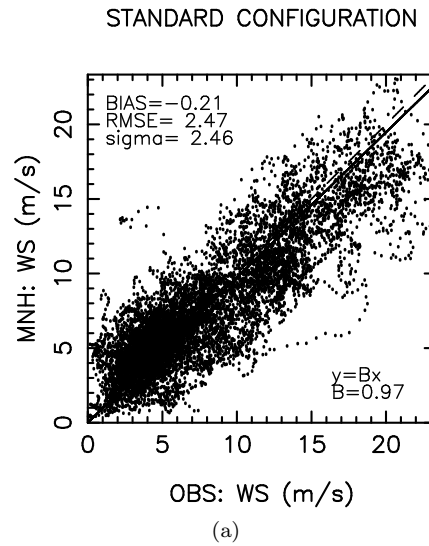


Figure 19: day2 - wind speed (ms^{-1}): STANDARD CONFIGURATION

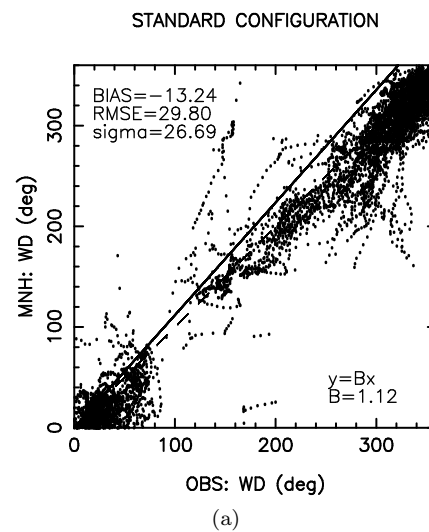


Figure 20: day2 - wind direction (degree): STANDARD CONFIGURATION

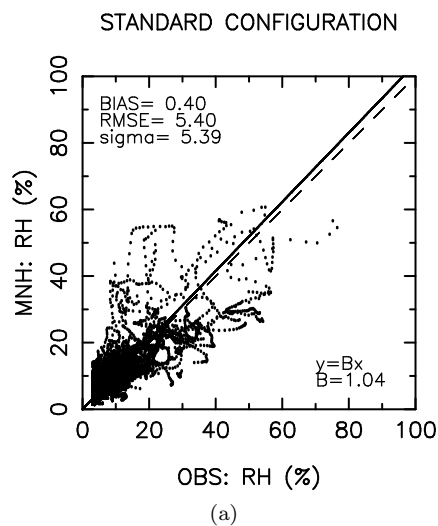


Figure 21: day2 - relative humidity (percent): STANDARD CONFIGURATION

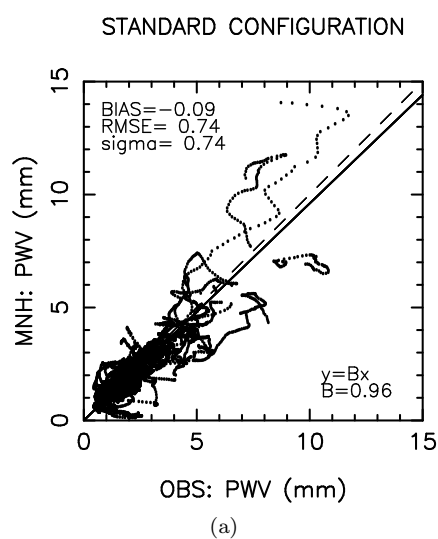


Figure 22: day2 - precipitable water vapor (mm): STANDARD CONFIGURATION

5.2 DAY2: Summarizing values of bias, RMSE, SD for long and short forecast time scales

Tables in section 5.2 are included in the range: 36.

VARIABLE	BIAS (inc. month)	RMSE (inc. month)	SD (inc. month)	BIAS (last month)	RMSE (last month)	SD (last month)
WS (m·s ⁻¹)	-0.21	2.47	2.46	0.33	2.37	2.34
WD (degree)	-13.24	29.80	26.69	-12.08	33.75	31.52
RH (percent)	0.40	5.40	5.39	2.03	6.24	5.90
PWV (mm)	-0.09	0.74	0.74	0.37	0.87	0.78

Table 36: day2 - Statistics for variables in standard configuration: incremental month (i.e., since the beginning of service) *vs* last month (October-2024)

5.3 DAY2: Probability of detection (PODi) for long and short forecast time scales

Tables in section 5.3 are included in the range: 37-40.

PARAMETER	STANDARD
POD1	57.0
POD2	62.8
POD3	83.4
PC	69.4
EBD	2.4

Table 37: day2 - PODs for wind speed (ms^{-1})

FATE - Monthly Report

PARAMETER	STANDARD
POD1	81.1
POD2	37.4
POD3	81.3
POD4	80.2
PC	77.7
EBD	0.6

Table 38: day2 - PODs for wind direction (degree)

PARAMETER	STANDARD
POD1	70.5
POD2	66.1
POD3	70.3
PC	69.1
EBD	0.5

Table 39: day2 - PODs for relative humidity (percent)

PARAMETER	STANDARD
POD1	91.0
POD2	70.2
POD3	71.4
PC	83.2
EBD	0.2

Table 40: day2 - PODs for precipitable water vapor (mm)

6 NIGHT3: Statistical analysis of forecast performances

6.1 NIGHT3: Scatter plots (bias, RMSE, SD) for long and short forecast time scale

Figures in section 6.1 are included in the range: 23-29.

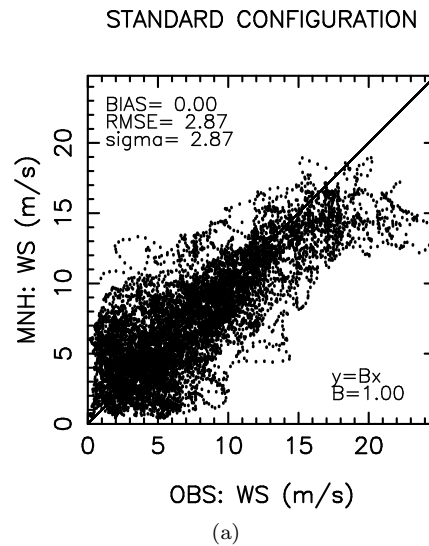


Figure 23: night3 - wind speed (ms^{-1}): STANDARD CONFIGURATION

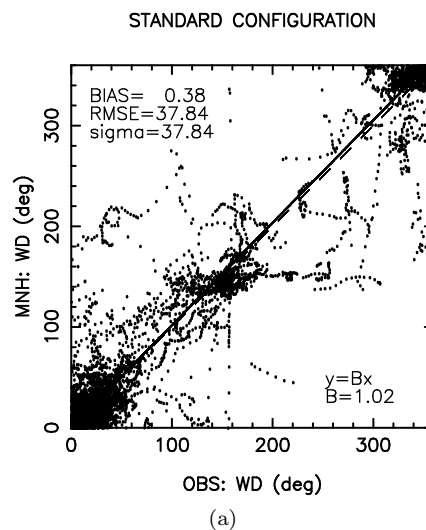


Figure 24: night3 - wind direction (degree): STANDARD CONFIGURATION

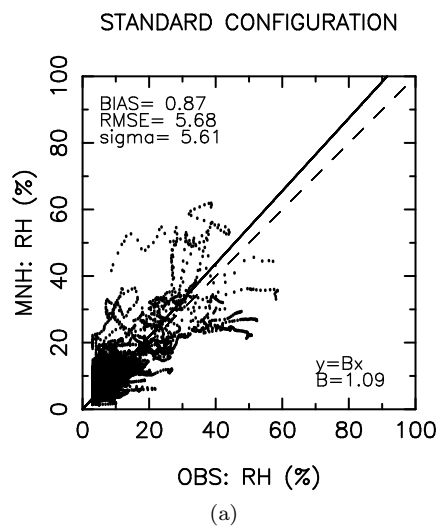


Figure 25: night3 - relative humidity (percent): STANDARD CONFIGURATION

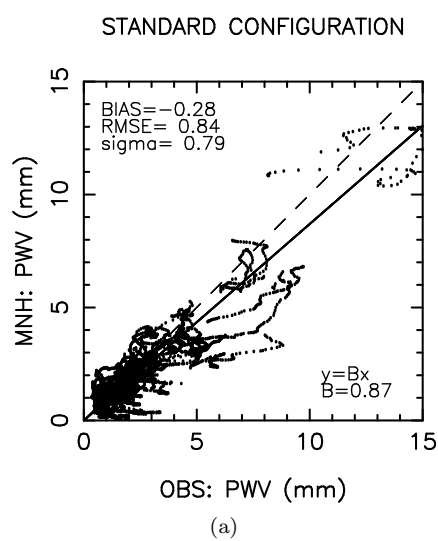


Figure 26: night3 - precipitable water vapor (mm): STANDARD CONFIGURATION

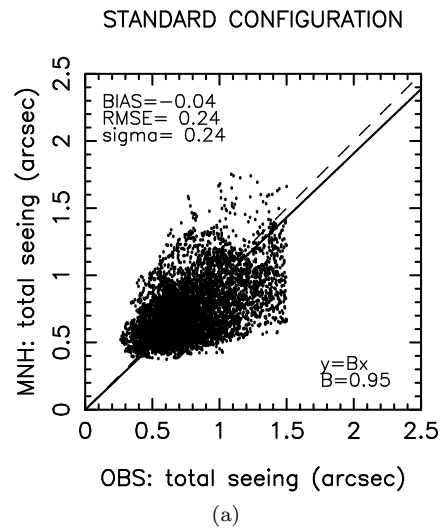


Figure 27: night3 - total seeing (arcsec): STANDARD CONFIGURATION (< 1.5")

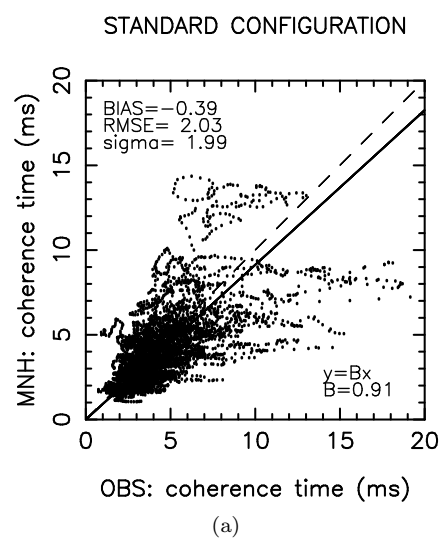


Figure 28: night3 - wavefront coherence time (ms): STANDARD CONFIGURATION

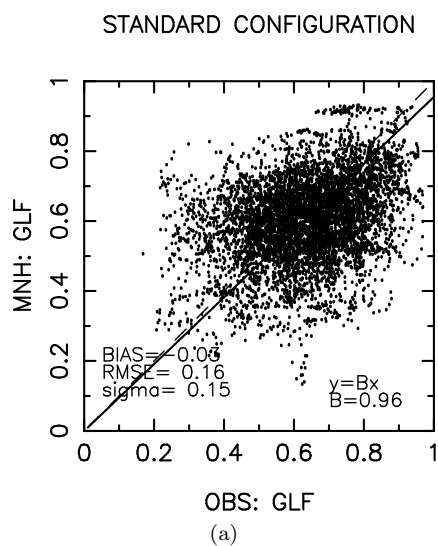


Figure 29: night3 - ground layer fraction (dimensionless): STANDARD CONFIGURATION

6.2 NIGHT3: Summarizing values of bias, RMSE, SD for long and short forecast time scales

Tables in section 6.2 are included in the range: 41.

VARIABLE	BIAS (inc. month)	RMSE (inc. month)	SD (inc. month)	BIAS (last month)	RMSE (last month)	SD (last month)
WS (m·s ⁻¹)	0.00	2.87	2.87	0.38	2.82	2.79
WD (degree)	0.38	37.84	37.84	6.74	38.22	37.62
RH (percent)	0.87	5.68	5.61	3.12	7.06	6.33
PWV (mm)	-0.28	0.84	0.79	-0.06	0.75	0.75
SEE (arcsec)	-0.04	0.24	0.24	0.01	0.20	0.20
TAU (ms)	-0.39	2.03	1.99	-0.81	2.42	2.28
GLF (dimensionless)	-0.03	0.16	0.15	-0.05	0.14	0.14

Table 41: night3 - Statistics for variables in standard configuration: incremental month (i.e., since the beginning of service) *vs* last month (October-2024)

6.3 NIGHT3: Probability of detection (PODi) for long and short forecast time scale

Tables in section 6.3 are included in the range: 42-51.

PARAMETER	STANDARD
POD1	47.0
POD2	41.9
POD3	81.9
PC	60.8
EBD	3.8

Table 42: night3 - PODs for wind speed (ms^{-1})

FATE - Monthly Report

PARAMETER	STANDARD
POD1	89.3
POD2	48.5
POD3	84.8
POD4	27.7
PC	82.1
EBD	1.8

Table 43: night3 - PODs for wind direction (degree)

PARAMETER	STANDARD
POD1	62.5
POD2	61.7
POD3	80.8
PC	64.7
EBD	2.0

Table 44: night3 - PODs for relative humidity (percent)

PARAMETER	STANDARD
POD1	93.8
POD2	56.2
POD3	59.7
PC	78.6
EBD	0.4

Table 45: night3 - PODs for precipitable water vapor (mm)

PARAMETER	STANDARD
POD1	50.9
POD2	45.1
POD3	55.4
PC	50.7
EBD	7.3

Table 46: night3 - PODs for total seeing (arcsec) and accuray 0.0

PARAMETER	STANDARD
POD1	92.1
POD2	95.2
POD3	87.1
PC	93.5
EBD	4.9

Table 47: night3 - PODs for total seeing (arcsec) and accuray 0.24

FATE - Monthly Report

PARAMETER	STANDARD
POD1	78.4
POD2	50.4
POD3	48.0
PC	60.8
EBD	1.1

Table 48: night3 - PODs for wavefront coherence time (ms) and accuray 0.0

PARAMETER	STANDARD
POD1	92.2
POD2	87.3
POD3	60.6
PC	86.8
EBD	5.4

Table 49: night3 - PODs for wavefront coherence time (ms) and accuray 1.22

PARAMETER	STANDARD
POD1	44.8
POD2	51.2
POD3	33.3
PC	43.7
EBD	8.8

Table 50: night3 - PODs for ground layer fraction (dimensionless) and accuray 0.0

PARAMETER	STANDARD
POD1	90.3
POD2	91.9
POD3	64.1
PC	86.7
EBD	9.5

Table 51: night3 - PODs for ground layer fraction (dimensionless) and accuray 0.14

7 DAY3: Statistical analysis of forecast performances

7.1 DAY3: Scatter plots (bias, RMSE, SD) for long and short forecast time scale

Figures in section 7.1 are included in the range: 30-33.

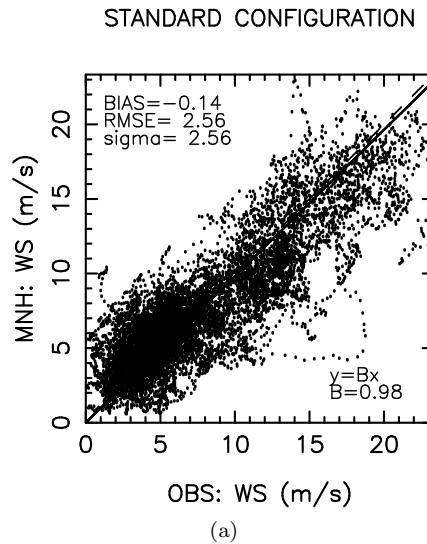


Figure 30: day3 - wind speed (ms^{-1}): STANDARD CONFIGURATION

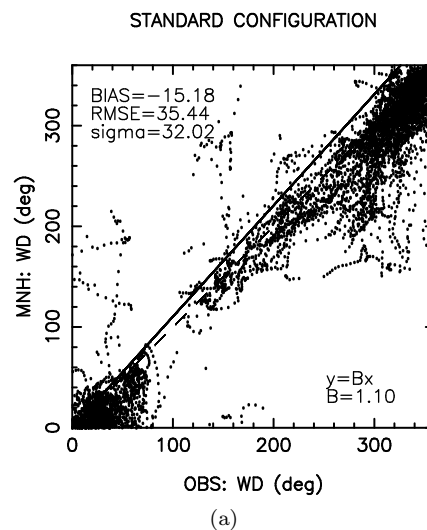


Figure 31: day3 - wind direction (degree): STANDARD CONFIGURATION

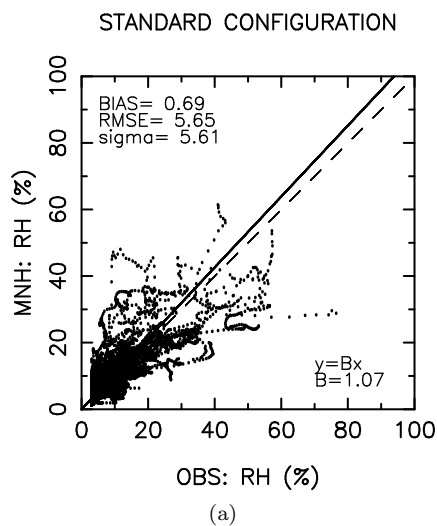


Figure 32: day3 - relative humidity (percent): STANDARD CONFIGURATION

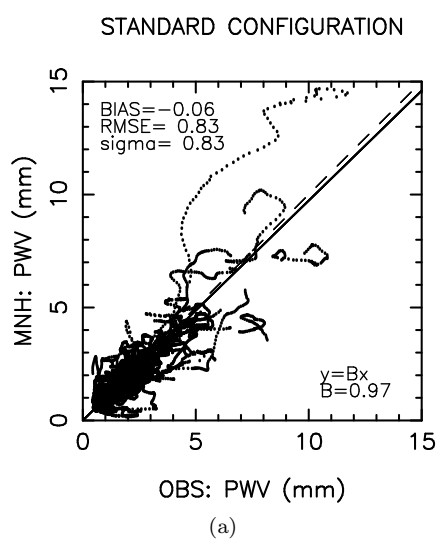


Figure 33: day3 - precipitable water vapor (mm): STANDARD CONFIGURATION

7.2 DAY3: Summarizing values of bias, RMSE, SD for long and short forecast time scales

Tables in section 7.2 are included in the range: 52.

VARIABLE	BIAS (inc. month)	RMSE (inc. month)	SD (inc. month)	BIAS (last month)	RMSE (last month)	SD (last month)
WS (m·s ⁻¹)	-0.14	2.56	2.56	0.16	2.36	2.35
WD (degree)	-15.18	35.44	32.02	-13.92	36.76	34.02
RH (percent)	0.69	5.65	5.61	2.82	6.81	6.20
PWV (mm)	-0.06	0.83	0.83	0.45	1.06	0.96

Table 52: day3 - Statistics for variables in standard configuration: incremental month (i.e., since the beginning of service) *vs* last month (October-2024)

7.3 DAY3: Probability of detection (PODi) for long and short forecast time scales

Tables in section 7.3 are included in the range: 53-56.

PARAMETER	STANDARD
POD1	52.2
POD2	61.0
POD3	83.8
PC	67.5
EBD	2.8

Table 53: day3 - PODs for wind speed (ms^{-1})

FATE - Monthly Report

PARAMETER	STANDARD
POD1	79.0
POD2	36.9
POD3	78.9
POD4	74.0
PC	74.9
EBD	1.4

Table 54: day3 - PODs for wind direction (degree)

PARAMETER	STANDARD
POD1	66.2
POD2	67.8
POD3	69.8
PC	67.2
EBD	1.0

Table 55: day3 - PODs for relative humidity (percent)

PARAMETER	STANDARD
POD1	89.5
POD2	63.9
POD3	73.6
PC	81.0
EBD	0.1

Table 56: day3 - PODs for precipitable water vapor (mm)

8 WP Statistical analysis of the forecast system failures and ESO observation availability

Table 57 reports the status of success rate in carrying out a complete forecast. Different potential sources of failure related to the operations are taken into account.

Each item in the first column starts with a label that indicates the origin of the 'potential' problem. Labels are: ECMWF, ESO, FATE. The success rate for the current month is calculated by the number of success cases divided by the number of days in a month. The success rate for the current incremental month is calculated by the number of success cases divided by the number of days since the start of the operations. The operations starting date is 20240601. The success rate is calculated using Eq.1:

$$(1 - M/E) \times 100 \quad (1)$$

where M is the number of failures and E is the number of full days. We mean with "full day" = 24h.

LEGEND:

- **ECMWF: forecasts initialisation data availability:** missing initialisation data coming from ECMWF. We consider a failure = 1 if data are not found in the main server 1a³ (or 1b) in the related specific temporal windows on 24h. Server 1a is the main server located in ESO-Santiago (Chile), server 1b is the back-up server located in ESO-Garching (Germany).

- **FATE: service network operativity:** failure on networks (main and back-up) in LaMMA. We consider a failure = 1 when both of them, the main network and the back-up network, do not allow the expected delivery on a full day.

- **ESO: server INPUT operativity for initialisation data download:** server presenting bad operation. We have a failure = 1 when the server receiving the ECMWF data-set is not responding on a time scale of a full day and initialization data can not be downloaded in the temporal windows dedicated for carrying out the forecast for a full day. (Art. 7.1)

- **ESO: server OUTPUT operativity for service product upload:** server presenting bad operation. We have a failure = 1 when the server receiving the delivery data-set from FATE is not responding and delivery data can not be uploaded (for night and day) neither on the main nor the back-up server within the time indicated in the technical specification. More precisely: two hours before the sunrise and the sunset (contract Art.7.1).

- **FATE: hydrodynamic computation success:** missing forecasts. We have a failure = 1 when the missing forecasts are due to a hydrodynamic computation numerical instability that leads to the forecast failure.

- **FATE: forecasts provision success:** missing deliveries. We have a failure = 1 when deliveries are not uploaded due to a FATE problem for a full forecast day (contract Art. 7.1).

The first five rows are independent items. The last row is the sum of the failures due to FATE. It is useful for the calculation of potential penalties. Agreed maintenance from anybody do not enter in the failure percentage computation.

Table 58 - Table 59 show the percentage of real-time observations retrieved from ESO archive daily in real-time calculated on the last month and on the whole period of the operational service starting from the starting

³See tech-note-20221019-001

date of operations up to the current month. The estimation is done for the night time (Table 58) and day time (Table 59).

The percentage is obtained through Eq.1 where M are the missing observations and E the expected observations. The expected observations are calculated considering the measurements ideally extended between the sunset and sunrise (night) and sunrise and sunset (day) with resampled data on 5 minutes time scale. The choice of 5 minutes is the largest possible $\Delta(T)$ that allows to provide a forecast at short time scale (AR) as conceived in this project.

FATE - Monthly Report

Automatic forecast system	Current month (success rate in %)	Incremental months (success rate in %)
ECMWF: forecasts initialisation data availability	100.00	100.00
FATE: service network operativity	100.00	100.00
ESO: server INPUT operativity for initialisation data download	100.00	100.00
ESO: server OUTPUT operativity for service product upload	100.00	100.00
FATE: hydrodynamic computation success	100.00	100.00
FATE: forecasts provision success	100.00	100.00

Table 57: FATE: automatic forecasting system performance - statistics. Service interruption due to maintenance by any of the parties, previously communicated and agreed, do not affect the performance percentage computation (i.e. they are not considered service failure).

Note: In agreement with ESO we mention two minor technical problems with the unique goal to keep trace of events that might be useful for statistical analysis at posteriori. Both technical problems did not affect Table 57:

- 1. on 12/10/2024 the 00 run (i.e. the one related to night1) failed because the data set of files provided daily by ECMWF used for the initialization and forcing of the automatic forecast system and for the sky transparency prediction was not completed. In particular the file G2S10120000101506001 was missing.*
- 2. on 27/10/2024 due to a temporarily failure of the LaMMA cooling system serving the data center, the data delivery related to the run 00 has been partially affected. More precisely, output data related to the night3 case have not been delivered.*

Variable	Current month (success rate %)	Incremental months (success rate %)
SEE	91.00	79.00
TAU	88.00	76.00
GLF	88.00	78.00
WS	100.00	100.00
WD	100.00	100.00
RH	100.00	96.00
PWV	42.00	42.00

Table 58: night1 - real-time observations availability

Variable	Current month (success rate %)	Incremental months (success rate %)
WS	100.00	100.00
WD	100.00	100.00
RH	100.00	100.00
PWV	99.00	99.00

Table 59: day1 - real-time observations availability

References

- [1] Masciadri, E., Turchi, A., Martelloni, G., 2020, MNRAS, 492, 140
- [2] Masciadri, E., Lascaux, F., Fini, L., 2023, MNRAS, 523, 3487
- [3] *FATE – repository : tech_note_20240219_AR_tail_effect.pdf*
- [4] *FATE – repository : legenda_fate_forecast_scheme.pdf*
- [5] Lascaux, F., Masciadri, E., Fini, L., 2015, MNRAS, 449, 1664
- [6] Turchi, A., Masciadri, E., Pathack, P., Kasper, M., 2020, 497, 4910
- [7] *FATE – repository : commissioning_bias_rmse_sd_2024_02_19_problems_AR.pdf*
- [8] *FATE – repository : technical_specifications_2023_12_14_v2.pdf*