

Todo list

- MD suggestion:** aggiungerei "(ODT)" per coerenza stilistica 11

- MD typo:** Questo titolo sfiora il margine destro di circa 20 pt nel layout FINALE (A4, `margin=2.5cm`); nel PDF di revisione, che ha i margini larghi, invece ci sta. Non è un problema di questo titolo in particolare: `titlesec` giustifica le intestazioni. RISOLTO: ho aggiunto `\raggedright` dentro i tre `\titleformat*` in `preamble.tex`, che azzerava tutti gli overfull dei titoli in una volta. Lo segnalavo solo perché tu lo sappia, e perché l'opzione di pacchetto `[raggedright]` da sola non sarebbe bastata: `\titleformat*` la sovrascrive. 11

- MD suggestion:** La direzione è giusta: la riflessione totale richiede un angolo di incidenza MAGGIORE di θ_c , ed è esattamente la convenzione in cui vale $\theta_c = \arcsin(n_{\text{clad}}/n_{\text{core}})$, cioè angoli misurati dalla normale. Misurando invece dall'asse della fibra, o come angolo radente rispetto alla superficie, la condizione si inverte e deve stare sotto $90^\circ - \theta_c$: sono due angoli diversi ed entrambe le formulazioni sono corrette. Quello che conviene sistemare è "steeper", che in inglese è ambiguo e può leggersi come "più vicino alla normale": meglio "at an angle of incidence greater than the critical angle, measured from the normal to the interface". 11

- MD suggestion:** riscrivi questa frase, o perlomeno togli la prima virgola. Non mi convince nemmeno "therefore cannot", io almeno invertirei le due parole. Anche la virgola dopo "TIR" non mi convince. Riscriverei anche la frase successiva per metterci davvero il soggetto e magari non iniziarla con "However,". 12

- MD suggestion:** Potresti scrivere "An air- or gas-filled hollow core, where $n_{\text{core}} \approx 1 < n_{\text{clad}} \approx 1.45$, cannot guide light by TIR because the required refractive index contrast is inverted. Nevertheless, such a core enables light propagation through a medium that is significantly less dispersive, nonlinear, and absorptive than silica, while also granting optical access to atoms, molecules, and particles that a solid core excludes. The central challenge of hollow-core fiber (HCF) technology is therefore to achieve optical confinement without relying on conventional index guiding." . . . 12

- **MD note:** io citerei direttamente "KNIGHT, J. C., BIRKS, T. A., RUSSELL, P. S. J., et al. All-silica single-mode optical fiber with photonic crystal cladding. *Optics Letters*, 1996, vol. 21, no. 19, p. 1547–1549. DOI: 10.1364/OL.21.001547". Questa voce non è ancora in `bibliography.bib`. 12
- **MD note:** Qui la citazione serve davvero, ed è BENABID, F., KNIGHT, J. C., ANTONOPOULOS, G., RUSSELL, P. St. J. Stimulated Raman scattering in hydrogen-filled hollow-core photonic crystal fiber. *Science*, 2002, vol. 298, no. 5592, p. 399–402. DOI: 10.1126/science.1076408. Non è in `bibliography.bib`. Attenzione a non confonderla con Couny2007, che c'è già ma è il lavoro Kagome successivo sui pettini multi-ottava, non il primo. 12
- **MD note:** Anche qui serve la citazione, ma questa ce l'hai già in `bibliography.bib`: basta `\cite{Wang2011}` (*Opt. Lett.* **36**, 669, 2011, hypocycloid-core Kagome). Controlla però la voce prima di usarla: l'elenco autori che c'è in bibliografia, "Y. Y. Wang, W. J. Wadsworth, J. C. Knight", non mi torna per quel paper. Verificalo sull'articolo. 12
- **MD suggestion:** Se il registro non ti convince, l'alternativa è "borrows concepts from condensed-matter physics". Detto questo, "draws on" è inglese idiomatico e non enfatico, quindi va bene anche com'è: prendila come facoltativa. 12
- **MD note:** io espliciterei "the cross-section of the cladding" 12
- **MD note:** Ci starebbe bene una citazione: JOANNOPOULOS, J. D., JOHNSON, S. G., WINN, J. N., MEADE, R. D. *Photonic Crystals: Molding the Flow of Light*. 2nd ed. Princeton University Press, 2008; oppure RUSSELL, P. *Photonic crystal fibers*. *Science*, 2003, vol. 299, no. 5605, p. 358–362. 13
- **MD suggestion:** io direi "into two families, according to their guiding mechanisms" 13
- **MD typo:** Se riesci a tenere tutto sulla stessa riga è meglio 15
- **MD typo:** Questione di convenzione, non un errore: in inglese il richiamo di nota va DOPO la punteggiatura, quindi "overlap [12].¹" com'è adesso è già corretto. Metterlo prima del punto è la convenzione italiana e francese. Sceglina una e tienila uguale in tutta la tesi; se la tesi è in inglese, lascia pure così. 15
- **MD suggestion:** aggiungerei una virgola qui 17

- **MD note:** La frase va bene, ma varrebbe la pena esplicitare subito il perché, che non è lo stesso delle fibre a indice: in un core cavo non esiste un vero taglio modale. Tutti i modi sono leaky (Marcatili–Schmeltzer, che hai già in bibliografia come Marcatili1964), con perdita $\propto u_{mn}^2 \lambda^2 / R^3$, e rimpicciolire il core non elimina i modi di ordine superiore: li rende solo più dissipativi. È esattamente quello che scrivi correttamente più avanti (“supports a multimode continuum ... due to the attenuation of higher-order modes”), ma anticiparlo di una riga qui evita che il lettore pensi a un parametro V e a un cutoff che in un core cavo non c’è. 17
- **MD note:** immagino avrai preso l’immagine da un paper, per cui ci vorrebbero i credits 17
- **MD note:** dipende molto anche dall’iniezione, perché nell’iniezione il tuo modo viene scomposto nella base dei modi della fibra e se è già in un singolo modo (anche non fondamentale) ci rimane in prima approssimazione. 18
- **MD typo:** Questo titolo sfiora il margine destro di 39 pt nel layout finale (A4, margin=2.5cm): è il caso peggiore del capitolo, il doppio di “...Hollow-Core Optical Fibers”. RISOLTO dal `\raggedright` aggiunto in `preamble.tex` (vedi la nota sul titolo 1.1.1). Stesso problema, e stesso fix, su “Coupling to the Motional ...” nel capitolo 1 e su “Upper Breadboard Setup and Conveyor Belt” nel capitolo 2. 19
- **MD note:** Due osservazioni. (i) Va detto che sono forze MEDIE: quello che si osserva è una media su molti cicli di eccitazione e diseccitazione, resa possibile dall’isotropia dell’emissione spontanea e dall’anisotropia dell’assorbimento. Attorno alla media restano le fluttuazioni, che sono poi quelle che fissano il limite Doppler qualche riga più sotto: basta una subordinata, non serve riscrivere il paragrafo. (ii) Più importante: la forma “richiamo elastico più smorzamento” vale solo per piccoli spostamenti e basse velocità ($kv \ll \Gamma$ e $\mu' B' z / \hbar \ll \Gamma$). Fuori da quel regime la forza del MOT è fortemente non lineare e può perfino cambiare segno, quindi il limite di validità va dichiarato. 19
- **MD suggestion:** io direi “a pair of coils in anti-Helmholtz configuration” 19
- **MD note:** il campo è nullo al centro solo se era già nullo, per cui io specificherei “generated field” 19
- **MD note:** Dentro il MOT il meccanismo di raffreddamento è il Doppler cooling (in pratica accompagnato dai meccanismi sub-Doppler). “Optical molasses” è invece il nome della configurazione a sei fasci SENZA gradiente di campo magnetico, quindi senza trappola: la melassa (Chu, 1985) è anteriore al MOT e non si definisce come “spegnere le bobine”, è semplicemente la configurazione a campo nullo. Qui scriverei “is Doppler cooling”, e poi che gli stessi fasci, in assenza di gradiente, costituiscono una optical molasses – che è già quello che dici nella frase successiva. 19

- **MD question:** Il risultato è corretto, ed è esatto entro la teoria a due livelli, bassa intensità e basse velocità: la distribuzione stazionaria degli impulsi è gaussiana, quindi la temperatura è ben definita come STATO STAZIONARIO. Hai ragione che non è un equilibrio termodinamico, ma questa è una precisazione da fare in un inciso, non un motivo per indebolire l'affermazione, e non è "un ordine di grandezza". Ho verificato anche il numero: con $\Gamma/2\pi = 6.0666$ MHz viene $145.6 \mu\text{K}$, quindi "approximately $146 \mu\text{K}$ " va bene. Quello che manca davvero è il qualificatore: è il minimo PER UN ATOMO A DUE LIVELLI. Gli alcalini reali scendono sotto grazie ai gradienti di polarizzazione (Lett et al., 1988), che è esattamente l'argomento della tua sottosezione successiva: così com'è, la frase contraddice quello che scrivi subito dopo. 20
- **MD note:** "Upon reaching the peak" suona deterministico. L'affermazione corretta è che il RATE di pompaggio ottico è massimo dove è massimo il light shift, quindi l'atomo viene pompato con maggiore PROBABILITÀ vicino alla cima della collina, non necessariamente sulla cima. Basterebbe "the optical pumping rate is largest near the top of the hill, so the atom is most likely to be pumped there". 21
- **MD suggestion:** Non è il gradiente a "interagire" con il dipolo: l'interazione è fra il dipolo indotto e il campo, $U_{\text{dip}} = -\frac{1}{2}\langle \mathbf{p} \cdot \mathbf{E} \rangle$, ed è il gradiente dell'intensità a dare la FORZA, non l'interazione. Le tue equazioni del potenziale di dipolo e della forza di dipolo (`eq:dipole_potential_general` e `eq:dipole_force`), due paragrafi più sotto, fanno esattamente questa distinzione, quindi la frase di apertura le contraddice. Riscriverei: "relies on the interaction of the light field with the dipole moment it induces in the atom; since the resulting potential is proportional to the intensity, the atom is drawn toward an intensity extremum". 22
- **MD note:** Il rimando è sbagliato: l'equazione richiamata è la POLARIZZABILITÀ, non un tasso di decadimento (`eq:polarizability_lorentz`). L'affermazione di Grimm riguarda il tasso di smorzamento classico di Larmor Γ_ω , che definisci nella riga subito sotto quell'equazione. Va corretto il riferimento. 23
- **MD suggestion:** io userei "framework" 24
- **MD note:** "Phase-coherent" da solo non basta: i due fasci devono anche essere CO-POLARIZZATI perché si formi un reticolo di intensità. Con polarizzazioni ortogonali l'intensità totale è uniforme e quello che si ottiene è un gradiente di polarizzazione, non un'onda stazionaria di intensità: sarebbe una melassa lin-perp-lin, non un conveyor belt. È anche un requisito di allineamento reale in laboratorio, quindi vale la mezza riga. 28

■ **MD typo:** Questo titolo sfiora di 22 pt nel PDF di revisione, che ha i margini larghi, ma nel layout FINALE (A4, `margin=2.5cm`) sta dentro senza problemi: verificato compilando entrambe le geometrie. Quindi qui non c'era niente da correggere nel testo; in ogni caso il `\raggedright` aggiunto in `preamble.tex` (vedi la nota sul titolo 1.1.1) copre anche questo caso. 28

■ **MD suggestion:** Due cose. Il valore di $\phi(z)$ non lo dai mai: è $\arctan(z/z_R)$, e basta scriverlo. Soprattutto, nelle Eq. dei due fasci non compare alcun termine di curvatura del fronte d'onda, $\exp(ik\rho^2/2R(z))$: più avanti scrivi "dropping wavefront curvature and Gouy phase", ma la curvatura non c'era da eliminare. O la aggiungi nell'espressione generale, o cambi quella frase in modo che si riferisca solo alla fase di Gouy. 28

■ **MD note:** Qui stai assumendo implicitamente uno splitting bilanciato. Se i due bracci non hanno la stessa potenza, l'intensità è $I_1 + I_2 + 2\sqrt{I_1 I_2} \cos(2kz)$ e il contrasto del reticolo diventa $2\sqrt{I_1 I_2}/(I_1 + I_2) < 1$: i minimi non vanno più a zero e la profondità utile della buca cala. Vale la pena dirlo in una riga, perché tutta l'efficienza di trasporto dipende dalla profondità, e nel setup reale il braccio di ritorno è quasi sempre più debole. 29

■ **MD note:** Attribuzione sbagliata: il tunneling fra siti adiacenti non è controllato dal rapporto di anisotropia Ω_z/Ω_{rad} , ma dalla PROFONDITÀ del reticolo in unità di rinculo, $|U_0|/E_R$, che fissa la larghezza di banda di Bloch. Un reticolo molto anisotropo ma poco profondo lascia passare il tunneling senza problemi. Riscriverei attribuendolo alla profondità, e lasciando all'anisotropia solo quello che le compete, cioè la forma a disco. 30

■ **MD note:** Il segno non è cosmetico: inverte la DIREZIONE di trasporto. Nel caso simmetrico l'involuppo è $\cos^2(\pi\Delta\nu t - kz)$ e il reticolo va verso $+z$; qui è $\cos^2(kz + \pi\Delta\nu t)$ e va verso $-z$. E la differenza non sta nel fatto che il detuning sia simmetrico o su un solo braccio: sta in QUALE braccio porta la frequenza più alta. Nel primo caso è il fascio che va verso $+z$, nel secondo quello che va verso $-z$. La regola generale, che vale in entrambi i casi, è che il reticolo si muove nel verso di propagazione del fascio a frequenza MAGGIORE, con $|v| = \lambda\Delta\nu/2$. Se la scrivi così, l'affermazione "produces the same effect" diventa precisa invece che approssimativa. 31

■ **MD note:** Giusto, ma è un doppio best case e converrebbe dirlo. Primo: nell'Eq. del potenziale inclinato usi U_0 nudo, senza l'involuppo gaussiano $w_0^2/w^2(z)$ e senza il fattore radiale, quindi a_0 vale sull'asse e al fuoco. Un atomo fuori asse, o lontano dal fuoco, vede una buca meno profonda e sfugge a un'accelerazione minore. Secondo: a temperatura finita gli atomi superano la barriera ridotta prima che questa si annulli, quindi in pratica si sta ben sotto a_0 . Vale una riga, perché è il numero che poi limita davvero il tempo di trasporto. 34

■ **MD suggestion:** Attenzione al riuso dei simboli fra sezioni. Qui ν è la frequenza di trappola, ma nella sezione sul conveyor belt ν è la frequenza ottica dei fasci e $\Delta\nu$ il battimento: sono tre cose diverse con lo stesso simbolo nello stesso capitolo. Stessa cosa per la larghezza naturale, che qui è γ e nella sezione sulla trappola di dipolo è Γ . Sceglirei ω_{trap} (o ν_{trap}) qui, e userei un solo simbolo per la larghezza in tutto il capitolo. 35

■ **MD typo:** Virgola che unisce due proposizioni indipendenti (comma splice). Metterei i due punti o il punto e virgola: "The transport itself is a source of heating: the transverse compression required to match the fiber mode increases the trap frequencies and raises the transverse temperature." 35

■ **MD note:** Qui ci sono due problemi. (1) La costante non torna: se sottrai $E_e - \hbar\omega_p$ da tutti e tre i livelli, lo stato $|e\rangle$ finisce a zero, non a $-\hbar\Delta_p$ come scrivi nell'equazione dopo. Quello che stai facendo davvero è porre l'origine delle energie su $|g_1\rangle$, cioè sottrarre E_{g_1} . (2) Più sostanziale: nel frame rotante $|g_2\rangle$ acquista il termine $-\hbar\delta_{2\text{ph}}|g_2\rangle\langle g_2|$, che nella tua espressione manca. Si annulla solo a risonanza a due fotoni, che però assumi soltanto nella frase SUCCESSIVA, mentre l'equazione è presentata come generale. E il termine ti serve davvero, perché più avanti scansioni proprio $\delta_{2\text{ph}} \neq 0$ per ricavare il profilo di assorbimento. 36

■ **MD note:** La diagonale della matrice è scambiata rispetto alla base che dichiari. Con $H_0 = -\hbar\Delta|e\rangle\langle e|$ si ha $\langle e|H_0|e\rangle = -\hbar\Delta$ e $\langle\psi_C|H_0|\psi_C\rangle = 0$, quindi nella base $\{|e\rangle, |\psi_C\rangle\}$ la diagonale è $(-\Delta, 0)$, non $(0, -\Delta)$. Gli autovalori non cambiano, ed è per questo che l'equazione delle energie vestite resta giusta, ma cambia l'ETICHETTA degli autovettori, e da lì l'errore si propaga in tre punti (vedi le note seguenti). Con la diagonale corretta viene $\tan\theta = (\Delta + \sqrt{\Delta^2 + \Omega^2})/\Omega$, che per $\Delta \gg \Omega$ è grande, cioè $\theta \rightarrow \pi/2$: quindi $|\psi_+\rangle$ è quello ground-like, non quello excited-like. 37

■ **MD note:** Le etichette $\pm$ sono invertite, ed è una conseguenza della diagonale scambiata (vedi nota sopra). Il controllo decisivo è interno alla tua stessa trattazione: $E_+ = (-\Delta + \sqrt{\Delta^2 + \Omega^2})/2 \cdot \hbar$ è ESATTAMENTE lo shift AC Stark δ che scrivi qualche riga più sotto, e lo shift AC Stark è per definizione quello dello stato ground-like stretto, non di quello excited-like largo. Verificato numericamente con $\Delta = 10$, $\Omega = 1$: lo stato a E_+ ha $|\langle e|\psi\rangle|^2 = 0.0025$, quello a E_- ha 0.998. Quindi $|\psi_+\rangle$ è ground-like e stretto, con $\gamma\Omega^2/(4\Delta^2)$, e $|\psi_-\rangle$ è excited-like e largo, con circa γ : nel testo è scritto al contrario. Da correggere anche la didascalia della figura dello spettro di assorbimento, che ripete lo stesso scambio. 38

■ **MD note:** Questa definizione è quella giusta per il processo a due fotoni, ma non coincide con quella che hai dato nella sezione sul conveyor belt, dove $\eta = k_c x_0$ con il solo vettore d'onda del fascio di raffreddamento. Il rimando poco sopra manda a quell'equazione come se fosse la stessa cosa. Metterei un rimando in avanti là ("la definizione appropriata per il processo a due fotoni è data in Sez. ..."), oppure definirei η una volta sola qui. 39

■ **MD note:** Terzo punto in cui si propaga lo scambio $\pm$: la risonanza stretta spostata dall'AC Stark shift è $|\psi_+\rangle$, non $|\psi_-\rangle$ (vedi le due note precedenti). Il resto della frase è corretto e non va toccato. 40

Contents

1	Theoretical Background	11
1.1	Hollow-Core Photonic Crystal Fibers	11
1.1.1	From Conventional to Hollow-Core Optical Fibers	11
1.1.2	Photonic Bandgap and Inhibited Coupling Guiding Mechanisms	12
1.1.3	Kagome-Lattice Hollow-Core Fibers	15
1.2	Electromagnetic Trapping of Neutral Atoms	19
1.2.1	The Magneto-Optical Trap	19
1.2.2	Polarization Gradient Cooling	20
1.2.3	The Optical Dipole Trap	22
1.2.3.1	Oscillator model and semiclassical treatment	22
1.2.3.2	Quantum-mechanical picture	24
1.2.3.3	Multi-level atoms and the alkali <i>D</i> -lines	25
1.3	Optical Conveyor Belt	28
1.3.1	Interference of Counter-Propagating Gaussian Beams and the Stationary Lattice	28
1.3.2	Geometry of the Trapping Potential	30
1.3.3	Kinematics of the Moving Standing Wave	30
1.3.4	Trap-Depth Scaling and Adiabatic Compression	32
1.3.5	Dynamics in the Accelerated Potential	33
1.4	Electromagnetically Induced Transparency Cooling	35

1.4.1	Introduction to EIT Cooling	35
1.4.2	The Three-Level Λ System and Coherent Population Trapping	35
1.4.3	Dressed States and the Fano Absorption Spectrum	37
1.4.4	Coupling to the Motional Degrees of Freedom	39
1.4.5	Cooling Dynamics and the Theoretical Limit	41

Chapter 1

Theoretical Background

This chapter provides an overview of the theoretical background underlying the main topics addressed in this thesis.

The first part introduces hollow-core fibers and describes their light-guiding mechanisms. This is followed by an overview of atomic trapping techniques, starting from the magneto-optical trap (MOT) and the optical dipole trap, outlining the fundamental principles that enable the cooling and confinement of neutral atoms.

MD suggestion: aggiungerei "(ODT)" per coerenza stilistica

Building on these concepts, more advanced manipulation techniques are then discussed. Specifically, the concept of the optical conveyor belt is introduced, demonstrating how moving optical lattices allow for the controlled transport of atoms. Finally, the theoretical principles of electromagnetically induced transparency (EIT) cooling are presented, highlighting its potential for achieving sub-Doppler temperatures inside the fiber core.

1.1 Hollow-Core Photonic Crystal Fibers

1.1.1 From Conventional to Hollow-Core Optical Fibers

A conventional optical fiber guides light through Total Internal Reflection (TIR). In a step-index fiber, a solid dielectric core of refractive index n_{core} is surrounded by a cladding of lower index n_{clad} , with $n_{\text{core}} > n_{\text{clad}}$. When light propagating inside the core meets the core-cladding interface at an angle steeper than the critical angle $\theta_c = \arcsin(n_{\text{clad}}/n_{\text{core}})$, it is fully reflected and remains trapped within the core over macroscopic distances. Standard telecommunications fibers, based on a silica core ($n \approx 1.45$) slightly doped to increase its index with respect to the

MD typo: Questo titolo sfiora il margine destro di circa 20 pt nel layout FINALE (A4, `margin=2.5cm`); nel PDF di revisione, che ha i margini larghi, invece ci sta. Non è un problema di questo titolo in particolare: `titlesec` giustifica le intestazioni. RISOLTO: ho aggiunto `\raggedright` dentro i tre `\titleformat*` in `preamble.tex`, che azzerano tutti gli overfull dei titoli in una volta. Lo segnalo solo perché tu lo sappia, e perché l'opzione di pacchetto `[raggedright]` da sola non sarebbe bastata: `\titleformat*` la sovrascrive.

MD suggestion: La direzione è giusta: la riflessione totale richiede un angolo di incidenza MAGGIORE di θ_c , ed è esattamente la convenzione in cui vale $\theta_c = \arcsin(n_{\text{clad}}/n_{\text{core}})$, cioè angoli misurati dalla normale. Misurando invece dall'asse

cladding, are a well-known example of this guiding mechanism and form the basis of modern optical networks.

A hollow, air- or gas-filled core, where $n_{\text{core}} \approx 1 < n_{\text{clad}} \approx 1.45$, therefore cannot guide by TIR, since the index hierarchy is reversed. However, it would allow light to propagate through a medium far less dispersive, less nonlinear, and less absorptive than silica, while simultaneously opening the core to atoms, gases, and particles for which a solid core is a physical barrier. The central challenge of hollow-core fiber (HCF) technology is therefore to find a confinement mechanism that does not rely on an index hierarchy between core and cladding.

Hollow-core guidance was first attempted in the 1980s and 1990s using metal-coated waveguides and simple glass capillaries, but these suffered from high losses due to the lack of an efficient low-loss cladding. This limitation was overcome with the invention of the solid-core photonic crystal fiber (PCF) in 1996, whose concept was extended to hollow cores in 1999 with the first hollow-core photonic bandgap fibers (HC-PBGFs), where light confinement is achieved through the photonic bandgap of a periodically microstructured cladding [1].

Alternative designs were therefore developed, including Kagome-lattice hollow-core fibers, introduced in 2002. In these structures, light confinement does not rely on a bandgap but on suppressed coupling between core and cladding modes (see Section 1.1.2). Further improvements were achieved around 2010 with the introduction of negative-curvature (hypocycloid) core boundaries, which significantly reduce confinement losses. This approach led to simplified antiresonant fiber (ARF) designs and, more recently, to nested antiresonant nodeless fibers (NANFs).

The main milestones in this development are summarized in Fig. 1.1. The evolution of these structures can be understood through two main trends: the progressive simplification of the cladding geometry and the transition between different light-confinement mechanisms.

1.1.2 Photonic Bandgap and Inhibited Coupling Guiding Mechanisms

The theoretical description of HCPCFs draws on concepts developed in condensed matter physics. In a crystalline solid, the periodic potential experienced by electrons gives rise to allowed energy bands separated by forbidden gaps in which no electronic states can exist. In the optical case, the periodic electronic potential is replaced with a periodic dielectric modulation: the cladding of an HCPCF is a two-dimensional photonic crystal, and the hollow core introduces a structural defect, much like a vacancy or impurity in a semiconductor. Solving the electromagnetic wave equation in the presence of this periodic structure yields eigenmodes

MD suggestion: riscrivi questa frase, o perlomeno togli la prima virgola. Non mi convince nemmeno "therefore cannot", io almeno invertirei le due parole. Anche la virgola dopo "TIR" non mi convince. Riscriverei anche la frase successiva per metterci davvero il soggetto e magari non iniziarla con "However,".

MD suggestion: Potresti scrivere "An air- or gas-filled hollow core, where $n_{\text{core}} \approx 1 < n_{\text{clad}} \approx 1.45$, cannot guide light by TIR because the required refractive index contrast is inverted. Nevertheless, such a core enables light propagation through a medium that is significantly less dispersive, nonlinear, and absorptive than silica, while also granting optical access to atoms, molecules, and particles that a solid core excludes. The central challenge of hollow-core fiber (HCF) technology is therefore to achieve optical confinement without relying on conventional index guiding."

MD note: io citerei direttamente "KNIGHT, J. C., BIRKS, T. A., RUSSELL, P. S. J., et al. All-silica single-mode optical fiber with photonic crystal cladding. Optics Letters, 1996, vol. 21, no. 19, p. 1547–1549. DOI: 10.1364/OL.21.001547". Questa voce non è ancora in `bibliography.bib`.

MD note: Qui la citazione serve davvero, ed è BEN-ABID, F., KNIGHT, J. C., ANTONOPOULOS, G., RUSSELL, P. St. J. Stimulated Raman scattering in hydrogen-filled hollow-core photonic crystal fiber. Science, 2002, vol. 298, no. 5592, p. 399–402. DOI: 10.1126/science.1076408. Non è in `bibliography.bib`. Attenzione a non confonderla con Couny2007, che c'è già ma è il lavoro Kagome successivo sui pettini multi-ottava, non il primo.

MD note: Anche qui serve la citazione, ma questa ce l'hai già in `bibliography.bib`: basta `\cite{Wang2011}` (Opt. Lett. **36**, 669, 2011, hypocycloid-core Kagome). Controlla però la voce prima di usarla: l'elenco autori che c'è in bibliografia, "Y. Y. Wang, W. J. Wadsworth, J. C. Knight", non mi torna per quel paper. Verificalo sull'articolo.

MD suggestion: Se il registro non ti convince, l'alternativa è "borrows concepts from condensed-matter physics". Detto questo, "draws on" è inglese idiomatico e non enfatico, quindi va bene anche com'è: prendila come facoltativa.

MD note: io espliciterei "the cross-section of the cladding"

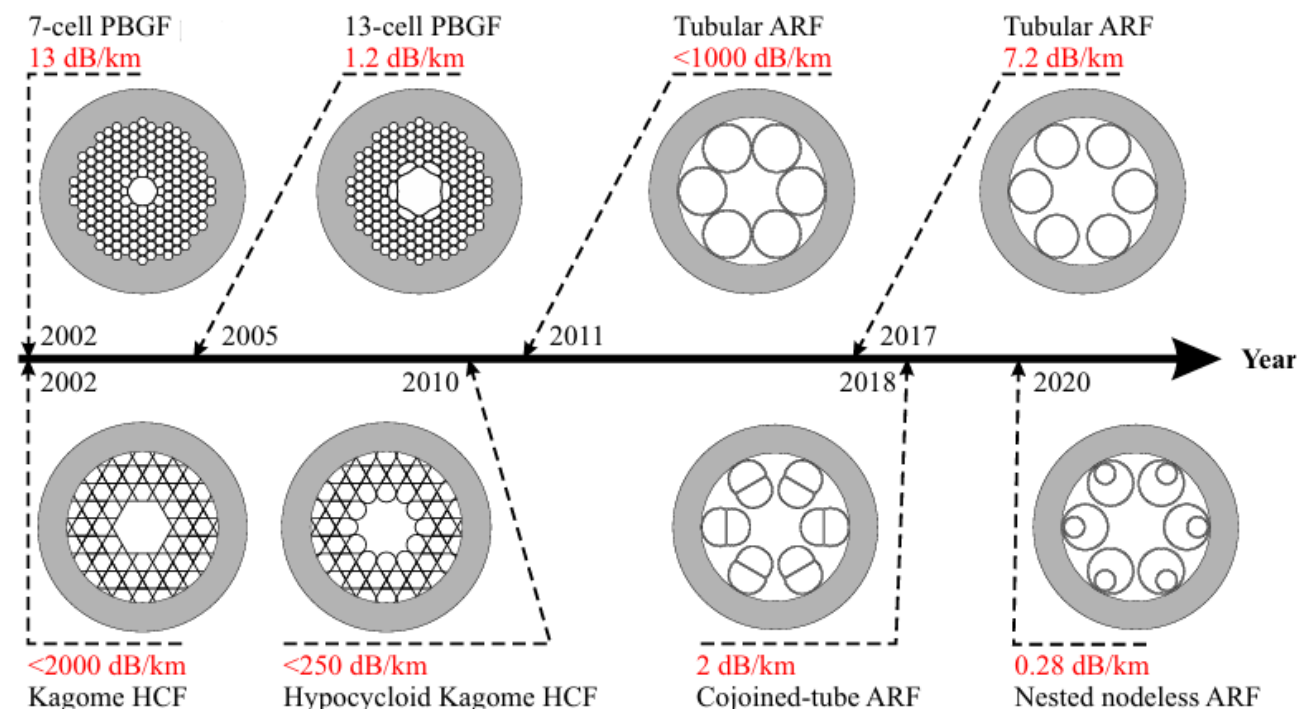


Figure 1.1: *Timeline illustrating the structural evolution of hollow-core optical fibers. The progression highlights the transition from early photonic bandgap fibers (PBGF) to advanced antiresonant architectures (ARF), including Kagome, cojoined-tube, and nested nodeless designs. Attenuation values are given for the wavelength of 1550 nm. Credits [1].*

organized in bands, with the possibility of forbidden spectral regions in which the cladding does not support propagating modes.

Mathematically, this is cast as an eigenvalue problem for the mode amplitudes, which take the form $E \propto e^{i\beta z}$ along the fiber axis z , where β is the longitudinal propagation constant. The set of allowed solutions defines the Density of Photonic States (DOPS), conventionally expressed in terms of the effective refractive index $n_{\text{eff}} = \beta/k_0$, where $k_0 = \omega/c$ is the vacuum wavenumber [2]. A diagram of the DOPS in the (n_{eff}, ω) plane plays, for photons, the same role that a band structure diagram plays for electrons: it identifies which modes can exist at a given frequency and effective index.

Based on the structure of the DOPS, HCPCFs are divided into two distinct guiding regimes: Photonic Band Gap (PBG) and Inhibited Coupling (IC), schematically compared in Fig. 1.2 together with conventional TIR guidance.

Photonic Band Gap (PBG) guidance. In PBG fibers, the periodic cladding is engineered so that for certain ranges of (ω, n_{eff}) the DOPS is zero: no propagating cladding modes exist, and these forbidden regions are the photonic bandgaps. Guidance is achieved by introducing a hollow-core defect whose localized optical mode falls within one of these gaps: the core mode cannot leak into the surrounding structure because there are no available cladding states

MD note: Ci starebbe bene una citazione: JOANNOPOULOS, J. D., JOHNSON, S. G., WINN, J. N., MEADE, R. D. Photonic Crystals: Molding the Flow of Light. 2nd ed. Princeton University Press, 2008; oppure RUSSELL, P. Photonic crystal fibers. Science, 2003, vol. 299, no. 5605, p. 358–362.

MD suggestion: io direi "into two families, according to their guiding mechanisms"

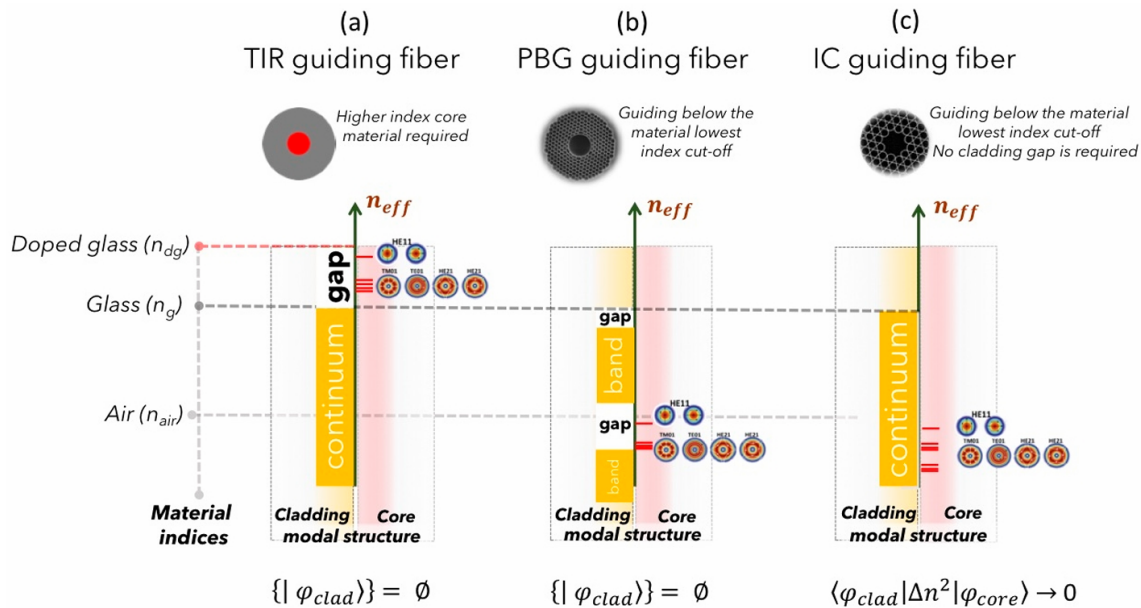


Figure 1.2: Schematic comparison of the internal reflection, PBG and IC guiding mechanisms. The effective index n_{eff} is plotted on the vertical axis, with the relevant index levels marked by horizontal dashed lines. The graphs display the cladding photonic bands versus n_{eff} , highlighting the core guidance regimes through continua (orange rectangles) and bandgaps (white rectangles). For TIR and PBG fibers, core modes are guided within the gaps. In contrast, IC fibers exhibit no bandgaps, and guidance occurs alongside the cladding mode continuum. Credits [3].

to couple into at that effective index [4]. PBG fibers deliver extremely low confinement losses, but their transmission is restricted to the narrow spectral bandwidth of the bandgap itself. For applications requiring the simultaneous guidance of widely separated wavelengths, for instance, multiple atomic transitions co-propagating in the same fiber, this narrowness becomes a limitation.

Inhibited Coupling (IC) guidance. Unlike photonic bandgap fibers, IC fibers do not require a forbidden spectral region in the cladding; instead, the core mode coexists with a continuum of cladding modes of similar effective refractive index n_{eff} , and confinement is achieved by suppressing the coupling between them. By treating the silica microstructure as a local dielectric perturbation $\Delta n^2(x, y)$ introduced into a uniform vacuum background, the interaction between a core mode $|\varphi_{core}\rangle$ and a cladding mode $|\varphi_{clad}\rangle$ can be described by the overlap integral [3]

$$\langle\varphi_{clad}|\Delta n^2|\varphi_{core}\rangle = \iint_{\text{cross-section}} \varphi_{clad}^*(x, y) \Delta n^2(x, y) \varphi_{core}(x, y) dx dy. \quad (1.1)$$

In this expression, the term Δn^2 restricts the interaction to the physical regions where the silica glass is present. Whenever the fiber geometry is engineered to suppress this integral, the core mode uncouples from the cladding and remains tightly confined.

This behavior is closely related to a Bound State in the Continuum (BIC), a concept introduced by von Neumann and Wigner in 1929 [5] to describe a localized state that remains confined due to symmetry or destructive interference despite its energy lying within a continuous spectrum of radiative states.

Two mechanisms can drive the integral in Eq. 1.1 toward zero. The first is a *reduced spatial overlap*: if the core and cladding fields occupy largely disjoint regions of the transverse plane, the integrand is small everywhere and so is the integral. The second is a *transverse phase mismatch*, which is best seen by decomposing each mode into azimuthal harmonics, $\varphi(r, \theta) = \sum_m A_m R_m(r) e^{im\theta}$. Substituting into Eq. 1.1 separates the integral into a radial part and an azimuthal part,

$$\langle \varphi_{\text{clad}} | \Delta n^2 | \varphi_{\text{core}} \rangle \propto \int_{r_1}^{r_2} R_{\text{clad}}(r) R_{\text{core}}^*(r) r dr \times \int_0^{2\pi} e^{i(m_{\text{clad}} - m_{\text{core}})\theta} d\theta, \quad (1.2)$$

where m_{clad} and m_{core} are the azimuthal indices of the two modes. The azimuthal integral vanishes whenever $m_{\text{clad}} \neq m_{\text{core}}$: modes with different azimuthal order are orthogonal, and their coupling is suppressed by symmetry regardless of their spatial overlap [3].¹ By engineering the cladding geometry so that the cladding modes carry a high azimuthal index m while the fundamental core mode has $m \approx 0$, the phase-mismatch term in Eq. 1.2 strongly suppresses the coupling over a broad spectral range.

Because IC guidance is based on local mode interactions rather than on a global photonic bandgap, IC fibers can provide broadband transmission compared with PBG fibers, whose bandwidth is limited by the spectral range of the bandgap [3].

1.1.3 Kagome-Lattice Hollow-Core Fibers

The Kagome-lattice fiber is a primary realization of the Inhibited Coupling guiding mechanism [3]. Its cladding is a trihexagonal tiling, formed by a network of thin silica capillaries that create a periodic pattern of large hexagonal and smaller triangular interstitial air holes (see Fig. 1.3a).

Confinement in this regime is achieved through the two suppression strategies identified in Section 1.1.2. The thin silica struts support cladding modes with a highly oscillatory transverse phase, characterized by a high azimuthal index number m , while the fundamental core mode features a slowly varying, nearly Gaussian profile with $m \approx 0$. The strong mismatch in m makes the azimuthal integral in Eq. 1.2 vanish, so that the core mode cannot couple into the surrounding glass network despite the spectral overlap with the cladding continuum.

¹In an idealized axisymmetric model, the azimuthal integral vanishes for modes with different azimuthal indices. In a real Kagome fiber, the discrete cladding geometry breaks perfect cylindrical symmetry, so the suppression of coupling is approximate and depends on the detailed modal overlap and phase matching.

MD typo: Se riesci a tenere tutto sulla stessa riga è meglio

MD typo: Questione di convenzione, non un errore: in inglese il richiamo di nota va DOPO la punteggiatura, quindi "overlap [12].¹" com'è adesso è già corretto. Metterlo prima del punto è la convenzione italiana e francese. Scegline una e tienila uguale in tutta la tesi; se la tesi è in inglese, lascia pure così.

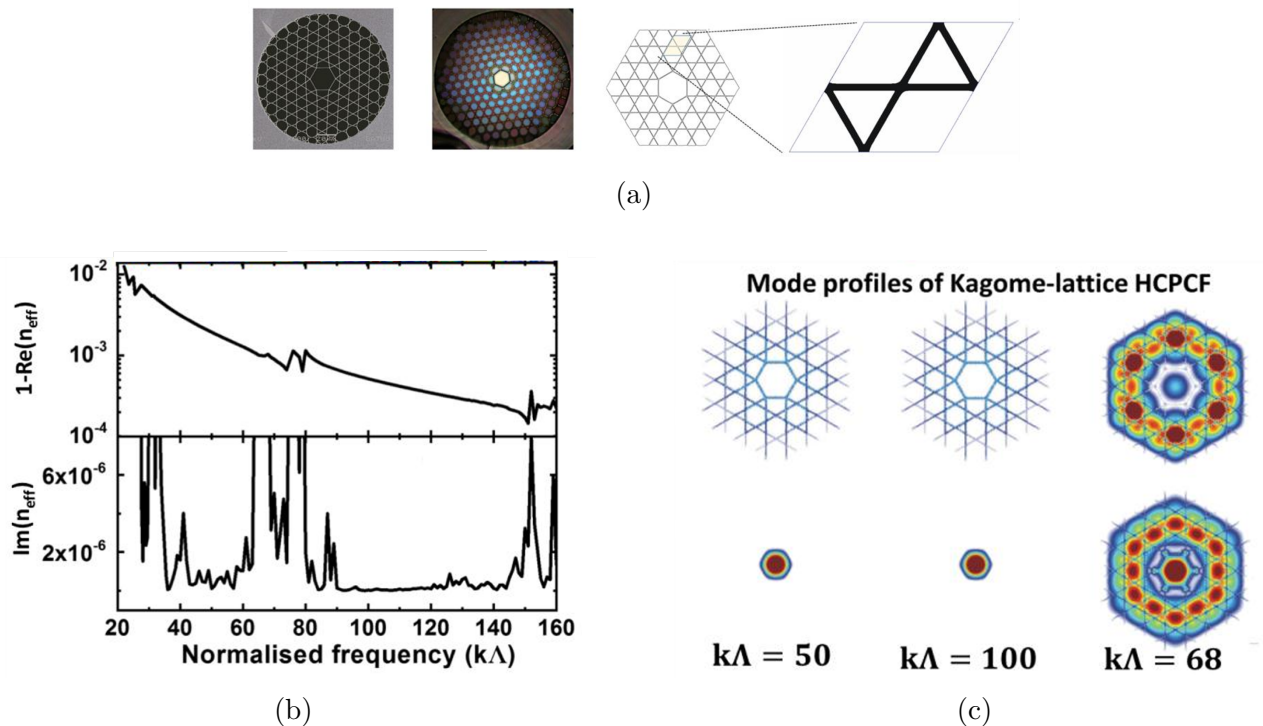


Figure 1.3: Overview of guidance in a hypocycloid-core Kagome fiber. **(a)** Scanning electron microscopy micrographs and structural unit cell. **(b)** Real and imaginary parts of the effective index of the fundamental core mode as a function of the normalized frequency $k\Lambda$: $\text{Im}(n_{\text{eff}})$, proportional to the propagation loss, remains low except at a series of sharp resonance peaks. **(c)** Transverse intensity profile of the same mode at three representative frequencies: tight confinement at $k\Lambda = 50$ and $k\Lambda = 100$, and loss of confinement at the resonance $k\Lambda = 68$. Credits [3].

This coupling suppression is not, however, absolute across the entire spectrum. The silica struts behave as thin dielectric slabs, and at the wavelengths for which a slab becomes resonant its transverse phase matches that of the core mode leading to hybridization. These discrete resonances produce the sharp loss peaks visible in Fig. 1.3b. Their location follows from the transverse resonance condition of a dielectric slab of thickness t and index n_g surrounded by air. Requiring the optical round-trip phase inside the slab to be an integer multiple of 2π , and accounting for the phase accumulated at the air–glass interfaces at grazing incidence (the regime relevant to a hollow core), i.e.

$$2 \left(\frac{2\pi}{\lambda} \sqrt{n_g^2 - 1} \right) t = 2\pi j, \quad (1.3)$$

yields the resonance condition [3]

$$\lambda_j = \frac{2t\sqrt{n_g^2 - 1}}{j}, \quad j = 1, 2, 3, \dots, \quad (1.4)$$

where j is the radial mode order of the strut. Equivalently, in terms of the normalized frequency

$$k\Lambda = (2\pi/\lambda)\Lambda,$$

$$k\Lambda = \frac{j\pi\Lambda}{t\sqrt{n_g^2 - 1}}. \quad (1.5)$$

At these wavelengths the strut is resonant and transmits rather than reflects the transverse field, so the core mode leaks into the cladding and the confinement breaks down, as shown at $k\Lambda = 68$ in Fig. 1.3c. Between consecutive resonances the slab is antiresonant and acts as a high reflector: the m -mismatch is restored and the light is tightly localized in the core (e.g. at $k\Lambda = 50$ or 100). Because the resonance wavelengths scale linearly with t , fabricating fibers with nanoscale glass webs pushes the resonances toward shorter wavelengths, thereby opening ultra-broadband transmission windows in the spectral region of interest.

To reduce confinement loss the core boundary can be engineered with a hypocycloidal (or negative-curvature) profile by incorporating a series of inward-pointing glass arcs (as depicted in Fig. 1.1). This geometry increases the phase mismatch and reduces the overlap between the core mode and the surrounding silica [3].

MD suggestion: aggiungerei una virgola qui

Higher order modes Similar to standard hollow capillaries and conventional fibers, the core of a Kagome IC fiber supports multiple transverse modes, denoted by the $LP_{m,n}$ notation where m and n represent the azimuthal and radial mode numbers.

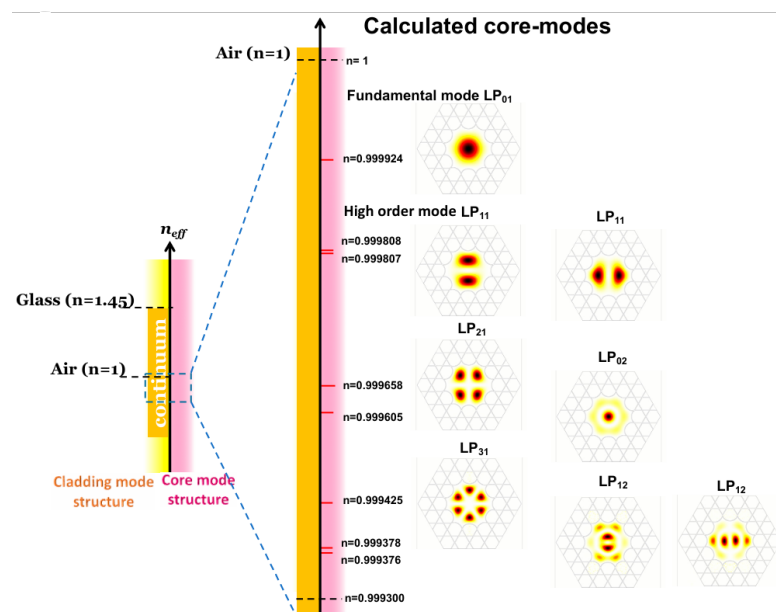


Figure 1.4: *Calculated modal structure of an IC-HCPCF, mapping the fundamental LP_{01} mode and higher-order modes against the continuous cladding modal spectrum.*

Fig. 1.4 illustrates this modal hierarchy. Higher-order modes (such as LP_{11} or LP_{02}) exist but experience much higher leakage. Their electromagnetic fields extend radially closer to the silica boundaries, which increases the spatial overlap with the cladding modes, and their non-zero

MD note: La frase va bene, ma varrebbe la pena esplicitare subito il perché, che non è lo stesso delle fibre a indice: in un core cavo non esiste un vero taglio modale. Tutti i modi sono leaky (Marcatili-Schmeltzer, che hai già in bibliografia come Marcatili1964), con perdita $\propto u_{mn}^2 \lambda^2 / R^3$, e rimpicciolire il core non elimina i modi di ordine superiore: li rende solo più dissipativi. È esattamente quello che scrivi correttamente più avanti ("supports a multimode continuum ... due to the attenuation of higher-order modes"), ma anticiparlo di una riga qui evita che il lettore pensi a un parametro V e a un cutoff che in un core cavo non c'è.

MD note: immagino avrai preso l'immagine da un paper, per cui ci vorrebbero i credits

azimuthal index (like $m = 1$ for the LP_{11} mode) reduces the phase mismatch. Thus, while the fiber inherently supports a multimode continuum, if properly designed it can behave as a single-mode waveguide over macroscopic distances due to the attenuation of higher-order modes [3].

MD note: dipende molto anche dall'iniezione, perché nell'iniezione il tuo modo viene scomposto nella base dei modi della fibra e se è già in un singolo modo (anche non fondamentale) ci rimane in prima approssimazione.

1.2 Electromagnetic Trapping of Neutral Atoms

1.2.1 The Magneto-Optical Trap

The Magneto-Optical Trap (MOT) is a technique used to simultaneously confine and cool neutral atoms. It relies on the combination of a position-dependent restoring force and a velocity-dependent damping force [6].

Spatial confinement is produced by a quadrupole magnetic field, generated by a pair of anti-Helmholtz coils. The field is zero at the center of the trap and grows linearly along each direction, with a gradient that induces a position-dependent Zeeman shift of the atomic energy levels. Three pairs of counter-propagating laser beams, red-detuned from the atomic resonance, are sent along the three orthogonal axes. Within each pair, the two beams carry opposite circular polarizations, σ^+ and σ^- , selected so that the beam pushing toward the center is the one brought into resonance by the local Zeeman shift. As an atom drifts away from the origin, the Zeeman shift brings it closer to resonance with the inward-propagating beam, producing a restoring radiation pressure that pushes the atom back toward the center [6]. A schematic representation of the MOT is shown in Fig. 1.5

The cooling mechanism operating inside the MOT is known as optical molasses [8]. It is generated by the same three pairs of counter-propagating beams used for confinement, when their action is considered in the absence of the magnetic field gradient. The beams are slightly red-detuned from the atomic resonance: when an atom moves, the laser beam opposing its trajectory is Doppler-shifted closer to resonance. The atom therefore absorbs more photons from the opposing beam than from the co-propagating one, resulting in a velocity-dependent friction force that viscously damps the atomic motion.

During this continuous molasses cooling, a competing heating mechanism arises from the spontaneous emission of photons. After absorbing a photon, the atom returns to its ground state by spontaneously re-emitting a photon in a random direction. Each emission imparts a small momentum kick (recoil) to the atom; this random walk in momentum space leads to a diffusion of the atomic velocities and heats the atomic cloud. The thermal equilibrium established between the viscous damping of the molasses (cooling) and the random recoils from spontaneous

MD typo: Questo titolo sfiora il margine destro di 39 pt nel layout finale (A4, margin=2.5cm): è il caso peggiore del capitolo, il doppio di "...Hollow-Core Optical Fibers". RISOLTO dal `\raggedright` aggiunto in `preamble.tex` (vedi la nota sul titolo 1.1.1). Stesso problema, e stesso fix, su "Coupling to the Motional ..." nel capitolo 1 e su "Upper Breadboard Setup and Conveyor Belt" nel capitolo 2.

MD note: Due osservazioni. (i) Va detto che sono forze MEDIE: quello che si osserva è una media su molti cicli di eccitazione e diseccitazione, resa possibile dall'isotropia dell'emissione spontanea e dall'anisotropia dell'assorbimento. Attorno alla media restano le fluttuazioni, che sono poi quelle che fissano il limite Doppler qualche riga più sotto: basta una subordinata, non serve riscrivere il paragrafo. (ii) Più importante: la forma "richiamo elastico più smorzamento" vale solo per piccoli spostamenti e basse velocità ($kv \ll \Gamma$ e $\mu'B'z/\hbar \ll \Gamma$). Fuori da quel regime la forza del MOT è fortemente non lineare e può perfino cambiare segno, quindi il limite di validità va dichiarato.

MD suggestion: io direi "a pair of coils in anti-Helmholtz configuration"

MD note: il campo è nullo al centro solo se era già nullo, per cui io specificherei "generated field"

MD note: Dentro il MOT il meccanismo di raffreddamento è il Doppler cooling (in pratica accompagnato dai meccanismi sub-Doppler). "Optical molasses" è invece il nome della configurazione a sei fasci SENZA gradiente di campo magnetico, quindi senza trappola: la melassa (Chu, 1985) è anteriore al MOT e non si definisce come "spegnere le bobine", è semplicemente la configurazione a campo nullo. Qui scriverei "is Doppler cooling", e poi che gli stessi fasci, in assenza di gradiente, costituiscono una optical molasses – che è già quello che dici nella frase successiva.

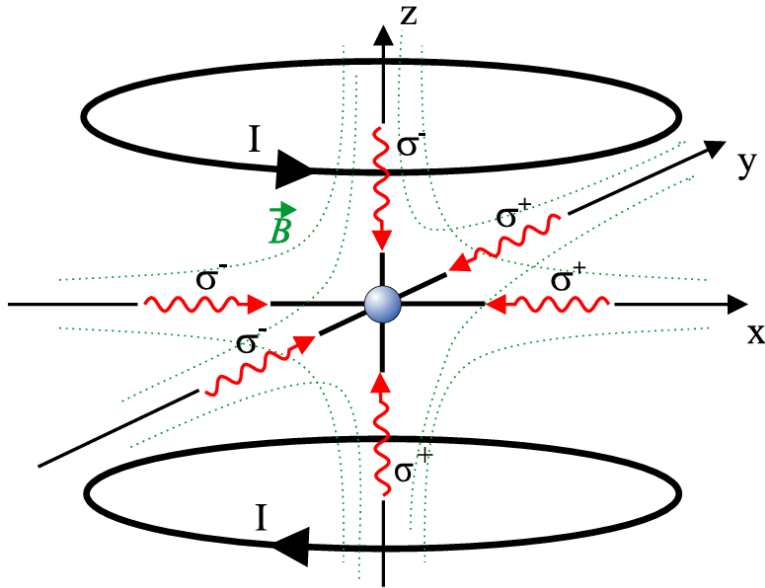


Figure 1.5: *Schematic representation of the Magneto-Optical Trap (MOT) configuration, illustrating the counter-propagating laser beams with alternating σ^+/σ^- polarizations and the anti-Helmholtz coils used to generate the magnetic quadrupole field. From [7]*

emission (heating) defines the Doppler temperature limit [8]:

$$T_D = \frac{\hbar\Gamma}{2k_B} \quad (1.6)$$

where $\hbar$ is the reduced Planck constant, Γ is the natural linewidth of the atomic transition, and k_B is the Boltzmann constant. This expression corresponds to the minimum achievable under Doppler cooling and is obtained for an optimal detuning $\Delta = -\Gamma/2$. For ^{87}Rb atoms on the D2 line, it corresponds to a temperature of approximately $146 \mu\text{K}$.

1.2.2 Polarization Gradient Cooling

While the MOT cools atoms down to the Doppler limit, further temperature reduction requires Polarization Gradient Cooling (PGC), commonly referred to as Sisyphus cooling. Two main configurations of PGC exist, depending on the relative polarizations of the counter-propagating beams: the $\text{lin}\perp\text{lin}$ geometry, in which the two beams have orthogonal linear polarizations, and the $\sigma^+\sigma^-$ geometry, in which the beams have opposite circular polarizations. The two configurations give rise to distinct polarization patterns and to correspondingly distinct cooling dynamics. In the following, the discussion is restricted to the $\text{lin}\perp\text{lin}$ case, which provides the most direct illustration of the Sisyphus mechanism [9].

The spatial interference of two counter-propagating beams with orthogonal linear polarizations generates a standing wave with a spatially varying polarization state. Over a distance of $\lambda/2$,

MD question: Il risultato è corretto, ed è esatto entro la teoria a due livelli, bassa intensità e basse velocità: la distribuzione stazionaria degli impulsi è gaussiana, quindi la temperatura è ben definita come STATO STAZIONARIO. Hai ragione che non è un equilibrio termodinamico, ma questa è una precisazione da fare in un inciso, non un motivo per indebolire l'affermazione, e non è "un ordine di grandezza". Ho verificato anche il numero: con $\Gamma/2\pi = 6.0666 \text{ MHz}$ viene $145.6 \mu\text{K}$, quindi "approximately $146 \mu\text{K}$ " va bene. Quello che manca davvero è il qualificatore: è il minimo PER UN ATOMO A DUE LIVELLI. Gli alcalini reali scendono sotto grazie ai gradienti di polarizzazione (Lett et al., 1988), che è esattamente l'argomento della tua sottosezione successiva: così com'è, la frase contraddice quello che scrivi subito dopo.

the local polarization cycles through linear, circular, and orthogonal linear states. For atoms with a degenerate ground state, the light shift (AC Stark shift) depends on the local polarization and on the specific Zeeman sublevel m_F . As an atom moves through this optical field, it climbs a potential hill created by the spatially varying light shift, converting its kinetic energy into potential energy [9].

Upon reaching the peak of the potential hill, the local polarization drives an optical pumping transition that transfers the atom into a lower-energy sublevel. The spontaneously emitted photon carries away the excess potential energy, leaving the atom at the minimum of a new potential valley. A schematic representation of this process is depicted in Fig. 1.6. This continuous cycle of ascending potential gradients and undergoing subsequent optical pumping dissipates the atom's kinetic energy, resulting in temperatures significantly below the Doppler limit.

MD note: "Upon reaching the peak" suona deterministico. L'affermazione corretta è che il RATE di pompaggio ottico è massimo dove è massimo il light shift, quindi l'atomo viene pompato con maggiore PROBABILITÀ vicino alla cima della collina, non necessariamente sulla cima. Basterebbe "the optical pumping rate is largest near the top of the hill, so the atom is most likely to be pumped there".

The lowest temperatures achievable through PGC are limited by the recoil energy associated with the emission of a single photon. Defining the recoil energy as $E_R = \hbar^2 k^2 / (2m)$, with k the photon wave vector and m the atomic mass, the definition for the corresponding recoil temperature is

$$T_R = \frac{\hbar^2 k^2}{2mk_B} = \frac{E_R}{k_B}. \quad (1.7)$$

Temperatures of the order of a few T_R represent the practical lower bound for PGC. At this scale, the thermal kinetic energy of the atom becomes comparable to the energy of a single photon recoil, and the Sisyphus cooling cycle can no longer extract energy efficiently without re-heating the atom through the spontaneous emission process itself. Reaching temperatures below this threshold requires sub-recoil cooling techniques.

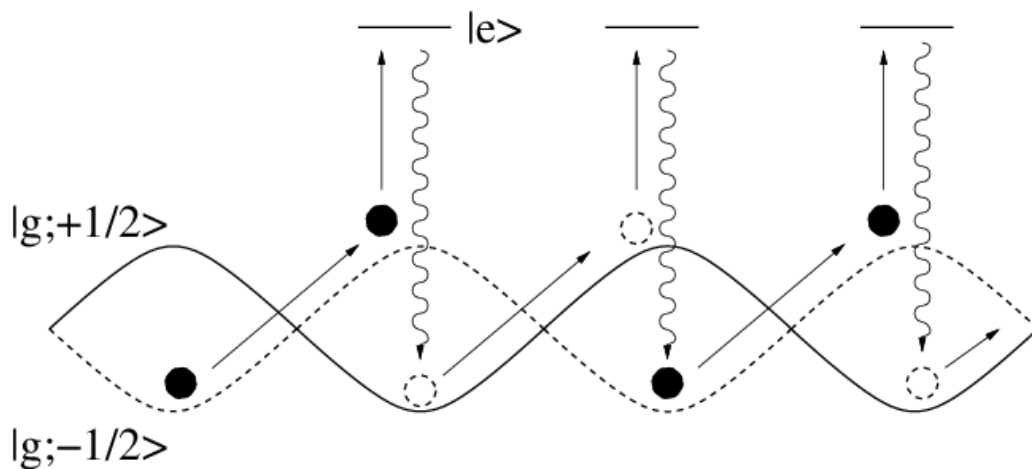


Figure 1.6: *Schematic representation of Polarization Gradient Cooling (Sisyphus cooling). The diagram illustrates the position-dependent light shifts of the ground-state Zeeman sublevels and the optical pumping process that dissipates the atom's kinetic energy.*

1.2.3 The Optical Dipole Trap

In contrast to the dissipative radiation-pressure forces that underlie the MOT, an optical dipole trap (ODT) confines neutral atoms in a nearly conservative potential produced by far-off-resonant light. The mechanism **relies on the interaction between the intensity gradient of the light field and the atomic dipole moment that the field itself induces** [10]. Because the optical dipole interaction is weak compared with the radiative forces used in a MOT, typical trap depths lie in the millikelvin range or below; atoms must therefore be pre-cooled (through the mechanisms described above) before they can be transferred into an ODT.

1.2.3.1 Oscillator model and semiclassical treatment

The essential features of the optical dipole force can be derived by treating the atom as a classical damped oscillator driven by a classical oscillating electric field. The laser field $\mathbf{E}(\mathbf{r}, t) = \hat{\mathbf{e}} \tilde{E}(\mathbf{r}) e^{-i\omega t} + \text{c.c.}$ induces a dipole moment $\mathbf{p}(\mathbf{r}, t) = \hat{\mathbf{e}} \tilde{p}(\mathbf{r}) e^{-i\omega t} + \text{c.c.}$ whose amplitude is proportional to the field amplitude through the complex atomic polarizability $\alpha(\omega)$,

$$\tilde{p} = \alpha(\omega) \tilde{E}. \quad (1.8)$$

The interaction potential of the induced dipole in the driving field is

$$U_{\text{dip}}(\mathbf{r}) = -\frac{1}{2} \langle \mathbf{p} \cdot \mathbf{E} \rangle = -\frac{1}{2\epsilon_0 c} \text{Re}(\alpha) I(\mathbf{r}), \quad (1.9)$$

where the angular brackets denote time averaging over the optical period, $I = 2\epsilon_0 c |\tilde{E}|^2$ is the field intensity, and the factor 1/2 accounts for the dipole being induced rather than permanent [10]. The potential is proportional to the real (dispersive) part of α , which describes the in-phase component of the dipole oscillation. The resulting dipole force

$$\mathbf{F}_{\text{dip}}(\mathbf{r}) = -\nabla U_{\text{dip}}(\mathbf{r}) = \frac{1}{2\epsilon_0 c} \text{Re}(\alpha) \nabla I(\mathbf{r}) \quad (1.10)$$

is conservative and proportional to the intensity gradient.

Concurrently, the driven oscillator absorbs power from the field and re-emits it as dipole radiation. The absorbed power

$$P_{\text{abs}}(\mathbf{r}) = \langle \dot{\mathbf{p}} \cdot \mathbf{E} \rangle = \frac{\omega}{\epsilon_0 c} \text{Im}(\alpha) I(\mathbf{r}) \quad (1.11)$$

is proportional to the imaginary (absorptive) part of α , describing the out-of-phase component of the dipole. Interpreting the absorption as a stream of photons of energy $\hbar\omega$, the corresponding

MD suggestion: Non è il gradiente a "interagire" con il dipolo: l'interazione è fra il dipolo indotto e il campo, $U_{\text{dip}} = -\frac{1}{2} \langle \mathbf{p} \cdot \mathbf{E} \rangle$, ed è il gradiente dell'intensità a dare la FORZA, non l'interazione. Le tue equazioni del potenziale di dipolo e della forza di dipolo (`eq:dipole_potential_general` e `eq:dipole_force`), due paragrafi più sotto, fanno esattamente questa distinzione, quindi la frase di apertura le contraddice. Riscriverei: "relies on the interaction of the light field with the dipole moment it induces in the atom; since the resulting potential is proportional to the intensity, the atom is drawn toward an intensity extremum".

spontaneous scattering rate is [10]

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{P_{\text{abs}}}{\hbar\omega} = \frac{1}{\hbar\epsilon_0 c} \text{Im}(\alpha) I(\mathbf{r}). \quad (1.12)$$

To obtain an explicit expression for $\alpha(\omega)$, the atom is first modeled in Lorentz's picture as an electron of mass m_e and charge $-e$ elastically bound to the core with eigenfrequency ω_0 , damped by radiative energy loss. Integration of the equation of motion $\ddot{x} + \Gamma_\omega \dot{x} + \omega_0^2 x = -eE(t)/m_e$ yields [10]

$$\alpha = \frac{e^2}{m_e} \frac{1}{\omega_0^2 - \omega^2 - i\omega\Gamma_\omega}, \quad (1.13)$$

where $\Gamma_\omega = e^2\omega^2/(6\pi\epsilon_0 m_e c^3)$ is the classical damping rate from Larmor's formula. In the semiclassical treatment the same functional form is recovered, the only modification being that the damping rate is no longer given by Larmor's formula but is determined by the quantum-mechanical dipole matrix element between ground and excited state [10]:

$$\Gamma = \frac{\omega_0^3}{3\pi\epsilon_0 \hbar c^3} |\langle e|\hat{\mu}|g\rangle|^2. \quad (1.14)$$

For the D lines of the alkali atoms Na, K, Rb, and Cs, the classical result of Eq. 1.13 agrees with the true decay rate to within a few percent. Expressing the polarizability in terms of this quantum-mechanical Γ gives [10]

$$\alpha(\omega) = 6\pi\epsilon_0 c^3 \frac{\Gamma/\omega_0^2}{\omega_0^2 - \omega^2 - i(\omega^3/\omega_0^2)\Gamma}. \quad (1.15)$$

MD note: Il rimando è sbagliato: l'equazione richiamata è la POLARIZZABILITÀ, non un tasso di decadimento (`eq:polarizability_lorentz`). L'affermazione di Grimm riguarda il tasso di smorzamento classico di Larmor Γ_ω , che definisci nella riga subito sotto quell'equazione. Va corretto il riferimento.

Substituting Eq. 1.15 into Eqs. 1.9 and 1.12 yields the general expressions [10]

$$U_{\text{dip}}(\mathbf{r}) = -\frac{3\pi c^2}{2\omega_0^3} \left(\frac{\Gamma}{\omega_0 - \omega} + \frac{\Gamma}{\omega_0 + \omega} \right) I(\mathbf{r}), \quad (1.16)$$

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{3\pi c^2}{2\hbar\omega_0^3} \left(\frac{\omega}{\omega_0} \right)^3 \left(\frac{\Gamma}{\omega_0 - \omega} + \frac{\Gamma}{\omega_0 + \omega} \right)^2 I(\mathbf{r}). \quad (1.17)$$

These expressions are valid for any driving frequency and contain two resonant contributions: the one at $\omega = \omega_0$ and the counter-rotating term resonant at $\omega = -\omega_0$. In most trapping experiments the laser is tuned close to ω_0 with detuning $\Delta \equiv \omega - \omega_0$ satisfying $|\Delta| \ll \omega_0$; the counter-rotating term can then be neglected in the rotating-wave approximation (RWA), and one may set $\omega/\omega_0 \simeq 1$. Equations 1.16–1.17 then reduce to [10]

$$U_{\text{dip}}(\mathbf{r}) = \frac{3\pi c^2}{2\omega_0^3} \frac{\Gamma}{\Delta} I(\mathbf{r}), \quad (1.18)$$

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{3\pi c^2}{2\hbar\omega_0^3} \left(\frac{\Gamma}{\Delta} \right)^2 I(\mathbf{r}). \quad (1.19)$$

1.2.3.2 Quantum-mechanical picture

The same potential arises in the quantum description as an energy-level shift induced by the off-resonant field. The effect of far-detuned laser light can be treated as a perturbation of second order in the electric field, linear in the intensity. Within the dressed-atom approach, the unperturbed states of the combined atom–photon system are considered: in the ground state the atom has zero internal energy and the field carries $n\hbar\omega$, so $E_i = n\hbar\omega$; after absorption of one photon the atom is in the excited state with internal energy $\hbar\omega_0$ and the field carries $(n-1)\hbar\omega$, giving $E_j = \hbar\omega_0 + (n-1)\hbar\omega = -\hbar\Delta + n\hbar\omega$. The energy denominator is therefore $E_i - E_j = \hbar\Delta$. For low saturation, the second-order shift of the ground state due to the coupling with the excited state $|e\rangle$ through the dipole operator $\hat{\mu}$ reads [10]

$$\Delta E = \frac{|\langle e|\hat{\mu}|g\rangle|^2}{\hbar\Delta} |\tilde{E}|^2 = \frac{3\pi c^2}{2\omega_0^3} \frac{\Gamma}{\Delta} I(\mathbf{r}), \quad (1.20)$$

where the dipole matrix element has been replaced by Γ via Eq. 1.14. This perturbative result coincides with the semiclassical dipole potential of Eq. 1.18 [10]: the AC Stark shift of the ground state is the dipole potential, while the excited state experiences the opposite shift. Since in the low-saturation regime the atom resides predominantly in the ground state, the light-shifted ground state acts as the effective conservative potential for the atomic motion. A spatially varying intensity, such as the Gaussian profile of a focused beam, produces a position-dependent shift and hence a trapping potential, as illustrated in Fig. 1.7.

MD suggestion: io userei "framework"

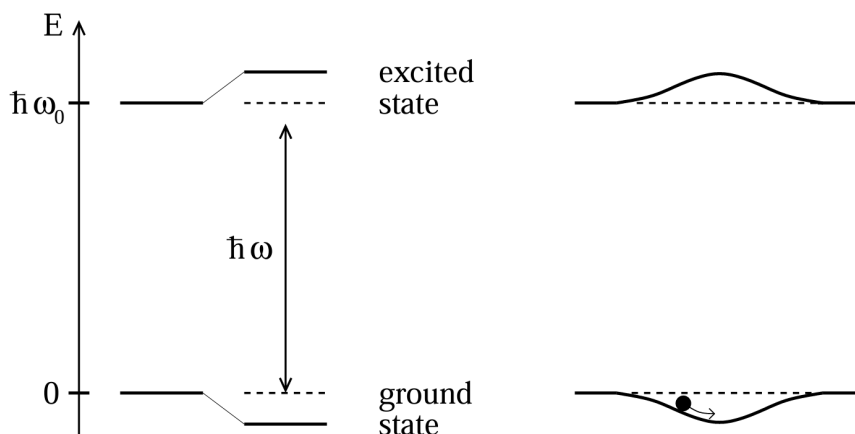


Figure 1.7: *Light shifts for a two-level atom. Left: red-detuned light ($\Delta < 0$) shifts the ground state down and the excited state up by equal amounts. Right: a spatially inhomogeneous field such as a Gaussian laser beam produces a ground-state potential well in which an atom can be trapped.*

The sign of the detuning determines the trapping geometry. For a red-detuned field ($\Delta < 0$) the ground state is shifted downward, yielding an attractive potential that confines atoms near intensity maxima; for a blue-detuned field ($\Delta > 0$) the shift is positive and atoms are pushed toward intensity minima, where spontaneous scattering is also reduced.

Combining Eqs. 1.18–1.19 gives the relation

$$\hbar\Gamma_{\text{sc}} = \frac{\Gamma}{\Delta} U_{\text{dip}}, \quad (1.21)$$

a direct consequence of the link between the absorptive and dispersive response of the oscillator [10]. Since the dipole potential scales as I/Δ while the scattering rate scales as I/Δ^2 , a deep potential can be maintained at comparatively low scattering, and thus low heating and decoherence, by using high intensity together with large detuning.

1.2.3.3 Multi-level atoms and the alkali *D*-lines

Real alkali atoms possess a fine and hyperfine structure that are neglected in the two-level model. The state-dependent dipole potential is then obtained from second-order time-independent perturbation theory. For a non-degenerate ground state $|g_i\rangle$, the energy shift is [10]

$$\Delta E_i = \sum_{j \neq i} \frac{|\langle e_j | \hat{\mu} | g_i \rangle|^2}{E_i - E_j} |\tilde{E}|^2, \quad (1.22)$$

where the sum runs over all electronically excited states $|e_j\rangle$. By the Wigner–Eckart theorem, each dipole matrix element factorizes into a reduced matrix element $\|\mu\|$, depending only on the orbital wavefunctions, and a real transition coefficient c_{ij} encoding the angular-momentum geometry and the laser polarization, $\mu_{ij} = c_{ij}\|\mu\|$. Since $\|\mu\|$ is directly related to Γ through Eq. 1.14, the ground-state shift becomes [10]:

$$\Delta E_i = \frac{3\pi c^2 \Gamma}{2\omega_0^3} I(\mathbf{r}) \sum_j \frac{c_{ij}^2}{\Delta_{ij}}, \quad (1.23)$$

with Δ_{ij} the detuning from the $i \rightarrow j$ transition. The dipole potential is therefore a sum over all coupled excited states, weighted by their line-strength factors c_{ij}^2 and inverse detunings.

For alkali metals the dominant contributions come from the D_1 ($nS_{1/2} \rightarrow nP_{1/2}$) and D_2 ($nS_{1/2} \rightarrow nP_{3/2}$) fine-structure lines [10]; higher-lying transitions lie tens of THz away and contribute negligibly in the near-infrared trapping regime used in this work. Under the assumption that the optical detuning is large compared with the excited-state hyperfine splitting, so that the resolved hyperfine components of each fine-structure line can be replaced by their weighted center, the line-strength sum rules allow Eq. 1.23 to be evaluated in closed form for a ground

state $|F, m_F\rangle$ [10]:

$$U_{\text{dip}}(\mathbf{r}) = \frac{\pi c^2 \Gamma}{2\omega_0^3} \left(\frac{2 + \mathcal{P} g_F m_F}{\Delta_{2,F}} + \frac{1 - \mathcal{P} g_F m_F}{\Delta_{1,F}} \right) I(\mathbf{r}), \quad (1.24)$$

where g_F is the Landé factor, $\mathcal{P}$ describes the laser polarization ($\mathcal{P} = 0$ for linear, $\mathcal{P} = \pm 1$ for $\sigma^\pm$), and $\Delta_{2,F}$, $\Delta_{1,F}$ are the detunings from the centers of the D_2 and D_1 transitions, respectively (Fig. 1.8).

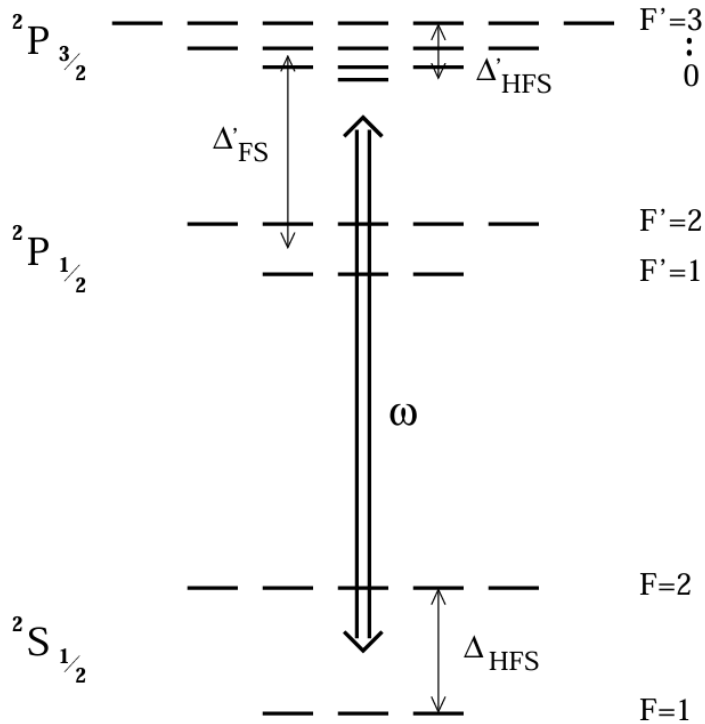


Figure 1.8: *Level scheme of an alkali atom (nuclear spin $I = 3/2$, as in ^{87}Rb) relevant to the dipole-potential calculation. The fine-structure doublet D_1 ($nS_{1/2} \rightarrow nP_{1/2}$) and D_2 ($nS_{1/2} \rightarrow nP_{3/2}$) couples the ground manifold $nS_{1/2}$ to the excited $nP_{1/2}$ and $nP_{3/2}$ manifolds; $\Delta_{1,F}$ and $\Delta_{2,F}$ denote the detunings of the trapping laser from the centers of the two lines. After [10].*

The structure of Eq. 1.24 follows from the line-strength factors of the two transitions. For linear polarization, symmetry requires both electronic ground states $m_J = \pm 1/2$ to be shifted equally; after coupling to the nuclear spin, all magnetic sublevels of a given F remain degenerate, with line-strength factors $2/3$ for the D_2 line and $1/3$ for the D_1 line [10]. These factors appear as the constants 2 and 1 in the numerators of Eq. 1.24 (the common factor $1/3$ being absorbed into the prefactor). For circular polarization, the m_J degeneracy is lifted: the line-strength factors become $(2 \pm g_F m_F)/3$ for D_2 and $(1 \mp g_F m_F)/3$ for D_1 , where the substitution $m_J \rightarrow \frac{1}{2} g_F m_F$ (with $g_J = 2$ for alkali atoms) follows from the analogy with the linear Zeeman effect in weak magnetic fields. This m_F -dependent contribution is the vector light shift, which acts as a fictitious magnetic field along the propagation axis and lifts the degeneracy of the magnetic sublevels. For this reason, linearly polarized light is generally preferred when homogeneous,

state-insensitive confinement is required [10].

For the photon scattering rate, the same line-strength factors enter as for the dipole potential, since absorption and light shifts are governed by the same transition matrix elements. For linear polarization one obtains [10]

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{\pi c^2 \Gamma^2}{2 \hbar \omega_0^3} \left(\frac{2}{\Delta_{2,F}^2} + \frac{1}{\Delta_{1,F}^2} \right) I(\mathbf{r}). \quad (1.25)$$

The general expression of Eq. 1.24 reduces to the two-level result of Eq. 1.18 in two limiting regimes. When the detuning is much larger than the fine-structure splitting ($|\Delta| \gg |\Delta_{\text{FS}}|$, with $\Delta_{\text{FS}} = \omega_{D_2} - \omega_{D_1}$), the two detunings become nearly equal, $\Delta_{1,F} \simeq \Delta_{2,F} \simeq \Delta$. For linear polarization ($\mathcal{P} = 0$) the numerators add to $2 + 1 = 3$, the total oscillator strength of the D -doublet; absorbing this factor into an effective linewidth Γ_{eff} , Eq. 1.24 takes the two-level form of Eq. 1.18, with Δ measured from the weighted center of the doublet. In the opposite limit, where the laser is tuned close to one line ($|\Delta_{i,F}| \ll |\Delta_{j,F}|$), only the nearest transition contributes appreciably and the sum collapses to a single term, again yielding the two-level form. In both limits, linear polarization suppresses the vector light shift, so the resulting potential is independent of m_F and is identical in form to the two-level dipole potential. If the detuning additionally exceeds the ground-state hyperfine splitting ($|\Delta| \gg \Delta_{\text{HFS}}$), all sub-states of the electronic ground manifold are shifted by the same amount and the potential becomes completely independent of both m_F and F . This justifies treating the atom as an effective two-level system throughout this work, where far-detuned, linearly polarized beams are used in all trapping configurations.

1.3 Optical Conveyor Belt

The optical dipole trap discussed in the previous section provides a static conservative potential in which atoms are confined near the focus of a single laser beam. Transporting the trapped cloud over macroscopic distances requires a different architecture, in which the position of the potential minima can be controlled dynamically. The "optical conveyor belt" fulfills this requirement by replacing the single beam with two counter-propagating, phase-coherent beams: their interference generates a standing wave whose nodes and antinodes can be set into motion by imposing a controlled frequency difference between the two arms. This section derives the geometry of the standing-wave potential, the kinematics of the moving lattice, and the acceleration limits that bound adiabatic transport.

MD note: "Phase-coherent" da solo non basta: i due fasci devono anche essere CO-POLARIZZATI perché si formi un reticolo di intensità. Con polarizzazioni ortogonali l'intensità totale è uniforme e quello che si ottiene è un gradiente di polarizzazione, non un'onda stazionaria di intensità: sarebbe una melassa lin-perp-lin, non un conveyor belt. È anche un requisito di allineamento reale in laboratorio, quindi vale la mezza riga.

1.3.1 Interference of Counter-Propagating Gaussian Beams and the Stationary Lattice

The fundamental mechanism of the optical conveyor belt relies on the periodic intensity pattern generated by the interference of two counter-propagating laser beams [7]. The resulting standing wave acts as a one-dimensional optical lattice, imposing a tight spatial confinement on atoms via the optical dipole force.

MD typo: Questo titolo sfiora di 22 pt nel PDF di revisione, che ha i margini larghi, ma nel layout FINALE (A4, margin=2.5cm) sta dentro senza problemi: verificato compilando entrambe le geometrie. Quindi qui non c'era niente da correggere nel testo; in ogni caso il `\raggedright` aggiunto in `preamble.tex` (vedi la nota sul titolo 1.1.1) copre anche questo caso.

Assuming two coherent Gaussian beams in the fundamental transverse mode propagating along the z -axis, the respective electric fields can be modeled as follows. The first beam, propagating towards $+z$ with angular frequency ω_1 , is described by:

$$E_1(z, \rho, t) = E_0 \frac{w_0}{w(z)} \exp\left(-\frac{\rho^2}{w^2(z)}\right) \exp(i(kz - \omega_1 t + \phi(z))) \quad (1.26)$$

where E_0 denotes the peak field amplitude, $k = 2\pi/\lambda$ the optical wavenumber, $\phi(z)$ the Gouy phase shift, and $\rho = \sqrt{x^2 + y^2}$ the radial coordinate. The beam radius $w(z)$ evolves along the propagation axis according to:

$$w^2(z) = w_0^2 \left(1 + \frac{z^2}{z_R^2}\right), \quad (1.27)$$

with w_0 the waist at the focal plane and $z_R = \pi w_0^2/\lambda$ the Rayleigh length. The second field, counter-propagating towards $-z$ at frequency ω_2 , is given by:

$$E_2(z, \rho, t) = E_0 \frac{w_0}{w(z)} \exp\left(-\frac{\rho^2}{w^2(z)}\right) \exp(i(-kz - \omega_2 t - \phi(z))). \quad (1.28)$$

MD suggestion: Due cose. Il valore di $\phi(z)$ non lo dai mai: è $\arctan(z/z_R)$, e basta scriverlo. Soprattutto, nelle Eq. dei due fasci non compare alcun termine di curvatura del fronte d'onda, $\exp(ik\rho^2/2R(z))$: più avanti scrivi "dropping wave-front curvature and Gouy phase", ma la curvatura non c'era da eliminare. O la aggiungi nell'espressione generale, o cambi quella frase in modo che si riferisca solo alla fase di Gouy.

To determine the local intensity profile for degenerate frequencies ($\omega_1 = \omega_2 = \omega$), the coherent superposition $E_{tot} = E_1 + E_2$ is evaluated. Restricting the analysis to the spatial region localized around the focal point ($z \ll z_R$), the variation of the beam waist and the Gouy phase shift become negligible. The superimposed electric field simplifies to:

$$E_{tot}(z, \rho, t) \approx E_0 \frac{w_0}{w(z)} \exp\left(-\frac{\rho^2}{w^2(z)}\right) e^{-i\omega t} [e^{ikz} + e^{-ikz}]. \quad (1.29)$$

Applying Euler's relation, the spatial interference manifests as a real cosine envelope $2\cos(kz)$. The effective optical intensity $I(z, \rho)$ experienced by the atoms is proportional to the time-averaged squared amplitude of the field, $\langle |E_{tot}|^2 \rangle$, which yields a stationary standing wave:

$$I(z, \rho) = I_{\max} \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(kz). \quad (1.30)$$

The peak intensity $I_{\max} = 4P/(\pi w_0^2)$ follows from the total optical power P distributed across the two beams. **Each beam carries power $P/2$ and has a peak intensity $2(P/2)/(\pi w_0^2) = P/(\pi w_0^2)$;** the additional factor of 4 in $I_{\max}$ originates from the constructive interference at the antinodes, where the two field amplitudes add in phase.

In the far-detuned regime, where the laser frequency is significantly shifted from any atomic resonance, the resulting dipole force is conservative. The optical potential energy $U(\rho, z)$ is therefore directly proportional to the local intensity distribution:

$$U(\rho, z) = U_0 \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(kz), \quad (1.31)$$

where U_0 defines the maximum depth of the individual potential wells, with $U_0 < 0$ for a red-detuned, attractive trap.

The harmonic spatial modulation introduced by the $\cos^2(kz)$ term imposes a longitudinal periodicity, organizing the optical potential into a one-dimensional lattice of trapping sites with a lattice constant of $\lambda/2$.

Within a potential well, at low temperature, the atomic motion is restricted to a small region around the trap minimum at $z = 0$ and $\rho = 0$, allowing the harmonic approximation. Applying a second-order Taylor expansion to Eq. (1.31) using $\cos^2(kz) \approx 1 - (kz)^2$ and $\exp(-2\rho^2/w_0^2) \approx 1 - 2\rho^2/w_0^2$, the potential takes the quadratic form

$$U(\rho, z) \approx U_0 \left(1 - \frac{2\rho^2}{w_0^2}\right) (1 - k^2 z^2) \approx U_0 - U_0 k^2 z^2 - U_0 \frac{2\rho^2}{w_0^2}. \quad (1.32)$$

Equating these leading-order restoring terms to the classical energies of a harmonic oscillator, $\frac{1}{2}\kappa_z z^2$ and $\frac{1}{2}\kappa_{rad}\rho^2$, yields the effective spring constants $\kappa_z = 2|U_0|k^2$ and $\kappa_{rad} = 4|U_0|/w_0^2$. The

MD note: Qui stai assumendo implicitamente uno splitting bilanciato. Se i due bracci non hanno la stessa potenza, l'intensità è $I_1 + I_2 + 2\sqrt{I_1 I_2} \cos(2kz)$ e il contrasto del reticolo diventa $2\sqrt{I_1 I_2}/(I_1 + I_2) < 1$: i minimi non vanno più a zero e la profondità utile della buca cala. Vale la pena dirlo in una riga, perché tutta l'efficienza di trasporto dipende dalla profondità, e nel setup reale il braccio di ritorno è quasi sempre più debole.

characteristic axial and radial oscillation frequencies therefore read:

$$\Omega_z = \sqrt{\frac{2|U_0|k^2}{m}}, \quad \Omega_{rad} = \sqrt{\frac{4|U_0|}{mw_0^2}}. \quad (1.33)$$

These characteristic frequencies establish the dynamical timescales of the system and set the bound within which external parameters can be varied while preserving adiabaticity.

1.3.2 Geometry of the Trapping Potential

The ratio of the two oscillation frequencies exhibits a geometric dependence, independent of the overall trap depth U_0 :

$$\frac{\Omega_z}{\Omega_{rad}} = \frac{kw_0}{\sqrt{2}} = \frac{\sqrt{2}\pi w_0}{\lambda}. \quad (1.34)$$

In typical experimental configurations the beam waist exceeds the optical wavelength ($w_0 \gg \lambda$), so that the longitudinal confinement dominates over the transverse confinement ($\Omega_z \gg \Omega_{rad}$). The standing wave then imposes quasi-two-dimensional potential wells with a strongly anisotropic, disc-shaped geometry: along the z -axis the atomic motion is localized to a fraction of λ , while the transverse motion retains a comparatively broad spatial extent. This anisotropy suppresses tunneling between adjacent lattice sites while leaving the transverse dynamics only weakly confined. A schematic representation of the resulting disc-shaped potential wells is shown in Fig. 1.9.

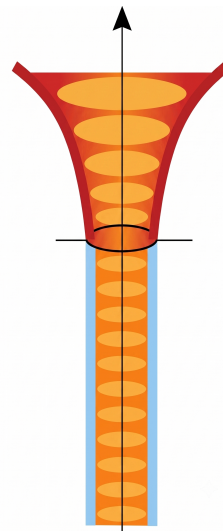


Figure 1.9: *The strongly anisotropic, disc-shaped potential wells of the one-dimensional optical lattice.*

1.3.3 Kinematics of the Moving Standing Wave

Translating the stationary lattice into an active transport potential requires inducing a macroscopic translation of the interference pattern. This is achieved by imposing a controlled frequency difference $\Delta\nu$ between the two counter-propagating laser modes. The dynamic behavior can be derived by applying the detuning either symmetrically across both beams or asymmetrically to a single beam. In both configurations, the coherent superposition of the fields is resolved using the sum-to-product identity $\cos A + \cos B = 2 \cos\left(\frac{A+B}{2}\right) \cos\left(\frac{A-B}{2}\right)$.

Symmetric detuning. Consider the case in which the detuning is distributed symmetrically, shifting the optical frequencies to $\nu_1 = \nu + \Delta\nu/2$ and $\nu_2 = \nu - \Delta\nu/2$. The corresponding angular frequencies become $\omega_1 = \omega + \pi\Delta\nu$ and $\omega_2 = \omega - \pi\Delta\nu$. Evaluating the scalar electric fields near

MD note: Attribuzione sbagliata: il tunneling fra siti adiacenti non è controllato dal rapporto di anisotropia Ω_z/Ω_{rad} , ma dalla PROFONDITÀ del reticolo in unità di rinculo, $|U_0|/E_R$, che fissa la larghezza di banda di Bloch. Un reticolo molto anisotropo ma poco profondo lascia passare il tunneling senza problemi. Riscriverei attribuendolo alla profondità, e lasciando all'anisotropia solo quello che le compete, cioè la forma a disco.

the focal region (dropping wavefront curvature and Gouy phase), the two beams are expressed as real functions:

$$E_1(z, t) = E_0(z, \rho) \cos(kz - \omega t - \pi\Delta\nu t), \quad (1.35)$$

$$E_2(z, t) = E_0(z, \rho) \cos(-kz - \omega t + \pi\Delta\nu t) = E_0(z, \rho) \cos(kz + \omega t - \pi\Delta\nu t). \quad (1.36)$$

Superposing the two fields, $E_{tot} = E_1 + E_2$, and mapping the arguments to $A = kz - \omega t - \pi\Delta\nu t$ and $B = kz + \omega t - \pi\Delta\nu t$, the sum-to-product identity yields

$$E_{tot}(z, t) = 2E_0(z, \rho) \cos(kz - \pi\Delta\nu t) \cos(-\omega t). \quad (1.37)$$

Because the atomic motion does not follow the rapidly oscillating optical carrier, the interaction can be averaged over one optical cycle, reducing the $\cos^2(-\omega t)$ term to a constant factor of 1/2. The effective intensity, and by extension the conservative trapping potential $U(z, \rho, t)$, is governed by the slowly varying spatial envelope. The static potential thus evolves into a moving periodic lattice:

$$U(z, \rho, t) = U_0 \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(\pi\Delta\nu t - kz). \quad (1.38)$$

Setting $\Delta\nu = 0$ recovers the stationary lattice structure.

Single-beam detuning. In laboratory implementations it is generally simpler to introduce the frequency offset into a single arm. Defining the unshifted frequency as $\nu_1 = \nu$ and the detuned frequency as $\nu_2 = \nu + \Delta\nu$ (yielding angular frequencies $\omega_1 = \omega$ and $\omega_2 = \omega + 2\pi\Delta\nu$), the interacting fields are

$$E_1(z, t) = E_0(z, \rho) \cos(kz - \omega t), \quad (1.39)$$

$$E_2(z, t) = E_0(z, \rho) \cos(-kz - (\omega + 2\pi\Delta\nu)t) = E_0(z, \rho) \cos(kz + \omega t + 2\pi\Delta\nu t). \quad (1.40)$$

Applying the sum-to-product identity with $A = kz - \omega t$ and $B = kz + \omega t + 2\pi\Delta\nu t$ factors the superposition:

$$E_{tot}(z, t) = 2E_0(z, \rho) \cos(kz + \pi\Delta\nu t) \cos(\omega t + \pi\Delta\nu t). \quad (1.41)$$

Upon time-averaging the fast optical component $\cos^2(\omega t + \pi\Delta\nu t) \rightarrow 1/2$, the resulting effective potential is

$$U(z, \rho, t) = U_0 \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(kz + \pi\Delta\nu t). \quad (1.42)$$

This expression coincides, up to an overall sign in the time argument of the envelope, with Eq. (1.38), confirming that an asymmetric detuning imposed on a single beam produces the same effect as a symmetrically distributed detuning.

The macroscopic velocity of the interference pattern can be understood by considering a moving

MD note: Il segno non è cosmetico: inverte la DIREZIONE di trasporto. Nel caso simmetrico l'involuppo è $\cos^2(\pi\Delta\nu t - kz)$ e il reticolo va verso $+z$; qui è $\cos^2(kz + \pi\Delta\nu t)$ e va verso $-z$. E la differenza non sta nel fatto che il detuning sia simmetrico o su un solo braccio: sta in QUALE braccio porta la frequenza più alta. Nel primo caso è il fascio che va verso $+z$, nel secondo quello che va verso $-z$. La regola generale, che vale in entrambi i casi, è che il reticolo si muove nel verso di propagazione del fascio a frequenza MAGGIORE, con $|v| = \lambda\Delta\nu/2$. Se la scrivi così, l'affermazione "produces

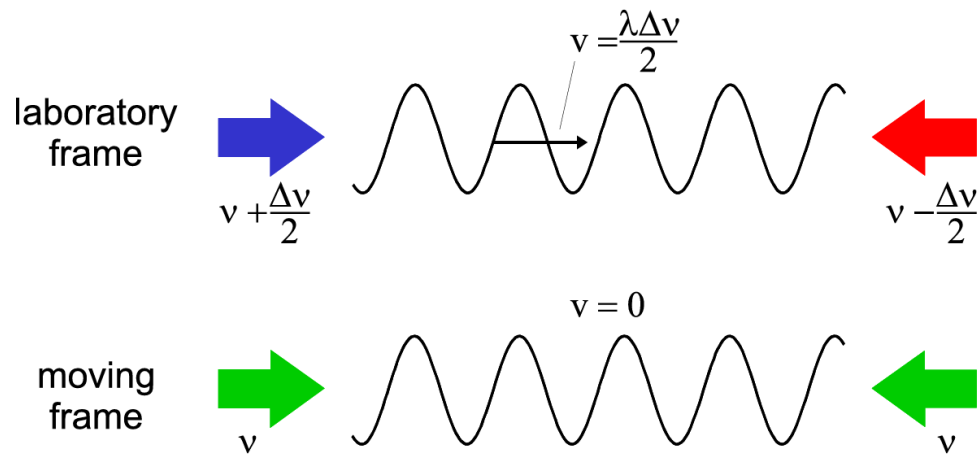


Figure 1.10: *Kinematics of the optical conveyor belt: a mutual detuning $\Delta\nu$ produces a moving standing wave. In the moving reference frame both beams are doppler shifted by the same amount [7].*

reference frame. In a coordinate system translating along the z -axis with velocity v , the Doppler effect causes a red shift of the co-propagating beam and a blue shift of the counter-propagating beam. There exists a specific reference frame in which these Doppler shifts exactly compensate for the frequency difference $\Delta\nu$ imposed in the laboratory frame. In this system, the two beams have identical frequencies, and the standing wave appears stationary [7].

The velocity can also be derived directly in the laboratory frame by tracking a point of constant intensity, i.e. by setting the phase argument of the moving envelope to a constant value, $kz \pm \pi\Delta\nu t = \text{const.}$ Taking the time derivative yields $k dz/dt \pm \pi\Delta\nu = 0$. Substituting $k = 2\pi/\lambda$ and identifying the transport velocity as $v = dz/dt$ gives

$$v = \frac{\lambda\Delta\nu}{2}. \quad (1.43)$$

1.3.4 Trap-Depth Scaling and Adiabatic Compression

The dimensional properties of the trap scale dynamically when optical parameters are varied, for instance during adiabatic compression in which the beam waist is tightened towards w_0 . Under constant optical power P , the trap depth obeys $U_0 \propto I_{\text{max}} \propto P/w_0^2$. Combining this scaling with the results of Eq. (1.33) gives the behavior of the trapping frequencies:

$$\Omega_z \propto \sqrt{U_0} \propto \frac{1}{w_0}, \quad \Omega_{\text{rad}} \propto \frac{\sqrt{U_0}}{w_0} \propto \frac{1}{w_0^2}. \quad (1.44)$$

The quadratic dependence of Ω_{rad} , compared to the linear dependence of Ω_z , induces a deformation during focusing: the anisotropy ratio $\Omega_z/\Omega_{\text{rad}}$ scales directly with w_0 , so the radial

confinement tightens faster than the axial confinement and the aspect ratio of the disc-shaped wells changes during compression.

Adiabatic temperature scaling. Provided that the variation of the trap depth remains slow compared to the inverse characteristic frequencies, the action $J \propto E/\Omega$ is an adiabatic invariant of the harmonic motion [11]. Modeling the mean thermal energy via the equipartition theorem ($E \propto k_B T$), this invariance implies that along each independent degree of freedom

$$\frac{T}{\Omega} = \text{const.} \quad (1.45)$$

Because Ω_z and Ω_{rad} scale at different rates with w_0 , an initially isotropic thermal distribution evolves into an anisotropic one: adiabatic compression increases the transverse temperature relative to the axial temperature.

Lamb–Dicke parameter. The axial behavior of the potential also affects the applicability of advanced laser-cooling mechanisms. The ground-state spatial width of the atomic wavepacket along the z -axis is

$$x_0 = \sqrt{\frac{\hbar}{2m\Omega_z}}, \quad (1.46)$$

and the parameter describing the coupling of this motional state to a resonant cooling field of wavenumber $k_c = 2\pi/\lambda_c$ is the Lamb–Dicke parameter

$$\eta = k_c x_0 = k_c \sqrt{\frac{\hbar}{2m\Omega_z}}. \quad (1.47)$$

The Lamb–Dicke regime provides the basis for the EIT-cooling treatment developed in Section 1.4.

1.3.5 Dynamics in the Accelerated Potential

Transporting a trapped atom between two spatial positions requires a profile of continuous acceleration followed by symmetric deceleration. This is achieved by applying a linear temporal ramp to the beat frequency $\Delta\nu(t)$.

Transforming the Hamiltonian into the non-inertial frame of the accelerating lattice, an atom subject to an acceleration a experiences a fictitious force $-ma$. The addition of this linear term along the optical axis modifies the effective potential:

$$U_{\text{eff}}(z') = U_0 \cos^2(kz') + maz', \quad (1.48)$$

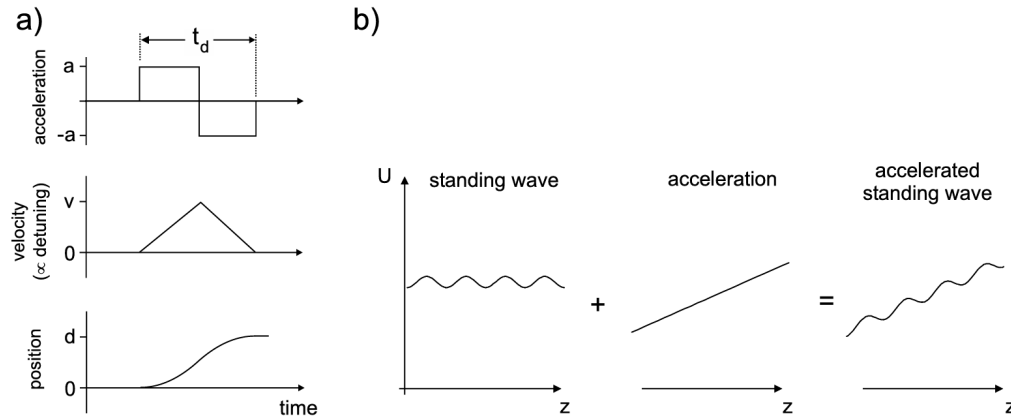


Figure 1.11: *In the frame co-moving with the accelerated lattice, the periodic potential is superimposed with a linear gradient, resulting in a tilted washboard landscape [7].*

where z' is the coordinate in the co-moving frame and $U_0 < 0$ denotes a red-detuned trap. The linear term breaks the symmetry of the periodic profile, lowering the potential barrier in the direction of the fictitious force. Stationary minima of U_{eff} exist provided the equation $dU_{\text{eff}}/dz' = 0$ admits real solutions corresponding to local minima. Differentiating yields

$$\frac{dU_{\text{eff}}(z')}{dz'} = -kU_0 \sin(2kz') + ma = 0 \quad \implies \quad ma = kU_0 \sin(2kz'). \quad (1.49)$$

Since $|\sin(2kz')| \leq 1$, real solutions require $|ma| \leq |kU_0|$. As $|a|$ approaches this limit, the local minimum and the adjacent maximum merge into a single inflection point, causing the trapping barrier to vanish completely and the atom to escape. **The threshold acceleration for a particle with zero kinetic energy is therefore:**

$$a_0 = \frac{k|U_0|}{m}. \quad (1.50)$$

This theoretical bound assumes a particle at absolute zero temperature. For a thermal cloud, the effective potential barrier $\Delta U = U_{\text{max}} - U_{\text{min}}$ decreases with acceleration, causing atoms with non-zero kinetic energy to escape at values significantly below a_0 . Furthermore, the local trap frequency approaches zero ($\Omega \rightarrow 0$) as $a \rightarrow a_0$. These factors impose stringent constraints on the acceleration profiles in optical conveyor belt operations to minimize thermal loss and maintain the adiabatic confinement of the atomic wavepacket.

MD note: Giusto, ma è un doppio best case e converrebbe dirlo. Primo: nell'Eq. del potenziale inclinato usi U_0 nudo, senza l'involuppo gaussiano $w_0^2/w^2(z)$ e senza il fattore radiale, quindi a_0 vale sull'asse e al fuoco. Un atomo fuori asse, o lontano dal fuoco, vede una buca meno profonda e sfugge a un'accelerazione minore. Secondo: a temperatura finita gli atomi superano la barriera ridotta prima che questa si annulli, quindi in pratica si sta ben sotto a_0 . Vale una riga, perché è il numero che poi limita davvero il tempo di trasporto.

1.4 Electromagnetically Induced Transparency Cooling

1.4.1 Introduction to EIT Cooling

The preparation of trapped atoms in their motional ground state is a fundamental prerequisite for high-fidelity quantum information processing and the realization of strongly coupled atom-photon systems. Resolved-sideband cooling is effective for this task, but it imposes the restriction of the strong-confinement condition: the natural linewidth of the atomic transition γ must be much smaller than the harmonic trap frequency ν ($\gamma \ll \nu$) [12]. This requirement is difficult to fulfill in shallow or low-frequency traps, where the sidebands are not spectrally resolved. Electromagnetically Induced Transparency (EIT) cooling overcomes this limitation by exploiting quantum interference in a multi-level atomic structure [12, 13]. It achieves ground-state cooling without requiring strong confinement; the relevance of this feature becomes clear when the cooling stage is integrated into a sequence that involves transport and tight spatial confinement.

MD suggestion: Attenzione al riuso dei simboli fra sezioni. Qui ν è la frequenza di trappola, ma nella sezione sul conveyor belt ν è la frequenza ottica dei fasci e $\Delta\nu$ il battimento: sono tre cose diverse con lo stesso simbolo nello stesso capitolo. Stessa cosa per la larghezza naturale, che qui è γ e nella sezione sulla trappola di dipolo è Γ . Sceglierei ω_{trap} (o ν_{trap}) qui, e userei un solo simbolo per la larghezza in tutto il capitolo.

In the experimental protocol considered in this work, atoms are first cooled in a magneto-optical trap, transferred to an optical dipole trap, and then transported into the hollow core of a photonic crystal fiber by means of an optical conveyor belt. The transport itself is a source of heating, the transverse compression required to match the fiber mode increases the trap frequencies and raises the transverse temperature. By the time the atoms reach the fiber core, their temperature is significantly higher, and re-cooling is required before any precision experiment can be performed. In this section, all frequencies and detunings are expressed as angular frequencies in units of rad/s, and the corresponding linear frequencies in Hz are obtained by dividing by 2π .

MD typo: Virgola che unisce due proposizioni indipendenti (comma splice). Mettere i due punti o il punto e virgola: "The transport itself is a source of heating: the transverse compression required to match the fiber mode increases the trap frequencies and raises the transverse temperature."

1.4.2 The Three-Level Λ System and Coherent Population Trapping

The theoretical framework of EIT cooling is based on a three-level atomic system in a Λ configuration (Fig. 1.12). This consists of two stable or metastable ground states, $|g_1\rangle$ and $|g_2\rangle$, both optically coupled to a common, short-lived excited state $|e\rangle$ with spontaneous decay rate γ [12, 13].

The transition $|g_1\rangle \leftrightarrow |e\rangle$ is driven by a weak probe laser with Rabi frequency Ω_p , satisfying $\Omega_p \ll \Omega_c$, while the transition $|g_2\rangle \leftrightarrow |e\rangle$ is driven by a strong coupling laser with Rabi frequency

Ω_c . Denoting the bare transition frequencies by $\omega_{eg_j} = (E_e - E_{g_j})/\hbar$, the single-photon detunings are defined as

$$\Delta_p = \omega_p - \omega_{eg_1}, \quad \Delta_c = \omega_c - \omega_{eg_2}, \quad (1.51)$$

and the two-photon detuning is $\delta_{2\text{ph}} = \Delta_p - \Delta_c$. After applying the rotating wave approximation, the laboratory-frame Hamiltonian is

$$H_{\text{lab}} = \sum_{j=1,2} E_{g_j} |g_j\rangle\langle g_j| + E_e |e\rangle\langle e| + \frac{\hbar}{2} \left(\Omega_p e^{-i\omega_p t} |e\rangle\langle g_1| + \Omega_c e^{-i\omega_c t} |e\rangle\langle g_2| + \text{h.c.} \right). \quad (1.52)$$

The explicit transformation to the rotating frame is performed with

$$U(t) = \exp[-i(\omega_p |e\rangle\langle e| + (\omega_p - \omega_c) |g_2\rangle\langle g_2|) t], \quad (1.53)$$

while $|g_1\rangle$ is left unchanged. With the convention $|\psi_{\text{rot}}\rangle = U^\dagger(t)|\psi_{\text{lab}}\rangle$, the transformed Hamiltonian is

$$H_{\text{rot}} = U^\dagger H_{\text{lab}} U - i\hbar U^\dagger \dot{U}. \quad (1.54)$$

Subtracting the irrelevant constant energy $E_e - \hbar\omega_p$ from all three levels gives

$$H_{\text{rot}} = -\hbar\Delta_p |e\rangle\langle e| + \frac{\hbar}{2} (\Omega_p |e\rangle\langle g_1| + \Omega_c |e\rangle\langle g_2| + \text{h.c.}). \quad (1.55)$$

For the derivation of the dark state and the dressed-state cooling condition, exact two-photon resonance is assumed and both lasers therefore have the same single-photon detuning, $\Delta_p = \Delta_c \equiv \Delta$. Under this assumption, Eq. (1.55) is written as $H_{\text{rot}} = H_0 + V_0$, with [13]

$$H_0 = -\hbar\Delta |e\rangle\langle e| \quad (1.56)$$

$$V_0 = \frac{\hbar}{2} (\Omega_p |e\rangle\langle g_1| + \Omega_c |e\rangle\langle g_2| + \text{h.c.}) \quad (1.57)$$

The incoherent spontaneous emission from the excited state is described by the Liouvillian operator $\mathcal{K}$ [13]:

$$\mathcal{K}\rho = -\frac{\gamma}{2} (|e\rangle\langle e|\rho + \rho|e\rangle\langle e|) + \sum_{j=1,2} \gamma_j |g_j\rangle\langle e|\rho|e\rangle\langle g_j| \quad (1.58)$$

where γ_1 and γ_2 are the partial decay rates into $|g_1\rangle$ and $|g_2\rangle$, with $\gamma_1 + \gamma_2 = \gamma$ [13]. Physically, $\mathcal{K}$ encodes the fact that population in $|e\rangle$ decays at total rate γ , redistributed between $|g_1\rangle$ and $|g_2\rangle$ according to the branching ratios γ_1/γ and γ_2/γ .

The essential physical mechanism underlying EIT is the emergence of a dark state: a coherent superposition of the two ground states that is decoupled from the excited state by destructive quantum interference between the two optical excitation pathways. At two-photon resonance,

MD note: Qui ci sono due problemi. (1) La costante non torna: se sottrai $E_e - \hbar\omega_p$ da tutti e tre i livelli, lo stato $|e\rangle$ finisce a zero, non a $-\hbar\Delta_p$ come scrivi nell'equazione dopo. Quello che stai facendo davvero è porre l'origine delle energie su $|g_1\rangle$, cioè sottrarre E_{g_1} . (2) Più sostanziale: nel frame rotante $|g_2\rangle$ acquista il termine $-\hbar\delta_{2\text{ph}}|g_2\rangle\langle g_2|$, che nella tua espressione manca. Si annulla solo a risonanza a due fotoni, che però assumi soltanto nella frase SUCCESSIVA, mentre l'equazione è presentata come generale. E il termine ti serve davvero, perché più avanti scansioni proprio $\delta_{2\text{ph}} \neq 0$ per ricavare il profilo di assorbimento.

this dark state takes the form [13]:

$$|\Psi_D\rangle = \frac{1}{\Omega} (\Omega_c |g_1\rangle - \Omega_p |g_2\rangle) \quad (1.59)$$

where $\Omega = \sqrt{\Omega_p^2 + \Omega_c^2}$ is the total effective Rabi frequency [13]. An atom optically pumped into $|\Psi_D\rangle$ ceases to absorb light, a phenomenon known as Coherent Population Trapping (CPT) [14].

The decoupling of $|\Psi_D\rangle$ from $|e\rangle$ is verified by direct evaluation of the coupling matrix element $\langle e|V_0|\Psi_D\rangle$. Using Eq. (1.57) and the coefficients of $|\Psi_D\rangle$ in Eq. (1.59), only the $\Omega_p |e\rangle\langle g_1|$ and $\Omega_c |e\rangle\langle g_2|$ terms of V_0 contribute, giving

$$\langle e|V_0|\Psi_D\rangle = \frac{\hbar}{2\Omega} (\Omega_p \Omega_c - \Omega_c \Omega_p) = 0. \quad (1.60)$$

The excitation amplitude contributed by the $|g_1\rangle \rightarrow |e\rangle$ pathway, proportional to Ω_p times the Ω_c/Ω weight of $|g_1\rangle$ in $|\Psi_D\rangle$, is cancelled by the amplitude contributed by the $|g_2\rangle \rightarrow |e\rangle$ pathway, proportional to Ω_c times the $-\Omega_p/\Omega$ weight of $|g_2\rangle$.

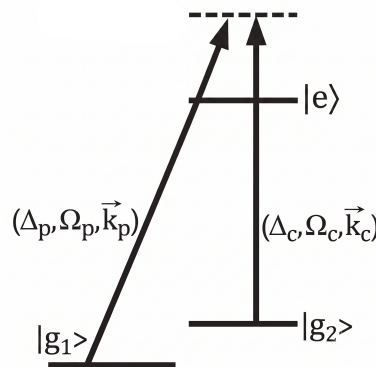


Figure 1.12: The three-level Λ system used for EIT cooling, consisting of two ground states ($|g_1\rangle$, $|g_2\rangle$) coupled to a common excited state ($|e\rangle$) by a probe and a coupling laser.

1.4.3 Dressed States and the Fano Absorption Spectrum

The cooling mechanism is analyzed in the dressed-state picture [13]. When the coupling laser interacts with the atom, the unperturbed atomic states are replaced by hybridized energy levels, the eigenstates of the coupled atom–laser Hamiltonian.

In the driven Λ system, the dark state $|\Psi_D\rangle$ is an eigenstate of the full internal Hamiltonian $H_0 + V_0$. The three-level system thus reduces to an effective two-level system spanned by $|e\rangle$ and the orthogonal bright ground state

$$|\psi_C\rangle = \frac{1}{\Omega} (\Omega_p |g_1\rangle + \Omega_c |g_2\rangle). \quad (1.61)$$

The state $|\psi_C\rangle$ is termed *bright* because, unlike $|\Psi_D\rangle$, it couples to $|e\rangle$ via V_0 . Restricting $H_0 + V_0$ to this two-dimensional subspace yields the effective interaction matrix

$$H_{2\text{-level}} = \hbar \begin{pmatrix} 0 & \Omega/2 \\ \Omega/2 & -\Delta \end{pmatrix} \quad \text{in the basis } \{|e\rangle, |\psi_C\rangle\}. \quad (1.62)$$

MD note: La diagonale della matrice è scambiata rispetto alla base che dichiari. Con $H_0 = -\hbar\Delta |e\rangle\langle e|$ si ha $\langle e|H_0|e\rangle = -\hbar\Delta$ e $\langle\psi_C|H_0|\psi_C\rangle = 0$, quindi nella base $\{|e\rangle, |\psi_C\rangle\}$ la diagonale è $(-\Delta, 0)$, non $(0, -\Delta)$. Gli autovalori non cambiano, ed è per questo che l'equazione delle energie vestite resta giusta, ma cambia l'ETICHETTA degli autovettori, e da lì l'errore si propaga in tre punti (vedi le note seguenti). Con la diagonale corretta viene $\tan\theta = (\Delta + \sqrt{\Delta^2 + \Omega^2})/\Omega$, che per $\Delta \gg \Omega$ è grande, cioè $\theta \rightarrow \pi/2$:

Diagonalizing Eq. (1.62) gives the dressed energies

$$E_{\pm} = -\frac{\hbar\Delta}{2} \pm \frac{\hbar}{2}\sqrt{\Delta^2 + \Omega^2}, \quad (1.63)$$

with the corresponding orthogonal eigenvectors

$$|\psi_+\rangle = \cos\theta |e\rangle + \sin\theta |\psi_C\rangle, \quad |\psi_-\rangle = \sin\theta |e\rangle - \cos\theta |\psi_C\rangle, \quad (1.64)$$

where the mixing angle θ satisfies $\tan\theta = (\sqrt{\Delta^2 + \Omega^2} - \Delta)/\Omega$ [13].

The preceding dressed-state construction refers to exact two-photon resonance, $\Delta_p = \Delta_c = \Delta$. To calculate or measure the absorption profile, instead, the coupling-laser frequency is held fixed, so that $\Delta_c \equiv \Delta$ remains constant, while the probe frequency is scanned. Therefore

$$\Delta_p = \Delta + \delta_{2\text{ph}}, \quad \Delta_c = \Delta, \quad (1.65)$$

where $\delta_{2\text{ph}}$ is the scan variable and $\delta_{2\text{ph}} = 0$ recovers the Hamiltonian used above. Thus, the dressed resonances are set primarily by the fixed coupling field, whereas the probe absorption is evaluated as a function of $\delta_{2\text{ph}}$.

The dressed-state structure is probed via a pump-probe scheme: the coupling laser dresses the atomic states, while the weak cooling laser probes the resulting spectrum. In EIT cooling, the coupling laser operates far from single-photon resonance, $|\Delta| \gg \Omega$. In this limit the mixing angle θ is small, and the dressed states separate into a predominantly excited-like state and a predominantly ground-like state. Since spontaneous emission occurs from the $|e\rangle$ component, the linewidth of each branch is determined by its excited-state admixture. The state $|\psi_+\rangle$ is excited-state-like and retains approximately the bare atomic linewidth ($\gamma_+ \approx \gamma$). The state $|\psi_-\rangle$ is ground-state-like, with a suppressed linewidth $\gamma_- \approx \gamma\Omega^2/(4\Delta^2) \ll \gamma$.

As $\delta_{2\text{ph}}$ is varied by scanning the probe laser while keeping $\Delta_c = \Delta$ fixed, the excitation amplitudes to the broad background ($|\psi_+\rangle$) and to the narrow resonance ($|\psi_-\rangle$) interfere. This interference generates an asymmetric Fano-like absorption profile. For a blue-detuned coupling laser ($\Delta > 0$), the spectrum exhibits three features: a zero-absorption point at $\delta_{2\text{ph}} = 0$, corresponding to the two-photon resonance and the dark state $|\Psi_D\rangle$; a broad absorption resonance centered near the bare probe transition, and a narrow absorption resonance.

The coupling laser induces an AC Stark shift δ that displaces the narrow resonance from the dark-state zero. The exact expression is

$$\delta = \frac{\sqrt{\Delta^2 + \Omega_c^2} - |\Delta|}{2}, \quad (1.66)$$

which in the limit $\Delta \gg \Omega_c$ reduces to $\delta \approx \Omega_c^2/(4\Delta)$. The experimental control of this AC Stark

MD note: Le etichette $\pm$ sono invertite, ed è una conseguenza della diagonale scambiata (vedi nota sopra). Il controllo decisivo è interno alla tua stessa trattazione: $E_+ = (-\Delta + \sqrt{\Delta^2 + \Omega^2})/2 \cdot \hbar$ è ESATTAMENTE lo shift AC Stark δ che scrivi qualche riga più sotto, e lo shift AC Stark è per definizione quello dello stato ground-like stretto, non di quello excited-like largo. Verificato numericamente con $\Delta = 10$, $\Omega = 1$: lo stato a E_+ ha $|\langle e|\psi\rangle|^2 = 0.0025$, quello a E_- ha 0.998. Quindi $|\psi_+\rangle$ è ground-like e stretto, con $\gamma\Omega^2/(4\Delta^2)$, e $|\psi_-\rangle$ è excited-like e largo, con circa γ : nel testo è scritto al contrario. Da correggere anche la didascalia della figura dello spettro di assorbimento, che ripete lo stesso scambio.

shift is the foundation of the EIT cooling protocol.

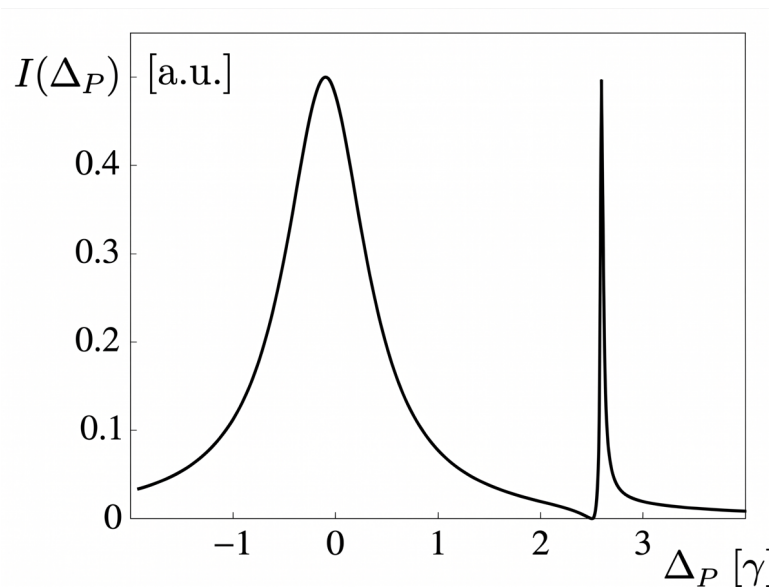


Figure 1.13: Absorption spectrum of the weak probe laser as a function of the two-photon detuning $\delta_{2\text{ph}} = \Delta_p - \Delta_c$, obtained by scanning Δ_p while keeping the coupling detuning $\Delta_c = \Delta$ fixed. The spectrum exhibits the characteristic asymmetric Fano lineshape of EIT: a zero-absorption point at $\delta_{2\text{ph}} = 0$, a broad resonance of width $\gamma_+ \approx \gamma$ associated with $|\psi_+\rangle$, and a narrow, AC-Stark-shifted resonance of width $\gamma_- \ll \gamma$ associated with $|\psi_-\rangle$. Credits: [12]

1.4.4 Coupling to the Motional Degrees of Freedom

For an atom confined in a harmonic trapping potential of frequency ν , the external center-of-mass motion is quantized into vibrational Fock states $|n\rangle$, with mechanical Hamiltonian $H_{\text{mec}} = \hbar\nu(a^\dagger a + 1/2)$. EIT cooling maps the engineered asymmetric Fano spectrum onto these motional sidebands [12].

The dynamics are evaluated in the Lamb–Dicke regime, where the spatial extent of the atomic wavepacket is much smaller than the optical wavelength (characterized by $\eta \ll 1$, see 1.47). In this two-photon process, the relevant Lamb-Dicke parameter is defined by the effective wavevector $\Delta\vec{k} = \vec{k}_p - \vec{k}_c$, such that $\eta = |\Delta\vec{k}|x_0$. A crucial geometrical requirement for EIT cooling is therefore $\Delta\vec{k} \neq 0$: if the lasers are copropagating, there is no net momentum transfer on the atom. For this reason, the beams must be aligned at an angle to guarantee a non-zero projection of $\Delta\vec{k}$ along the cooling axis. In this limit, the ideal cooling conditions are achieved by tuning the AC Stark shift to match the trap frequency [12]:

$$\delta \simeq \nu. \quad (1.67)$$

MD note: Questa definizione è quella giusta per il processo a due fotoni, ma non coincide con quella che hai dato nella sezione sul conveyor belt, dove $\eta = k_c x_0$ con il solo vettore d'onda del fascio di raffreddamento. Il rimando poco sopra manda a quell'equazione come se fosse la stessa cosa. Metterei un rimando in avanti là ("la definizione appropriata per il processo a due fotoni è data in Sez. ..."), oppure definirei η una volta sola qui.

Substituting the approximate expression $\delta \approx \Omega_c^2/(4\Delta)$ yields $\Omega_c^2 \approx 4\Delta\nu$. The exact condition, obtained from Eq. (1.66) without approximation, is

$$\Omega_c^2 = 4\nu(\nu + \Delta), \quad (1.68)$$

which reduces to the approximate form in the limit $\nu \ll \Delta$ typical of EIT cooling. Satisfying this resonance condition produces two simultaneous effects (also shown in Fig. 1.14):

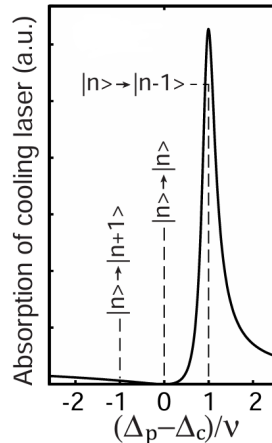


Figure 1.14: *Absorption of the cooling laser as a function of the two-photon detuning, in units of the trap frequency ν . The Fano peak, engineered to sit at +1, drives the red-sideband transition $|n\rangle \rightarrow |n-1\rangle$ responsible for cooling, while the carrier $(|n\rangle \rightarrow |n\rangle)$ and blue-sideband $(|n\rangle \rightarrow |n+1\rangle)$ transitions, marked at 0 and -1, experience comparatively little absorption. Credits: [12]*

- **Suppression of heating (carrier cancellation).** The zero of the Fano profile is aligned with the carrier transition ($|g_1, n\rangle \rightarrow |e, n\rangle$) [12]. An atom in the dark state therefore cannot scatter photons unless it changes its motional state. This suppresses the dominant source of heating that affects standard cooling schemes.

- **Enhancement of cooling (red-sideband excitation).** The narrow dressed-state resonance $|\psi_-\rangle$ is shifted onto the red-sideband transition ($|g_1, n\rangle \rightarrow |e, n-1\rangle$) [12], enhancing the absorption cross-section for the removal of a vibrational quantum. Conversely, the blue sideband ($|g_1, n\rangle \rightarrow |e, n+1\rangle$), which would add a phonon, falls in a spectral region of minimal excitation probability.

MD note: Terzo punto in cui si propaga lo scambio $\pm$: la risonanza stretta spostata dall'AC Stark shift è $|\psi_+\rangle$, non $|\psi_-\rangle$ (vedi le due note precedenti). Il resto della frase è corretto e non va toccato.

After resonant excitation on the red sideband, $|g_1, n\rangle \rightarrow |e, n-1\rangle$, the atom decays at rate γ . For a net phonon to be removed, the decay must predominantly return the atom to $|g_i, n-1\rangle$; that is, it must occur on the carrier transition of the excited manifold, $|e, n-1\rangle \rightarrow |g_i, n-1\rangle$, leaving the vibrational quantum number unchanged, rather than to $|g_i, n\rangle$, which would restore the phonon just removed. This is guaranteed in the Lamb–Dicke regime: the recoil imparted by the spontaneously emitted photon changes n by an amount controlled by η , so that sideband emission ($\Delta n = \pm 1$) is suppressed relative to carrier emission ($\Delta n = 0$) by a factor of order η^2 . The cooling cycle thus closes: absorption removes one phonon on the red sideband, the subsequent decay leaves the vibrational state untouched, and the net effect of many such cycles is the removal of motional quanta. The full scheme of EIT cooling, combining the level structure with the corresponding absorption spectrum and the subsequent decay dynamics, is shown in Fig. 1.15.

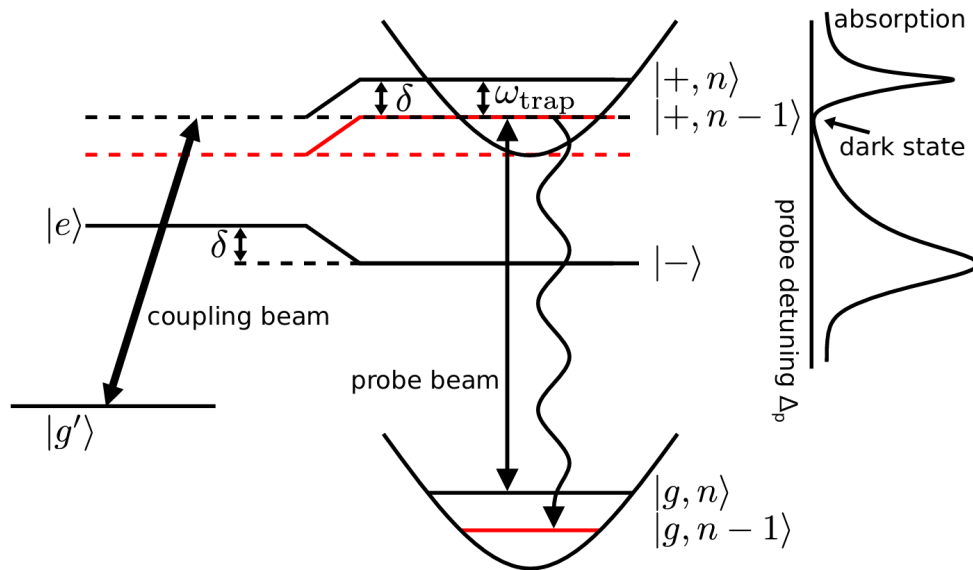


Figure 1.15: Full picture of the EIT cooling scheme, combining the level structure with the corresponding absorption spectrum. From [12]

1.4.5 Cooling Dynamics and the Theoretical Limit

Provided that the cooling laser is weak ($\Omega_p \ll \Omega_c$) and the narrow resonance is not saturated, the motional dynamics can be described by coarse-graining the evolution over the internal-state relaxation time. The populations $P(n)$ of the vibrational states evolve according to a classical rate equation [12, 13]:

$$\frac{d}{dt}P(n) = \eta^2 [A_- ((n+1)P(n+1) - nP(n)) + A_+ (nP(n-1) - (n+1)P(n))] \quad (1.69)$$

where A_- and A_+ are the effective excitation rates of the red and blue sidebands, respectively. Incorporating the full quantum interference around the dark resonance, these rates take the explicit form

$$A_{\pm} = \frac{1}{4} \left(\frac{\Omega_p \Omega_c}{\Omega} \right)^2 \frac{\gamma \nu^2}{[\Omega_c^2/4 - \nu(\nu \mp \Delta)]^2 + \gamma^2 \nu^2/4}. \quad (1.70)$$

The evolution of the mean phonon number $\langle n \rangle = \sum_n nP(n)$ follows [12, 13]:

$$\frac{d\langle n \rangle}{dt} = -\eta^2 (A_- - A_+) \langle n \rangle + \eta^2 A_+ = -W \langle n \rangle + \eta^2 A_+, \quad (1.71)$$

where $W = \eta^2 (A_- - A_+)$ is the net cooling rate. Under the optimal condition $\delta \simeq \nu$, the maximum cooling rate scales as

$$W_{\max} \sim \eta^2 \frac{\Omega_p^2 \Omega_c^2}{\Omega^2 \gamma}, \quad (1.72)$$

which confirms that fast cooling is achieved for large Rabi frequencies [13].

The steady-state mean vibrational quantum number $\langle n_S \rangle$ is given by the ratio of the heating rate to the net cooling rate:

$$\langle n_S \rangle = \frac{A_+}{A_- - A_+} = \frac{\gamma^2 \nu^2 + 4[\Omega_c^2/4 - \nu(\nu + \Delta)]^2}{4\Delta\nu|\Omega_c^2 - 4\nu^2|}. \quad (1.73)$$

The absolute minimum is achieved when the AC Stark shift matches the trap frequency, i.e. when Eq. (1.68) is satisfied, yielding the fundamental theoretical cooling limit [12, 13]:

$$\langle n_S \rangle_{\min} = \left(\frac{\gamma}{4\Delta} \right)^2. \quad (1.74)$$

By choosing a sufficiently large coupling-laser detuning $\Delta \gg \gamma$, $\langle n_S \rangle$ can in principle be made arbitrarily small. However maintaining the resonance condition $\delta \simeq \nu$ at larger Δ requires $\Omega_c^2 \propto \Delta\nu$ to grow accordingly, so faster cooling and lower final occupations demand correspondingly higher coupling-laser intensities.

Bibliography

- [1] Matej Komanec *et al.* “Hollow-Core Optical Fibers”. In: *Radioengineering* 29 (2020), pp. 417–430. DOI: 10.13164/re.2020.0417.
- [2] M. J. F. Digonnet *et al.* “Understanding air-core photonic-bandgap fibers: analogy to conventional fibers”. In: *Journal of Lightwave Technology* 23.12 (2005), pp. 4169–4177. DOI: 10.1109/JLT.2005.859406.
- [3] B. Debord *et al.* “Hollow-Core Fiber Technology: The Rising of “Gas Photonics””. In: *Fibers* 7.2 (2019), p. 16. DOI: 10.3390/fib7020016.
- [4] R. F. Cregan *et al.* “Single-Mode Photonic Band Gap Guidance of Light in Air”. In: *Science* 285.5433 (1999), pp. 1537–1539. DOI: 10.1126/science.285.5433.1537.
- [5] J. von Neumann and E. Wigner. “Über merkwürdige diskrete Eigenwerte”. In: *Physikalische Zeitschrift* 30 (1929), pp. 465–467.
- [6] E. L. Raab *et al.* “Trapping of Neutral Sodium Atoms with Radiation Pressure”. In: *Physical Review Letters* 59.23 (1987), pp. 2631–2634. DOI: 10.1103/PhysRevLett.59.2631.
- [7] Stefan Kuhr. “A Controlled Quantum System of Individual Neutral Atoms”. PhD thesis. Bonn, Germany: Rheinische Friedrich-Wilhelms-Universität Bonn, 2003.
- [8] Harold J. Metcalf and Peter van der Straten. *Laser Cooling and Trapping*. Springer New York, 1999. DOI: 10.1007/978-1-4612-1470-0.
- [9] J. Dalibard and C. Cohen-Tannoudji. “Laser cooling below the Doppler limit by polarization gradients: simple theoretical models”. In: *Journal of the Optical Society of America B* 6.11 (1989), pp. 2023–2045. DOI: 10.1364/JOSAB.6.002023.
- [10] Rudolf Grimm, Matthias Weidemüller, and Yurii B. Ovchinnikov. “Optical Dipole Traps for Neutral Atoms”. In: *Advances in Atomic, Molecular, and Optical Physics* 42 (2000), pp. 95–170. DOI: 10.1016/S1049-250X(08)60186-X.
- [11] L. D. Landau and E. M. Lifshitz. *Mechanics*. 3rd. Vol. 1. Course of Theoretical Physics. Section 50: Adiabatic invariants. Butterworth-Heinemann, 1976. ISBN: 978-0750628969.

- [12] Giovanna Morigi, Jürgen Eschner, and Christoph H. Keitel. “Ground State Laser Cooling Using Electromagnetically Induced Transparency”. In: *Physical Review Letters* 85.21 (2000), pp. 4458–4461. DOI: 10.1103/PhysRevLett.85.4458.
- [13] G. Morigi. “Cooling atomic motion with quantum interference”. In: *Physical Review A* 67 (2003), p. 033402. DOI: 10.1103/PhysRevA.67.033402.
- [14] Brahim Lounis and Claude Cohen-Tannoudji. “Coherent population trapping and Fano profiles”. In: *Journal de Physique II* 2 (1992), pp. 579–592. DOI: 10.1051/jp2:1992153.