

Todo list

MD suggestion: aggiungerei ”(ODT)” per coerenza stilistica	9
MD suggestion: ”Building” non suona molto bene. Io invertirei la frase per renderla più liscia	9
MD suggestion: non mi sembra inglese corretto. Io direi ”enables the control of the transport of atoms”	9
MD typo: ”Fibers” sborda dal margine. Non è grave, ma se riesci a fixarlo è meglio	9
MD note: direi che è il contrario, l’angolo di riflessione (se è quello a cui ti stai riferendo) deve essere inferiore a quello critico	9
MD suggestion: riscrivi questa frase, o perlomeno toglì la prima virgola. Non mi convince nemmeno ”therefore cannot”, io almeno invertirei le due parole. Anche la virgola dopo ”TIR” non mi convince. Riscriverei anche la frase successiva per metterci davvero il soggetto e magari non iniziarla con ”However,”.	10
MD suggestion: Potresti scrivere ”An air- or gas-filled hollow core, where $n_{\text{core}} \approx 1 < n_{\text{clad}} \approx 1.45$, cannot guide light by TIR because the required refractive index contrast is inverted. Nevertheless, such a core enables light propagation through a medium that is significantly less dispersive, nonlinear, and absorptive than silica, while also granting optical access to atoms, molecules, and particles that a solid core excludes. The central challenge of hollow-core fiber (HCF) technology is therefore to achieve optical confinement without relying on conventional index guiding.”	10
MD note: io citerei direttamente ”KNIGHT, J. C., BIRKS, T. A., RUSSELL, P. S. J., et al. All- silica single-mode optical fiber with photonic crystal cladding. Optics Letters, 1996, vol. 21, no. 19, p. 1547–1549. DOI: 10.1364/OL.21.001547”	10
MD note: anche qui una citazione mi sembra doverosa	10
MD note: anche qui	10

■ MD suggestion: io aggiungerei "thanks to an increased physical separation of core and cladding modes"	10
■ MD suggestion: così mi sembra molto poetica. Io scriverei "can be dwawn on/from condensed matter physics concepts"	10
■ MD note: io espliciterei "the cross-section of the cladding"	10
■ MD note: ci starebbe bene una citazione qui	11
■ MD suggestion: io direi "into two families, according to their guiding mechanisms"	11
■ MD typo: Se riesci a tenere tutto sulla stessa riga è meglio	13
■ MD typo: metti la footnote prima della citazione, o almeno prima del punto.	13
■ MD suggestion: aggiungerei una virgola qui	15
■ MD note: dipende dal waist e dalla lunghezza d'onda tramite le funzioni di Bessel. Per core sufficientemtne piccoli sono singolo modo anche loro	15
■ MD note: immagino avrai preso l'immagine da un paper, per cui ci vorrebbero i credits	15
■ MD note: dipende molto anche dall'iniezione, perché nell'iniezione il tuo modo viene scomposto nella base dei modi della fibra e se è già in un singolo modo (anche non fondamentale) ci rimane in prima approssimazione.	16
■ MD note: questa è l'interpretazione col modellino masa-molla-smorzatore, ma tecnicamente sarebbe più corretto parlare di probabilità di interazione. La forza diventa una proprietà statistica del sistema, nel senso che la osserviamo come una media su molti cicli di eccitazioni e de-eccitazioni, sfruttando l'isotropia dell'emissione e l'anisotropia dell'assorbimento.	17
■ MD suggestion: io direi "a pair of coils in anti-Helmholtz configuration"	17
■ MD note: il campo è nullo al centro solo se era già nullo, per cui io specificherei "generated field"	17
■ MD note: è il Doppler cooling fintanto che è MOT (in cui appunto c'è il campo magnetico e c'è la trappola). La melassa è quando si spengono le bobine di quadrupolo che appunto togliendo la trappola danno vita ad una fase in cui gli atomi si comportano come si fossero in una melassa	17
■ MD note: decisamente non è una friction force. Al massimo è una forza efficace di melassa/resistenza fluidodinamica, perché dipende dalla velocità invece di essere costante. E non è una forza se non in senso statistico. La puoi chiamare "effective force", magari "effective dissipative molasses-like damping force"	17

■ MD question:	Sei sicura? Io credo che sia un ordine di grandezza indicativo, anche considerando che il sistema non è all’equilibrio termodinamico e che appunto ha poco senso parlare di temperaura per un sistema non in equilibrio	18
■ MD note:	anche qui sono effetti medi	19
■ MD note:	on average	19
■ MD suggestion:	non so quanto sia corretto dire che il gradiente di un campo ”in-teragisca” con momento di dipolo	20
■ MD suggestion:	io userei ”framework”	22
■ MD typo:	anceh qui sfori a destra, controlla i margini	26

CC notes

■ [CC 1] CC nota:	come leggere questo PDF	9
■ [CC 2] CC sulla nota MD:	“optical dipole trap”	9
■ [CC 3] CC sulla nota MD:	“Building”	9
■ [CC 4] CC sulla nota MD:	“allow for the controlled transport of...”	9
■ [CC 5] CC sulla nota MD:	“titolo 1.1.1”	9
■ [CC 6] CC sulla nota MD:	“When light propagating inside the core...”	9
■ [CC 7] CC sulla nota MD:	“,”	10
■ [CC 8] CC sulla nota MD:	“opening the core to atoms, gases,...”	10
■ [CC 9] CC sulla nota MD:	“1996”	10
■ [CC 10] CC sulla nota MD:	“introduced in 2002”	10
■ [CC 11] CC sulla nota MD:	“achieved around 2010”	10
■ [CC 12] CC sulla nota MD:	“reduce confinement losses”	10
■ [CC 13] CC sulla nota MD:	“draws on concepts developed in condensed...”	10
■ [CC 14] CC sulla nota MD:	“the cladding”	10
■ [CC 15] CC sulla nota MD:	“Solving the electromagnetic wave equation in...” . . .	11
■ [CC 16] CC sulla nota MD:	“into two distinct guiding regimes”	11

□ [CC 17] CC sulla nota MD: “formula evidenziata”	13
□ [CC 18] CC sulla nota MD: “overlap ”	13
□ [CC 19] CC nota: accounting for the phase accumulated at the air–glass interfaces	14
□ [CC 20] CC sulla nota MD: “loss”	15
□ [CC 21] CC sulla nota MD: “the core of a Kagome IC...”	15
□ [CC 22] CC sulla nota MD: “illustrates this modal hierarchy”	15
□ [CC 23] CC sulla nota MD: “if properly designed it can behave...”	16
□ [CC 24] CC nota: titolo 1.2, sfora il margine	17
□ [CC 25] CC sulla nota MD: “It relies on the combination of...”	17
□ [CC 26] CC sulla nota MD: “anti-Helmholtz coils”	17
□ [CC 27] CC sulla nota MD: “field is zero”	17
□ [CC 28] CC sulla nota MD: “known as”	17
□ [CC 29] CC sulla nota MD: “friction force”	17
□ [CC 30] CC riferimenti: defines the Doppler temperature limit	17
□ [CC 31] CC sulla nota MD: “This expression corresponds to the minimum...”	18
□ [CC 32] CC sulla nota MD: “Upon reaching the peak of the...”	19
□ [CC 33] CC riferimenti: A schematic representation of this process is depicted in Fig.	19
□ [CC 34] CC sulla nota MD: “the atom’s kinetic energy”	19
□ [CC 35] CC nota: Temperatures of the order of a few	19
□ [CC 36] CC sulla nota MD: “relies on the interaction between the...”	20
□ [CC 37] CC errore: the classical result of	21
□ [CC 38] CC sulla nota MD: “approach”	22
□ [CC 39] CC errore: higher-lying transitions lie tens of THz away	23
□ [CC 40] CC nota: absorbing this factor into an effective linewidth	25
□ [CC 41] CC nota: two counter-propagating, phase-coherent beams	26
□ [CC 42] CC sulla nota MD: “titolo 1.3.1”	26

[CC 43] CC nota: $\phi(z)$ the Gouy phase shift	26
[CC 44] CC nota: Each beam carries power	27
[CC 45] CC errore: This anisotropy suppresses tunneling between adjacent lattice sites	28
[CC 46] CC nota: up to an overall sign in the time argument of the envelope	29
[CC 47] CC riferimenti: The macroscopic velocity of the interference pattern . . .	30
[CC 48] CC nota: The threshold acceleration for a particle with zero kinetic energy	32
[CC 49] CC nota: the harmonic trap frequency	33
[CC 50] CC nota: heating, the transverse compression required to match the fiber mode	33
[CC 51] CC errore: Subtracting the irrelevant constant energy	34
[CC 52] CC errore: yields the effective interaction matrix	35
[CC 53] CC errore: is excited-state-like and retains approximately the bare atomic linewidth	36
[CC 54] CC riferimenti: The experimental control of this AC Stark shift is the foundation	37
[CC 55] CC nota: the relevant Lamb-Dicke parameter is defined by the effective wavevector	37
[CC 56] CC errore: is shifted onto the red-sideband transition	38

Contents

1	Theoretical Background	9
1.1	Hollow-Core Photonic Crystal Fibers	9
1.1.1	From Conventional to Hollow-Core Optical Fibers	9
1.1.2	Photonic Bandgap and Inhibited Coupling Guiding Mechanisms	10
1.1.3	Kagome-Lattice Hollow-Core Fibers	13
1.2	Electromagnetic Trapping of Neutral Atoms	17
1.2.1	The Magneto-Optical Trap	17
1.2.2	Polarization Gradient Cooling	18
1.2.3	The Optical Dipole Trap	20
1.2.3.1	Oscillator model and semiclassical treatment	20
1.2.3.2	Quantum-mechanical picture	22
1.2.3.3	Multi-level atoms and the alkali D -lines	23
1.3	Optical Conveyor Belt	26
1.3.1	Interference of Counter-Propagating Gaussian Beams and the Stationary Lattice	26
1.3.2	Geometry of the Trapping Potential	28
1.3.3	Kinematics of the Moving Standing Wave	28
1.3.4	Trap-Depth Scaling and Adiabatic Compression	30
1.3.5	Dynamics in the Accelerated Potential	31
1.4	Electromagnetically Induced Transparency Cooling	33

1.4.1	Introduction to EIT Cooling	33
1.4.2	The Three-Level Λ System and Coherent Population Trapping	33
1.4.3	Dressed States and the Fano Absorption Spectrum	35
1.4.4	Coupling to the Motional Degrees of Freedom	37
1.4.5	Cooling Dynamics and the Theoretical Limit	39

Chapter 1

Theoretical Background

This chapter provides an overview of the theoretical background underlying the main topics addressed in this thesis.^[CC 1]

The first part introduces hollow-core fibers and describes their light-guiding mechanisms. This is followed by an overview of atomic trapping techniques, starting from the magneto-optical trap (MOT) and the optical dipole trap^[CC 2], outlining the fundamental principles that enable the cooling and confinement of neutral atoms.

Building^[CC 3] on these concepts, more advanced manipulation techniques are then discussed. Specifically, the concept of the optical conveyor belt is introduced, demonstrating how moving optical lattices allow for the controlled transport of atoms^[CC 4]. Finally, the theoretical principles of electromagnetically induced transparency (EIT) cooling are presented, highlighting its potential for achieving sub-Doppler temperatures inside the fiber core.

1.1 Hollow-Core Photonic Crystal Fibers

1.1.1 From Conventional to Hollow-Core Optical Fibers

[CC 5]

A conventional optical fiber guides light through Total Internal Reflection (TIR). In a step-index fiber, a solid dielectric core of refractive index n_{core} is surrounded by a cladding of lower index n_{clad} , with $n_{\text{core}} > n_{\text{clad}}$. When light propagating inside the core meets the core–cladding interface at an angle steeper than the critical angle $\theta_c = \arcsin(n_{\text{clad}}/n_{\text{core}})$, it is fully reflected and remains trapped within the core over macroscopic distances.^[CC 6] Standard telecommunications fibers, based on a silica core ($n \approx 1.45$) slightly doped to increase its index with respect to the

MD suggestion: aggiungerei ”(ODT)” per coerenza stilistica

MD suggestion: ”Building” non suona molto bene. Io invertirei la frase per renderla più liscia

MD suggestion: non mi sembra inglese corretto. Io direi ”enables the control of the transport of atoms”

MD typo: ”Fibers” sborda dal margine. Non è grave, ma se riesci a fixarlo è meglio

MD note: direi che è il contrario, l’angolo di riflessione (se è quello a cui ti stai riferendo) deve essere inferiore a quello critico

[CC 1] CC nota: Come leggere questo PDF. Ci sono due colonne di note. A SINISTRA quelle di MD, invariate: stessi colori (marrone nota, blu domanda, rosso suggerimento, arancio refuso) e stessa lista dei todo in testa al capitolo, che continua a elencare solo quelle. A DESTRA quelle di CC, marcate nel testo da una sottolineatura TRATTEGGIATA invece che da un’evidenziazione, e divise per tipo di affermazione: CC errore e’ un errore verificato nel testo della tesi, CC nota un’osservazione tecnica, CC riferimenti un rilievo su bibliografia, figure o rimandi, CC sulla nota MD un verdetto su una nota di MD. Ogni nota di MD ne ha uno. Il conteggio, verificato sul sorgente: 32 note di MD, 32 verdetti. CONFERMO 21, CORREGGO 4, AMMORBIDIREI 3, e uno ciascuno di RISPONDO (la domanda sul limite Doppler), RIDONDANTE, ATTENZIONE (il blocco da incollare duplicherebbe una frase già presente) e NON CONCORDO (“Building”). Dei 4 CORREGGO, tre riguardano note che, se applicate, introdurrebbero un errore nel testo (angolo critico, “friction force”, “enables the control of the transport”); il quarto e’ la nota sui modi trasversi, giusta nella premessa e sbagliata nella conclusione. Le note CC indipendenti sono 23: 7 errori verificati, 12 osservazioni tecniche, 4 rilievi su bibliografia e figure. Nessuna nota MD e’ stata cancellata o riscritta. Stato rispetto al ramo principale: questo ramo include ora le correzioni della studentessa fino a a3a1f66 (“corrected up to chapter 2”). Verificato nota per nota: quel commit risolve tre rilievi della revisione (i segnaposto \tocomplete, lo spazio mancante prima di una \cite nell’introduzione, e il modello dell’oscilloscopio) e ne introduce due nuovi (un segnaposto in chiaro nel capitolo 2 e, nelle conclusioni, un refuso più la cancellazione della riserva sulla lentezza della dinamica multilivello). Tutti gli altri restano aperti: le 32 note MD hanno ancora tutte il loro ancoraggio nel testo corrente, quindi nessuna e’ stata superata dalle modifiche. C’e’ inoltre una sezione NUOVA da rivedere, il fit alla Gerz nel capitolo 3, con tre note sue.

[CC 2] CC sulla nota MD “optical dipole trap”: CONFERMO: il MOT ha la sigla, l’ODT no, ed e’ usata subito dopo.

[CC 3] CC sulla nota MD “Building”: NON CONCORDO. “Building on these concepts” e’ inglese accademico corrente e del tutto idiomatico; e’ una delle aperture più comuni per questo tipo di frase. Non vedo cosa guadagni l’inversione.

[CC 4] CC sulla nota MD “allow for the controlled transport of..”: CORREGGO: la riformulazione introdurrebbe due errori. Il soggetto e’ “moving optical lattices”, plurale, quindi “enables” sbaglia l’accordo; e “the control of the transport of atoms” impila due complementi di specificazione dove la tesi ha un aggettivo. “Allow for the controlled transport of atoms” e’ corretto così.

[CC 5] CC sulla nota MD “titolo 1.1.1”: CONFERMO, ma non nel PDF che stavi guardando. Compilando le due geometrie: in quella di revisione, con i margini larghi, questo titolo NON sfora; nel layout finale (A4, margin=2.5cm) sfora di 19.97 pt. Quello che si vedeva a pagina 3 era la riga dell’indice, dove la nota stessa finiva stampata. Causa comune: titlesec giustifica le intestazioni. Risolto con \raggedright nei tre \titleformat*. Nota di metodo, CC: questa nota stava dentro l’argomento di \subsection, che e’ un argomento mobile. Il testo della nota finiva stampato verbatim nell’indice, hyperref segnalava “Token not allowed in a PDF string” e il \todo veniva eseguito due volte, una dall’indice. L’ho spostata subito DOPO il titolo: il testo della nota e’ il tuo, invariato; si perde solo l’evidenziazione della singola parola.

[CC 6] CC sulla nota MD “When light propagating inside the core..”: CORREGGO. La tesi ha ragione e la nota invertirebbe la condizione. L’angolo critico e’ definito RISPETTO ALLA NORMALE, ed e’ la convenzione in cui vale $\theta_c = \arcsin(n_{\text{clad}}/n_{\text{core}})$, la formula scritta tre parole prima: la riflessione totale richiede incidenza MAGGIORE di θ_c . La condizione “minore” vale misurando dall’asse della fibra, o come angolo radente. Resta valido un punto: “steeper” e’ ambiguo in inglese, meglio “at an angle of incidence greater than the critical angle, measured from the normal to the interface”.

cladding, are a well-known example of this guiding mechanism and form the basis of modern optical networks.

A hollow ,^[CC 7] air- or gas-filled core, where $n_{\text{core}} \approx 1 < n_{\text{clad}} \approx 1.45$, therefore cannot guide by TIR, since the index hierarchy is reversed. However, it would allow light to propagate through a medium far less dispersive, less nonlinear, and less absorptive than silica, while simultaneously opening the core to atoms, gases, and particles for which a solid core is a physical barrier.^[CC 8] The central challenge of hollow-core fiber (HCF) technology is therefore to find a confinement mechanism that does not rely on an index hierarchy between core and cladding.

Hollow-core guidance was first attempted in the 1980s and 1990s using metal-coated waveguides and simple glass capillaries, but these suffered from high losses due to the lack of an efficient low-loss cladding. This limitation was overcome with the invention of the solid-core photonic crystal fiber (PCF) in 1996^[CC 9], whose concept was extended to hollow cores in 1999 with the first hollow-core photonic bandgap fibers (HC-PBGFs), where light confinement is achieved through the photonic bandgap of a periodically microstructured cladding [1].

Alternative designs were therefore developed, including Kagome-lattice hollow-core fibers, introduced in 2002^[CC 10]. In these structures, light confinement does not rely on a bandgap but on suppressed coupling between core and cladding modes (see Section 1.1.2). Further improvements were achieved around 2010^[CC 11] with the introduction of negative-curvature (hypocycloid) core boundaries, which significantly reduce confinement losses^[CC 12]. This approach led to simplified antiresonant fiber (ARF) designs and, more recently, to nested antiresonant nodeless fibers (NANFs).

The main milestones in this development are summarized in Fig. 1.1. The evolution of these structures can be understood through two main trends: the progressive simplification of the cladding geometry and the transition between different light-confinement mechanisms.

1.1.2 Photonic Bandgap and Inhibited Coupling Guiding Mechanisms

The theoretical description of HCPCFs draws on concepts developed in condensed matter physics^[CC 13]. In a crystalline solid, the periodic potential experienced by electrons gives rise to allowed energy bands separated by forbidden gaps in which no electronic states can exist. In the optical case, the periodic electronic potential is replaced with a periodic dielectric modulation: the cladding^[CC 14] of an HCPCF is a two-dimensional photonic crystal, and the hollow core introduces a structural defect, much like a vacancy or impurity in a semiconductor. Solving the electromagnetic wave equation in the presence of this periodic structure yields eigenmodes

MD suggestion: riscrivi questa frase, o perlomeno toglì la prima virgola. Non mi convince nemmeno ”therefore cannot”, io almeno invertirei le due parole. Anche la virgola dopo ”TIR” non mi convince. Riscriverei anche la frase successiva per metterci davvero il soggetto e magari non iniziarla con ”However,”.

MD suggestion: Potresti scrivere ”An air- or gas-filled hollow core, where $n_{\text{core}} \approx 1 < n_{\text{clad}} \approx 1.45$, cannot guide light by TIR because the required refractive index contrast is inverted. Nevertheless, such a core enables light propagation through a medium that is significantly less dispersive, nonlinear, and absorptive than silica, while also granting optical access to atoms, molecules, and particles that a solid core excludes. The central challenge of hollow-core fiber (HCF) technology is therefore to achieve optical confinement without relying on conventional index guiding.”

MD note: io citerei direttamente ”KNIGHT, J. C., BIRKS, T. A., RUSSELL, P. S. J., et al. All- silica single-mode optical fiber with photonic crystal cladding. Optics Letters, 1996, vol. 21, no. 19, p. 1547–1549. DOI: 10.1364/OL.21.001547”

MD note: anche qui una citazione mi sembra doverosa

MD note: anche qui

MD suggestion: io aggiungerei ”thanks to an increased physical separation of core and cladding modes”

MD suggestion: così mi sembra molto poetica. Io scriverei ”can be dwawn on/from condensed matter physics concepts”

MD note: io espliciterei ”the cross-section of the cladding”

[CC 7] CC sulla nota MD “,”: CONFERMO. La virgola e’ fra due aggettivi non coordinabili e va tolta.

[CC 8] CC sulla nota MD “opening the core to atoms, gases,...”: ATTENZIONE prima di incollare. Il blocco proposto si chiude con “The central challenge of hollow-core fiber (HCF) technology is therefore to achieve optical confinement...”, ma quella frase c’e’ gia’ subito dopo l’evidenziato, in altra forma. Incollandolo così’ com’e’ la frase compare due volte: o si accorcia il blocco, o si cancella quella esistente.

[CC 9] CC sulla nota MD “1996”: CONFERMO, riferimento corretto. Aggiungo che non e’ ancora in bibliography.bib: va inserita la voce prima di poterla citare.

[CC 10] CC sulla nota MD “introduced in 2002”: CONFERMO. La citazione e’ BENABID, F., KNIGHT, J. C., ANTONOPOULOS, G., RUSSELL, P. St. J., *Stimulated Raman scattering in hydrogen-filled hollow-core photonic crystal fiber*, Science **298**, 399–402 (2002), DOI: 10.1126/science.1076408. Non e’ in bibliografia. Da non confondere con Couny2007, che c’e’ gia’ ma e’ il lavoro Kagome successivo.

[CC 11] CC sulla nota MD “achieved around 2010”: CONFERMO, e questa e’ gia’ in bibliografia: basta \cite{Wang2011}. Ma la voce va controllata prima di usarla: l’elenco autori registrato (“Y. Y. Wang, W. J. Wadsworth, J. C. Knight”) non corrisponde a quel lavoro.

[CC 12] CC sulla nota MD “reduce confinement losses”: AMMORBIDIREI, anzi toglierei. La frase successiva dice gia’ “increases the phase mismatch and reduces the overlap between the core mode and the surrounding silica”: l’aggiunta la ripete. E “separation of modes” e’ piu’ vago del sovrapporsi ridotto del campo con la silice, che e’ il meccanismo vero.

[CC 13] CC sulla nota MD “draws on concepts developed in condensed...”: AMMORBIDIREI. “Draws on” e’ inglese idiomatico e per niente enfatico, quindi si puo’ lasciare. La riformulazione proposta non e’ grammaticale (e contiene un refuso, “dwawn”). Se il registro non convince: “borrows concepts from condensed-matter physics”.

[CC 14] CC sulla nota MD “the cladding”: CONFERMO. Il cristallo fotonico bidimensionale vive nel piano trasverso, quindi esplicitare la sezione e’ corretto.

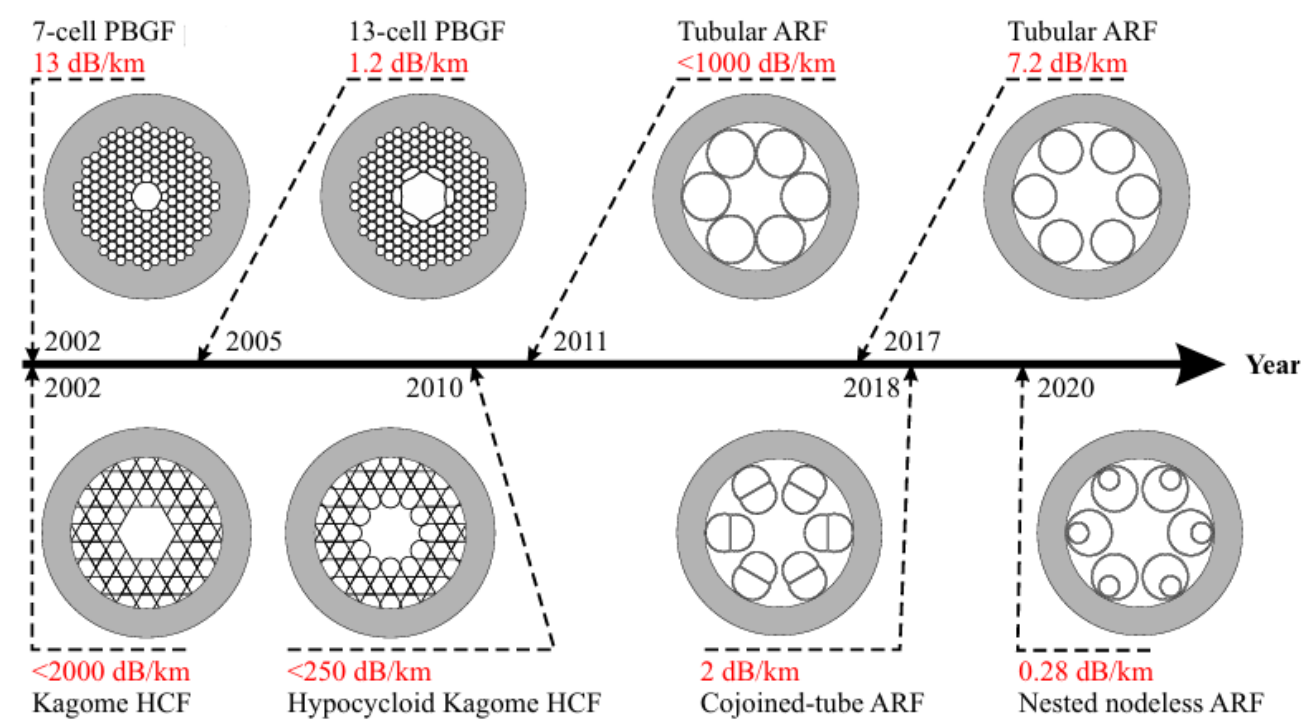


Figure 1.1: *Timeline illustrating the structural evolution of hollow-core optical fibers. The progression highlights the transition from early photonic bandgap fibers (PBGF) to advanced antiresonant architectures (ARF), including Kagome, cojoined-tube, and nested nodeless designs. Attenuation values are given for the wavelength of 1550 nm. Credits [1].*

organized in bands, with the possibility of forbidden spectral regions in which the cladding does not support propagating modes.^[CC 15]

Mathematically, this is cast as an eigenvalue problem for the mode amplitudes, which take the form $E \propto e^{i\beta z}$ along the fiber axis z , where β is the longitudinal propagation constant. The set of allowed solutions defines the Density of Photonic States (DOPS), conventionally expressed in terms of the effective refractive index $n_{\text{eff}} = \beta/k_0$, where $k_0 = \omega/c$ is the vacuum wavenumber [2]. A diagram of the DOPS in the (n_{eff}, ω) plane plays, for photons, the same role that a band structure diagram plays for electrons: it identifies which modes can exist at a given frequency and effective index.

Based on the structure of the DOPS, HCPCFs are divided into two distinct guiding regimes^[CC 16]: Photonic Band Gap (PBG) and Inhibited Coupling (IC), schematically compared in Fig. 1.2 together with conventional TIR guidance.

Photonic Band Gap (PBG) guidance. In PBG fibers, the periodic cladding is engineered so that for certain ranges of (ω, n_{eff}) the DOPS is zero: no propagating cladding modes exist, and these forbidden regions are the photonic bandgaps. Guidance is achieved by introducing a hollow-core defect whose localized optical mode falls within one of these gaps: the core mode cannot leak into the surrounding structure because there are no available cladding states

MD note: ci starebbe bene una citazione qui

[CC 15] CC sulla nota MD “Solving the electromagnetic wave equation in...”: CONFERMO. Proposta concreta: JOANNOPOULOS, JOHNSON, WINN, MEADE, *Photonic Crystals: Molding the Flow of Light*, 2a ed., Princeton, 2008; oppure RUSSELL, P., *Photonic crystal fibers*, Science **299**, 358–362 (2003).

MD suggestion: io direi “into two families, according to their guiding mechanisms”

[CC 16] CC sulla nota MD “into two distinct guiding regimes”: CONFERMO. “Famiglie” e’ piu’ esatto di “regimi”: la distinzione e’ strutturale, non di regime operativo.

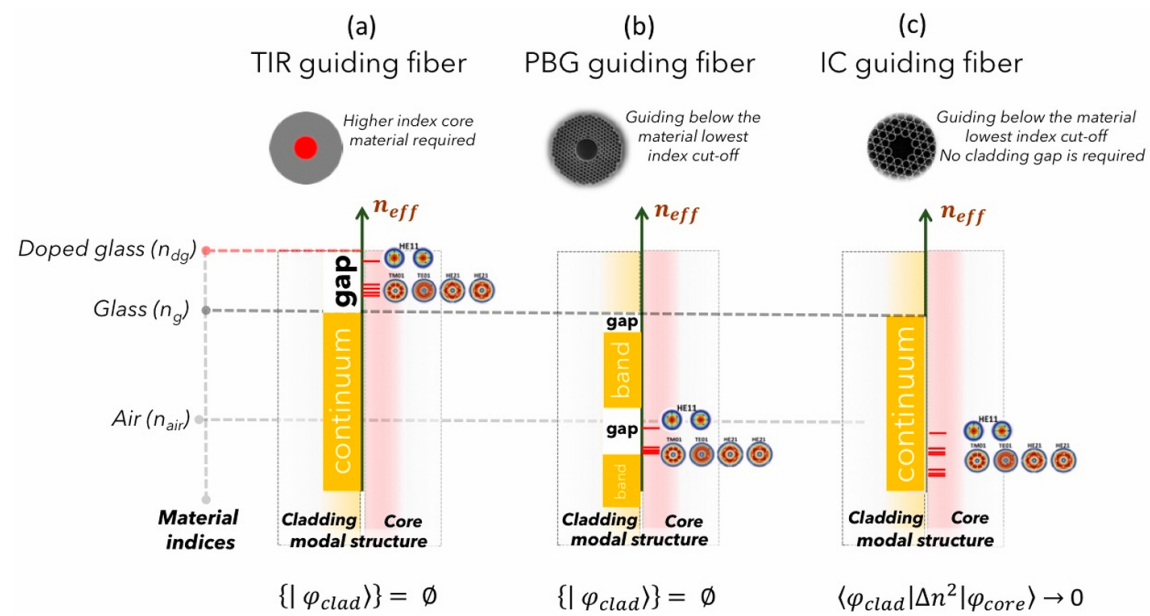


Figure 1.2: Schematic comparison of the internal reflection, PBG and IC guiding mechanisms. The effective index n_{eff} is plotted on the vertical axis, with the relevant index levels marked by horizontal dashed lines. The graphs display the cladding photonic bands versus n_{eff} , highlighting the core guidance regimes through continua (orange rectangles) and bandgaps (white rectangles). For TIR and PBG fibers, core modes are guided within the gaps. In contrast, IC fibers exhibit no bandgaps, and guidance occurs alongside the cladding mode continuum. Credits [3].

to couple into at that effective index [4]. PBG fibers deliver extremely low confinement losses, but their transmission is restricted to the narrow spectral bandwidth of the bandgap itself. For applications requiring the simultaneous guidance of widely separated wavelengths, for instance, multiple atomic transitions co-propagating in the same fiber, this narrowness becomes a limitation.

Inhibited Coupling (IC) guidance. Unlike photonic bandgap fibers, IC fibers do not require a forbidden spectral region in the cladding; instead, the core mode coexists with a continuum of cladding modes of similar effective refractive index n_{eff} , and confinement is achieved by suppressing the coupling between them. By treating the silica microstructure as a local dielectric perturbation $\Delta n^2(x, y)$ introduced into a uniform vacuum background, the interaction between a core mode $|\varphi_{\text{core}}\rangle$ and a cladding mode $|\varphi_{\text{clad}}\rangle$ can be described by the overlap integral [3]

$$\langle \varphi_{\text{clad}} | \Delta n^2 | \varphi_{\text{core}} \rangle = \iint_{\text{cross-section}} \varphi_{\text{clad}}^*(x, y) \Delta n^2(x, y) \varphi_{\text{core}}(x, y) dx dy. \quad (1.1)$$

In this expression, the term Δn^2 restricts the interaction to the physical regions where the silica glass is present. Whenever the fiber geometry is engineered to suppress this integral, the core mode uncouples from the cladding and remains tightly confined.

This behavior is closely related to a Bound State in the Continuum (BIC), a concept introduced by von Neumann and Wigner in 1929 [5] to describe a localized state that remains confined due to symmetry or destructive interference despite its energy lying within a continuous spectrum of radiative states.

Two mechanisms can drive the integral in Eq. 1.1 toward zero. The first is a *reduced spatial overlap*: if the core and cladding fields occupy largely disjoint regions of the transverse plane, the integrand is small everywhere and so is the integral. The second is a *transverse phase mismatch*, which is best seen by decomposing each mode into azimuthal harmonics, $\varphi(r, \theta) = \sum_m A_m R_m(r) e^{im\theta}$ [CC 17]. Substituting into Eq. 1.1 separates the integral into a radial part and an azimuthal part,

$$\langle \varphi_{\text{clad}} | \Delta n^2 | \varphi_{\text{core}} \rangle \propto \int_{r_1}^{r_2} R_{\text{clad}}(r) R_{\text{core}}^*(r) r dr \times \int_0^{2\pi} e^{i(m_{\text{clad}} - m_{\text{core}})\theta} d\theta, \quad (1.2)$$

where m_{clad} and m_{core} are the azimuthal indices of the two modes. The azimuthal integral vanishes whenever $m_{\text{clad}} \neq m_{\text{core}}$: modes with different azimuthal order are orthogonal, and their coupling is suppressed by symmetry regardless of their spatial overlap [3] [CC 18].¹ By engineering the cladding geometry so that the cladding modes carry a high azimuthal index m while the fundamental core mode has $m \approx 0$, the phase-mismatch term in Eq. 1.2 strongly suppresses the coupling over a broad spectral range.

Because IC guidance is based on local mode interactions rather than on a global photonic bandgap, IC fibers can provide broadband transmission compared with PBG fibers, whose bandwidth is limited by the spectral range of the bandgap [3].

1.1.3 Kagome-Lattice Hollow-Core Fibers

The Kagome-lattice fiber is a primary realization of the Inhibited Coupling guiding mechanism [3]. Its cladding is a trihexagonal tiling, formed by a network of thin silica capillaries that create a periodic pattern of large hexagonal and smaller triangular interstitial air holes (see Fig. 1.3a).

Confinement in this regime is achieved through the two suppression strategies identified in Section 1.1.2. The thin silica struts support cladding modes with a highly oscillatory transverse phase, characterized by a high azimuthal index number m , while the fundamental core mode features a slowly varying, nearly Gaussian profile with $m \approx 0$. The strong mismatch in m makes the azimuthal integral in Eq. 1.2 vanish, so that the core mode cannot couple into the surrounding glass network despite the spectral overlap with the cladding continuum.

¹In an idealized axisymmetric model, the azimuthal integral vanishes for modes with different azimuthal indices. In a real Kagome fiber, the discrete cladding geometry breaks perfect cylindrical symmetry, so the suppression of coupling is approximate and depends on the detailed modal overlap and phase matching.

MD typo: Se riesci a tenere tutto sulla stessa riga è meglio

[CC 17] CC sulla nota MD “formula evidenziata”: CONFERMO, e' solo tipografico.

MD typo: metti la footnote prima della citazione, o almeno prima del punto.

[CC 18] CC sulla nota MD “overlap ”: AMMORBIDIREI: e' una convenzione, non un errore. In inglese il richiamo di nota va DOPO la punteggiatura, quindi “overlap [12].¹” com'e' adesso e' gia' corretto; metterlo prima del punto e' la convenzione italiana e francese. Se la tesi e' in inglese, lascerei.

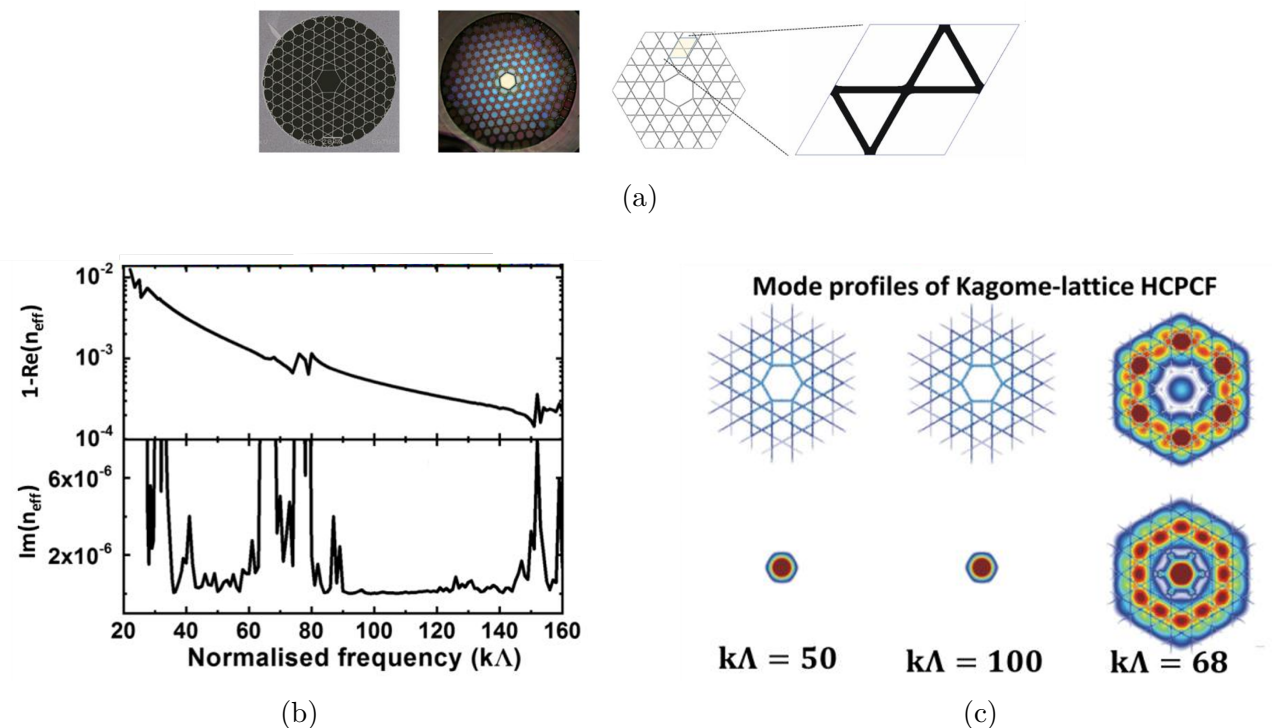


Figure 1.3: Overview of guidance in a hypocycloid-core Kagome fiber. **(a)** Scanning electron microscopy micrographs and structural unit cell. **(b)** Real and imaginary parts of the effective index of the fundamental core mode as a function of the normalized frequency $k\Lambda$: $\text{Im}(n_{\text{eff}})$, proportional to the propagation loss, remains low except at a series of sharp resonance peaks. **(c)** Transverse intensity profile of the same mode at three representative frequencies: tight confinement at $k\Lambda = 50$ and $k\Lambda = 100$, and loss of confinement at the resonance $k\Lambda = 68$. Credits [3].

This coupling suppression is not, however, absolute across the entire spectrum. The silica struts behave as thin dielectric slabs, and at the wavelengths for which a slab becomes resonant its transverse phase matches that of the core mode leading to hybridization. These discrete resonances produce the sharp loss peaks visible in Fig. 1.3b. Their location follows from the transverse resonance condition of a dielectric slab of thickness t and index n_g surrounded by air. Requiring the optical round-trip phase inside the slab to be an integer multiple of 2π , and accounting for the phase accumulated at the air–glass interfaces^[CC 19] at grazing incidence (the regime relevant to a hollow core), i.e.

$$2 \left(\frac{2\pi}{\lambda} \sqrt{n_g^2 - 1} \right) t = 2\pi j, \quad (1.3)$$

yields the resonance condition [3]

$$\lambda_j = \frac{2t\sqrt{n_g^2 - 1}}{j}, \quad j = 1, 2, 3, \dots, \quad (1.4)$$

where j is the radial mode order of the strut. Equivalently, in terms of the normalized frequency

[CC 19] CC nota: Questo inciso non corrisponde al conto scritto subito dopo: l'equazione impone solo che la fase di andata e ritorno trasversale dentro la lastra sia multipla di 2π , e di sfasamenti alle interfacce non ne contiene nessuno. Il risultato $\lambda_j = 2t\sqrt{n_g^2 - 1}/j$ resta giusto, quindi non e' il conto a essere sbagliato: e' la frase che promette un ingrediente assente. O si toglie l'inciso, o si dice che agli angoli radenti i due sfasamenti si compensano e non spostano la condizione.

$$k\Lambda = (2\pi/\lambda)\Lambda,$$

$$k\Lambda = \frac{j\pi\Lambda}{t\sqrt{n_g^2 - 1}}. \quad (1.5)$$

At these wavelengths the strut is resonant and transmits rather than reflects the transverse field, so the core mode leaks into the cladding and the confinement breaks down, as shown at $k\Lambda = 68$ in Fig. 1.3c. Between consecutive resonances the slab is antiresonant and acts as a high reflector: the m -mismatch is restored and the light is tightly localized in the core (e.g. at $k\Lambda = 50$ or 100). Because the resonance wavelengths scale linearly with t , fabricating fibers with nanoscale glass webs pushes the resonances toward shorter wavelengths, thereby opening ultra-broadband transmission windows in the spectral region of interest.

To reduce confinement loss^[CC 20] the core boundary can be engineered with a hypocycloidal (or negative-curvature) profile by incorporating a series of inward-pointing glass arcs (as depicted in Fig. 1.1). This geometry increases the phase mismatch and reduces the overlap between the core mode and the surrounding silica [3].

Higher order modes Similar to standard hollow capillaries and conventional fibers, the core of a Kagome IC fiber supports multiple transverse modes^[CC 21], denoted by the $LP_{m,n}$ notation where m and n represent the azimuthal and radial mode numbers.

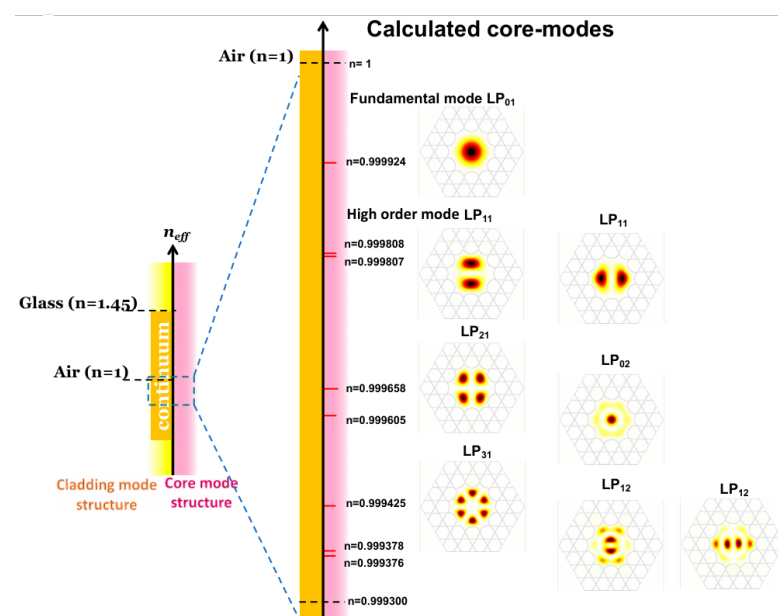


Figure 1.4: Calculated modal structure of an IC-HCPCF, mapping the fundamental LP_{01} mode and higher-order modes against the continuous cladding modal spectrum.

Fig. 1.4 illustrates this modal hierarchy^[CC 22]. Higher-order modes (such as LP_{11} or LP_{02}) exist but experience much higher leakage. Their electromagnetic fields extend radially closer to the silica boundaries, which increases the spatial overlap with the cladding modes, and their non-zero azimuthal index (like $m = 1$ for the LP_{11} mode) reduces the phase mismatch. Thus, while

MD suggestion: aggiungerei una virgola qui

[CC 20] CC sulla nota MD “loss”: CONFERMO. Frase infinitiva introduttiva: la virgola ci vuole.

MD note: dipende dal waist e dalla lunghezza d’onda tramite le funzioni di Bessel. Per core sufficientemente piccoli sono singolo modo anche loro

[CC 21] CC sulla nota MD “the core of a Kagome IC...”: CORREGGO in parte. La frase della tesi e’ giusta e la conclusione della nota no: in un core CAVO non esiste un vero taglio modale. Tutti i modi sono leaky (Marcatili-Schmeltzer, gia’ in bibliografia come Marcatili1964) con perdita $\propto u_{mn}^2 \lambda^2 / R^3$; rimpicciolire il core non elimina i modi di ordine superiore, li rende solo piu’ dissipativi. E’ quello che la tesi dice correttamente poche righe sotto. L’osservazione sulle funzioni di Bessel vale per la struttura modale, ma non porta a una condizione di singolo modo tipo parametro V .

MD note: immagino avrai preso l’immagine da un paper, per cui ci vorrebbero i credits

[CC 22] CC sulla nota MD “illustrates this modal hierarchy”: CONFERMO, verificato: e’ l’unica figura della sezione senza “Credits”; tutte le altre ce l’hanno.

the fiber inherently supports a multimode continuum, if properly designed it can behave as a single-mode waveguide over macroscopic distances^[CC 23] due to the attenuation of higher-order modes [3].

MD note: dipende molto anche dall’iniezione, perché nell’iniezione il tuo modo viene scomposto nella base dei modi della fibra e se è già in un singolo modo (anche non fondamentale) ci rimane in prima approssimazione.

[CC 23] CC sulla nota MD “if properly designed it can behave...”: CONFERMO.
Le condizioni di iniezione contano quanto l’attenuazione differenziale, e la tesi non le nomina.

1.2 Electromagnetic Trapping of Neutral Atoms

[CC 24]

1.2.1 The Magneto-Optical Trap

The Magneto-Optical Trap (MOT) is a technique used to simultaneously confine and cool neutral atoms. It relies on the combination of a position-dependent restoring force and a velocity-dependent damping force[CC 25] [6].

Spatial confinement is produced by a quadrupole magnetic field, generated by a pair of anti-Helmholtz coils[CC 26]. The field is zero[CC 27] at the center of the trap and grows linearly along each direction, with a gradient that induces a position-dependent Zeeman shift of the atomic energy levels. Three pairs of counter-propagating laser beams, red-detuned from the atomic resonance, are sent along the three orthogonal axes. Within each pair, the two beams carry opposite circular polarizations, σ^+ and σ^- , selected so that the beam pushing toward the center is the one brought into resonance by the local Zeeman shift. As an atom drifts away from the origin, the Zeeman shift brings it closer to resonance with the inward-propagating beam, producing a restoring radiation pressure that pushes the atom back toward the center [6]. A schematic representation of the MOT is shown in Fig. 1.5

The cooling mechanism operating inside the MOT is known as[CC 28] optical molasses [8]. It is generated by the same three pairs of counter-propagating beams used for confinement, when their action is considered in the absence of the magnetic field gradient. The beams are slightly red-detuned from the atomic resonance: when an atom moves, the laser beam opposing its trajectory is Doppler-shifted closer to resonance. The atom therefore absorbs more photons from the opposing beam than from the co-propagating one, resulting in a velocity-dependent friction force[CC 29] that viscously damps the atomic motion.

During this continuous molasses cooling, a competing heating mechanism arises from the spontaneous emission of photons. After absorbing a photon, the atom returns to its ground state by spontaneously re-emitting a photon in a random direction. Each emission imparts a small momentum kick (recoil) to the atom; this random walk in momentum space leads to a diffusion of the atomic velocities and heats the atomic cloud. The thermal equilibrium established between the viscous damping of the molasses (cooling) and the random recoils from spontaneous emission (heating) defines the Doppler temperature limit[CC 30] [8]:

MD note: questa è l’interpretazione col modellino masa-molla-smorzatore, ma tecnicamente sarebbe più corretto parlare di probabilità di interazione. La forza diventa una proprietà statistica del sistema, nel senso che la osserviamo come una media su molti cicli di eccitazioni e de-eccitazioni, sfruttando l’isotropia dell’emissione e l’anisotropia dell’assorbimento.

MD suggestion: io direi ”a pair of coils in anti-Helmholtz configuration”

MD note: il campo è nullo al centro solo se era già nullo, per cui io specificherei ”generated field”

MD note: è il Doppler cooling fintanto che è MOT (in cui appunto c’è il campo magnetico e c’è la trappola). La melassa è quando si spengono le bobine di quadrupolo che appunto togliendo la trappola danno vita ad una fase in cui gli atomi si comportano come si fossero in una melassa

MD note: decisamente non è una friction force. Al massimo è una forza efficace di melassa/resistenza fluidodinamica, perché dipende dalla velocità invece di essere costante. E non è una forza se non in senso statistico. La puoi chiamare ”effective force”, magari ”effective dissipative molasses-like damping force”

[CC 24] **CC nota:** Titolo sfuggito alla revisione, ed e’ il peggiore del capitolo: sfora il margine destro di 39.33 pt nel layout finale A4, il doppio di “...Hollow-Core Optical Fibers” che invece era stato segnalato. Stessa causa (**titlesec** giustifica le intestazioni) e stesso rimedio, gia’ applicato in **preamble.tex**. Con la stessa misura sfiorano anche “Coupling to the Motional ...” qui nel capitolo 1 e “Upper Breadboard Setup and Conveyor Belt” nel capitolo 2.

[CC 25] **CC sulla nota MD “It relies on the combination of..”:** CONFERMO in parte, ma sposterei l’accento. La forza di pressione di radiazione E’ una forza media legittima, $F = \hbar k \Gamma_{sc}$, e si scrive cosi’ ovunque: dire che “non e’ una forza” e’ troppo. Il limite vero e’ un altro, ed e’ piu’ utile: la forma “richiamo elastico piu’ smorzamento” vale solo per piccoli spostamenti e basse velocita’ ($k v \ll \Gamma$, $\mu’ B’ z / \hbar \ll \Gamma$); fuori da li’ la forza del MOT e’ fortemente non lineare e puo’ cambiare segno.

[CC 26] **CC sulla nota MD “anti-Helmholtz coils”:** CONFERMO.

[CC 27] **CC sulla nota MD “field is zero”:** CONFERMO, ed e’ un punto pratico: e’ esattamente il motivo per cui esistono le bobine di compensazione.

[CC 28] **CC sulla nota MD “known as”:** CONFERMO: e’ il rilievo piu’ importante della serie, ed e’ un errore concettuale vero. Una precisazione sulla nota: la melassa (Chu, 1985) e’ anteriore al MOT e non si definisce come “spegnere le bobine”, e’ semplicemente la configurazione a sei fasci a campo nullo.

[CC 29] **CC sulla nota MD “friction force”:** CORREGGO. “Friction force”, con coefficiente α in $F = -\alpha v$, e’ il termine standard in Metcalf & van der Straten, citato in questa stessa frase, e in Foot e Dalibard. E l’argomento della nota si rovescia: la dipendenza dalla velocita’ e’ proprio cio’ che rende l’attrito VISCOSO (quello costante e’ l’attrito secco), e la frase dice gia’ “viscously damps”. La parte difendibile e’ solo che si tratta di una media, che pero’ e’ gia’ coperta dalla nota sul MOT qui sopra.

[CC 30] **CC riferimenti:** Rilievo sulla bibliografia, messo qui perche’ e’ la prima citazione a Metcalf. In **bibliography.bib** ci sono voci DOPPIE per lo stesso lavoro sotto due schemi di chiavi: Metcalf & van der Straten e’ sia **Metcalf99** sia **ref23**, Dalibard & Cohen-Tannoudji sia **Dalibard89** sia **ref25**, Steck sia **SteckRb87** sia **ref30**. Finche’ si cita solo la prima di ogni coppia non si vede nulla; il giorno che se ne cita una della seconda serie, lo stesso lavoro compare due volte con due numeri. In tutto ci sono 19 voci mai citate, 9 delle quali con chiavi segnaposto (**ref20**, **ref27**, ...).

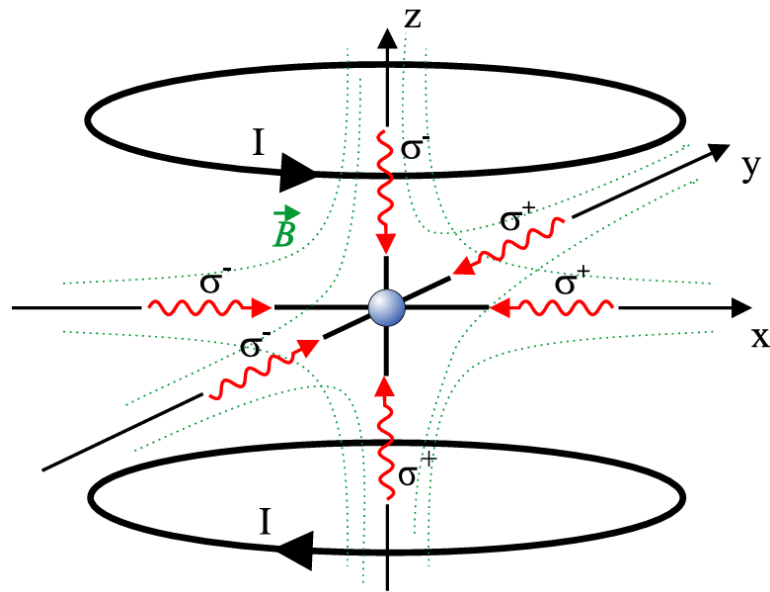


Figure 1.5: Schematic representation of the Magneto-Optical Trap (MOT) configuration, illustrating the counter-propagating laser beams with alternating σ^+/σ^- polarizations and the anti-Helmholtz coils used to generate the magnetic quadrupole field. From [7]

$$T_D = \frac{\hbar\Gamma}{2k_B} \quad (1.6)$$

where $\hbar$ is the reduced Planck constant, Γ is the natural linewidth of the atomic transition, and k_B is the Boltzmann constant. This expression corresponds to the minimum achievable under Doppler cooling^[CC 31] and is obtained for an optimal detuning $\Delta = -\Gamma/2$. For ^{87}Rb atoms on the D2 line, it corresponds to a temperature of approximately $146 \mu\text{K}$.

MD question: Sei sicura? Io credo che sia un ordine di grandezza indicativo, anche considerando che il sistema non è all'equilibrio termodinamico e che appunto ha poco senso parlare di temperatura per un sistema non in equilibrio

1.2.2 Polarization Gradient Cooling

While the MOT cools atoms down to the Doppler limit, further temperature reduction requires Polarization Gradient Cooling (PGC), commonly referred to as Sisyphus cooling. Two main configurations of PGC exist, depending on the relative polarizations of the counter-propagating beams: the $\text{lin}\perp\text{lin}$ geometry, in which the two beams have orthogonal linear polarizations, and the $\sigma^+\sigma^-$ geometry, in which the beams have opposite circular polarizations. The two configurations give rise to distinct polarization patterns and to correspondingly distinct cooling dynamics. In the following, the discussion is restricted to the $\text{lin}\perp\text{lin}$ case, which provides the most direct illustration of the Sisyphus mechanism [9].

The spatial interference of two counter-propagating beams with orthogonal linear polarizations generates a standing wave with a spatially varying polarization state. Over a distance of $\lambda/2$, the local polarization cycles through linear, circular, and orthogonal linear states. For atoms

[CC 31] CC sulla nota MD “This expression corresponds to the minimum...”: RISPONDO: la tesi ha ragione. Il limite Doppler è esatto entro la teoria a due livelli, bassa intensità e basse velocità, e la distribuzione stazionaria degli impulsi è gaussiana, quindi la temperatura è ben definita come STATO STAZIONARIO. Che non sia equilibrio termodinamico è vero e vale un inciso, ma non è “un ordine di grandezza”. Verificato anche il numero: con $\Gamma/2\pi = 6.0666 \text{ MHz}$ viene $145.6 \mu\text{K}$, quindi “approximately $146 \mu\text{K}$ ” è giusto. Il qualificatore che manca davvero è “per un atomo a due livelli”: gli alcalini scendono sotto grazie ai gradienti di polarizzazione, che è l'argomento della sottosezione successiva.

with a degenerate ground state, the light shift (AC Stark shift) depends on the local polarization and on the specific Zeeman sublevel m_F . As an atom moves through this optical field, it climbs a potential hill created by the spatially varying light shift, converting its kinetic energy into potential energy [9].

Upon reaching the peak of the potential hill, the local polarization drives an optical pumping transition that transfers the atom into a lower-energy sublevel.^[CC 32] The spontaneously emitted photon carries away the excess potential energy, leaving the atom at the minimum of a new potential valley. A schematic representation of this process is depicted in Fig.^[CC 33] 1.6. This continuous cycle of ascending potential gradients and undergoing subsequent optical pumping dissipates the atom's kinetic energy^[CC 34], resulting in temperatures significantly below the Doppler limit.

The lowest temperatures achievable through PGC are limited by the recoil energy associated with the emission of a single photon. Defining the recoil energy as $E_R = \hbar^2 k^2 / (2m)$, with k the photon wave vector and m the atomic mass, the definition for the corresponding recoil temperature is

$$T_R = \frac{\hbar^2 k^2}{2mk_B} = \frac{E_R}{k_B}. \quad (1.7)$$

Temperatures of the order of a few^[CC 35] T_R represent the practical lower bound for PGC. At this scale, the thermal kinetic energy of the atom becomes comparable to the energy of a single photon recoil, and the Sisyphus cooling cycle can no longer extract energy efficiently without re-heating the atom through the spontaneous emission process itself. Reaching temperatures below this threshold requires sub-recoil cooling techniques.

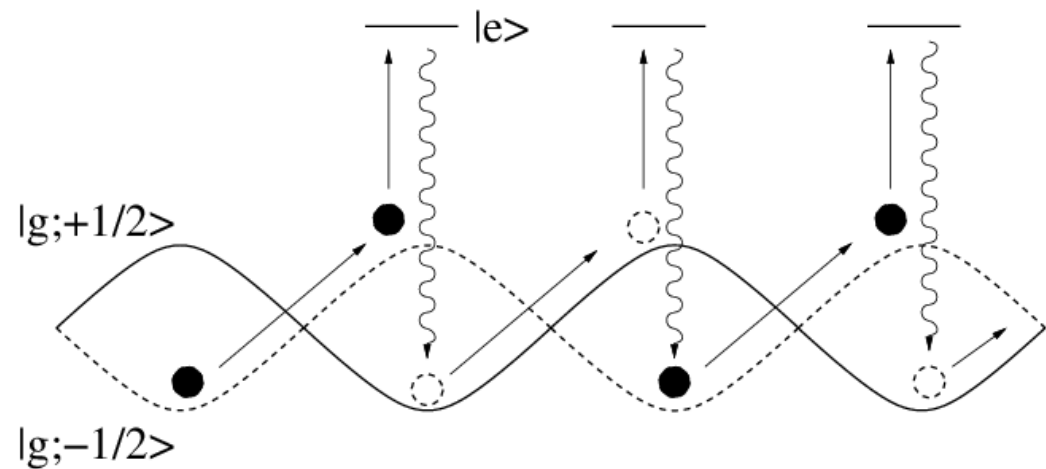


Figure 1.6: *Schematic representation of Polarization Gradient Cooling (Sisyphus cooling). The diagram illustrates the position-dependent light shifts of the ground-state Zeeman sublevels and the optical pumping process that dissipates the atom's kinetic energy.*

MD note: anche qui sono effetti medi

MD note: on average

[CC 32] CC sulla nota MD “Upon reaching the peak of the...”: CONFERMO, e la renderei operativa: il RATE di pompaggio e' massimo dove e' massimo il light shift, quindi l'atomo viene pompato con maggiore PROBABILITA' vicino alla cima, non sulla cima.

[CC 33] CC riferimenti: La figura del Sisifo non ha i credits, e il nome del file (Sisyphus-cooling-mechanism.png) suggerisce una fonte esterna. Verificato sull'intero capitolo: le figure senza credito sono cinque, e questa e' quella che piu' probabilmente viene da un articolo. Le altre del capitolo il credito ce l'hanno, quindi la mancanza salta all'occhio.

[CC 34] CC sulla nota MD “the atom's kinetic energy”: RIDONDANTE con la nota due frasi sopra. Sono quattro note sullo stesso punto (media statistica) in una pagina e mezza: accorpandole si legge meglio e il punto pesa di piu'.

[CC 35] CC nota: Conviene dichiarare quale convenzione si sta usando: qui $T_R = E_R/k_B$, mentre molti testi (Metcalf compreso) definiscono $k_B T_r = \hbar^2 k^2 / m$, cioe' $T_r = 2E_R/k_B$. Finche' si scrive “qualche T_R ” la differenza si nasconde nel “qualche”, ma nel confronto con un numero preso da un articolo il fattore 2 conta.

1.2.3 The Optical Dipole Trap

In contrast to the dissipative radiation-pressure forces that underlie the MOT, an optical dipole trap (ODT) confines neutral atoms in a nearly conservative potential produced by far-off-resonant light. The mechanism **relies on the interaction between the intensity gradient of the light field and the atomic dipole moment that the field itself induces**^[CC 36] [10]. Because the optical dipole interaction is weak compared with the radiative forces used in a MOT, typical trap depths lie in the millikelvin range or below; atoms must therefore be pre-cooled (through the mechanisms described above) before they can be transferred into an ODT.

MD suggestion: non so quanto sia corretto dire che il gradiente di un campo "interagisca" con momento di dipolo

[CC 36] CC sulla nota MD “**relies on the interaction between the...**”: CONFERMO, ed e' piu' forte di cosi'. L'interazione e' fra dipolo indotto e campo, $U_{\text{dip}} = -\frac{1}{2}\langle \mathbf{p} \cdot \mathbf{E} \rangle$; il gradiente dell'intensita' da' la FORZA. Le equazioni del potenziale e della forza di dipolo, due paragrafi sotto, fanno gia' questa distinzione: la frase d'apertura le contraddice.

1.2.3.1 Oscillator model and semiclassical treatment

The essential features of the optical dipole force can be derived by treating the atom as a classical damped oscillator driven by a classical oscillating electric field. The laser field $\mathbf{E}(\mathbf{r}, t) = \hat{\mathbf{e}} \tilde{E}(\mathbf{r}) e^{-i\omega t} + \text{c.c.}$ induces a dipole moment $\mathbf{p}(\mathbf{r}, t) = \hat{\mathbf{e}} \tilde{p}(\mathbf{r}) e^{-i\omega t} + \text{c.c.}$ whose amplitude is proportional to the field amplitude through the complex atomic polarizability $\alpha(\omega)$,

$$\tilde{p} = \alpha(\omega) \tilde{E}. \quad (1.8)$$

The interaction potential of the induced dipole in the driving field is

$$U_{\text{dip}}(\mathbf{r}) = -\frac{1}{2} \langle \mathbf{p} \cdot \mathbf{E} \rangle = -\frac{1}{2\epsilon_0 c} \text{Re}(\alpha) I(\mathbf{r}), \quad (1.9)$$

where the angular brackets denote time averaging over the optical period, $I = 2\epsilon_0 c |\tilde{E}|^2$ is the field intensity, and the factor 1/2 accounts for the dipole being induced rather than permanent [10]. The potential is proportional to the real (dispersive) part of α , which describes the in-phase component of the dipole oscillation. The resulting dipole force

$$\mathbf{F}_{\text{dip}}(\mathbf{r}) = -\nabla U_{\text{dip}}(\mathbf{r}) = \frac{1}{2\epsilon_0 c} \text{Re}(\alpha) \nabla I(\mathbf{r}) \quad (1.10)$$

is conservative and proportional to the intensity gradient.

Concurrently, the driven oscillator absorbs power from the field and re-emits it as dipole radiation. The absorbed power

$$P_{\text{abs}}(\mathbf{r}) = \langle \dot{\mathbf{p}} \cdot \mathbf{E} \rangle = \frac{\omega}{\epsilon_0 c} \text{Im}(\alpha) I(\mathbf{r}) \quad (1.11)$$

is proportional to the imaginary (absorptive) part of α , describing the out-of-phase component of the dipole. Interpreting the absorption as a stream of photons of energy $\hbar\omega$, the corresponding

spontaneous scattering rate is [10]

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{P_{\text{abs}}}{\hbar\omega} = \frac{1}{\hbar\epsilon_0 c} \text{Im}(\alpha) I(\mathbf{r}). \quad (1.12)$$

To obtain an explicit expression for $\alpha(\omega)$, the atom is first modeled in Lorentz's picture as an electron of mass m_e and charge $-e$ elastically bound to the core with eigenfrequency ω_0 , damped by radiative energy loss. Integration of the equation of motion $\ddot{x} + \Gamma_\omega \dot{x} + \omega_0^2 x = -eE(t)/m_e$ yields [10]

$$\alpha = \frac{e^2}{m_e} \frac{1}{\omega_0^2 - \omega^2 - i\omega\Gamma_\omega}, \quad (1.13)$$

where $\Gamma_\omega = e^2\omega^2/(6\pi\epsilon_0 m_e c^3)$ is the classical damping rate from Larmor's formula. In the semiclassical treatment the same functional form is recovered, the only modification being that the damping rate is no longer given by Larmor's formula but is determined by the quantum-mechanical dipole matrix element between ground and excited state [10]:

$$\Gamma = \frac{\omega_0^3}{3\pi\epsilon_0 \hbar c^3} |\langle e|\hat{\mu}|g\rangle|^2. \quad (1.14)$$

For the D lines of the alkali atoms Na, K, Rb, and Cs, the classical result of ^[CC 37] Eq. 1.13 agrees with the true decay rate to within a few percent. Expressing the polarizability in terms of this quantum-mechanical Γ gives [10]

$$\alpha(\omega) = 6\pi\epsilon_0 c^3 \frac{\Gamma/\omega_0^2}{\omega_0^2 - \omega^2 - i(\omega^3/\omega_0^2)\Gamma}. \quad (1.15)$$

Substituting Eq. 1.15 into Eqs. 1.9 and 1.12 yields the general expressions [10]

$$U_{\text{dip}}(\mathbf{r}) = -\frac{3\pi c^2}{2\omega_0^3} \left(\frac{\Gamma}{\omega_0 - \omega} + \frac{\Gamma}{\omega_0 + \omega} \right) I(\mathbf{r}), \quad (1.16)$$

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{3\pi c^2}{2\hbar\omega_0^3} \left(\frac{\omega}{\omega_0} \right)^3 \left(\frac{\Gamma}{\omega_0 - \omega} + \frac{\Gamma}{\omega_0 + \omega} \right)^2 I(\mathbf{r}). \quad (1.17)$$

These expressions are valid for any driving frequency and contain two resonant contributions: the one at $\omega = \omega_0$ and the counter-rotating term resonant at $\omega = -\omega_0$. In most trapping experiments the laser is tuned close to ω_0 with detuning $\Delta \equiv \omega - \omega_0$ satisfying $|\Delta| \ll \omega_0$; the counter-rotating term can then be neglected in the rotating-wave approximation (RWA), and one may set $\omega/\omega_0 \simeq 1$. Equations 1.16–1.17 then reduce to [10]

$$U_{\text{dip}}(\mathbf{r}) = \frac{3\pi c^2}{2\omega_0^3} \frac{\Gamma}{\Delta} I(\mathbf{r}), \quad (1.18)$$

[CC 37] CC errore: Il rimando e' sbagliato: l'equazione richiamata (eq:polarizability_lorentz) e' la POLARIZZABILITA', non un tasso di decadimento. L'affermazione di Grimm riguarda il tasso di smorzamento classico di Larmor Γ_ω , definito nella riga subito sotto quell'equazione.

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{3\pi c^2}{2\hbar\omega_0^3} \left(\frac{\Gamma}{\Delta}\right)^2 I(\mathbf{r}). \quad (1.19)$$

1.2.3.2 Quantum-mechanical picture

The same potential arises in the quantum description as an energy-level shift induced by the off-resonant field. The effect of far-detuned laser light can be treated as a perturbation of second order in the electric field, linear in the intensity. Within the dressed-atom **approach**^[CC 38], the unperturbed states of the combined atom–photon system are considered: in the ground state the atom has zero internal energy and the field carries $n\hbar\omega$, so $E_i = n\hbar\omega$; after absorption of one photon the atom is in the excited state with internal energy $\hbar\omega_0$ and the field carries $(n-1)\hbar\omega$, giving $E_j = \hbar\omega_0 + (n-1)\hbar\omega = -\hbar\Delta + n\hbar\omega$. The energy denominator is therefore $E_i - E_j = \hbar\Delta$. For low saturation, the second-order shift of the ground state due to the coupling with the excited state $|e\rangle$ through the dipole operator $\hat{\mu}$ reads [10]

$$\Delta E = \frac{|\langle e|\hat{\mu}|g\rangle|^2}{\hbar\Delta} |\tilde{E}|^2 = \frac{3\pi c^2}{2\omega_0^3} \frac{\Gamma}{\Delta} I(\mathbf{r}), \quad (1.20)$$

where the dipole matrix element has been replaced by Γ via Eq. 1.14. This perturbative result coincides with the semiclassical dipole potential of Eq. 1.18 [10]: the AC Stark shift of the ground state is the dipole potential, while the excited state experiences the opposite shift. Since in the low-saturation regime the atom resides predominantly in the ground state, the light-shifted ground state acts as the effective conservative potential for the atomic motion. A spatially varying intensity, such as the Gaussian profile of a focused beam, produces a position-dependent shift and hence a trapping potential, as illustrated in Fig. 1.7.

MD suggestion: io userei "framework"

[CC 38] CC sulla nota MD “**approach**”: CONFERMO, indifferente. In letteratura la collocazione piu’ frequente e’ “dressed-atom picture”.

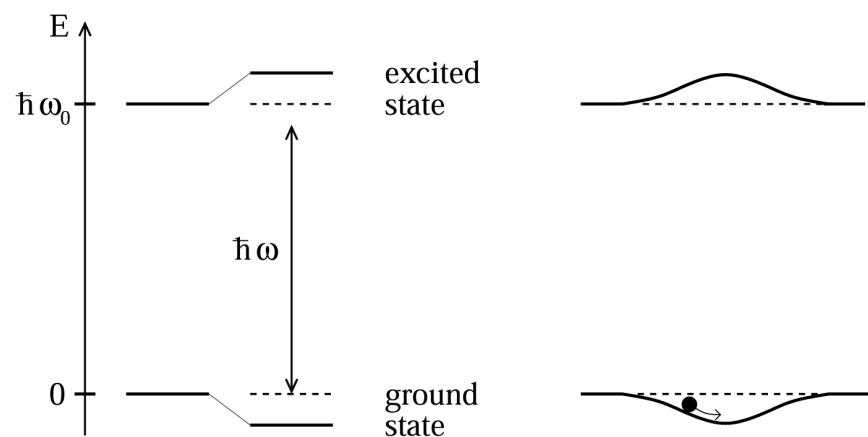


Figure 1.7: *Light shifts for a two-level atom. Left: red-detuned light ($\Delta < 0$) shifts the ground state down and the excited state up by equal amounts. Right: a spatially inhomogeneous field such as a Gaussian laser beam produces a ground-state potential well in which an atom can be trapped.*

The sign of the detuning determines the trapping geometry. For a red-detuned field ($\Delta < 0$) the ground state is shifted downward, yielding an attractive potential that confines atoms near intensity maxima; for a blue-detuned field ($\Delta > 0$) the shift is positive and atoms are pushed toward intensity minima, where spontaneous scattering is also reduced.

Combining Eqs. 1.18–1.19 gives the relation

$$\hbar\Gamma_{\text{sc}} = \frac{\Gamma}{\Delta} U_{\text{dip}}, \quad (1.21)$$

a direct consequence of the link between the absorptive and dispersive response of the oscillator [10]. Since the dipole potential scales as I/Δ while the scattering rate scales as I/Δ^2 , a deep potential can be maintained at comparatively low scattering, and thus low heating and decoherence, by using high intensity together with large detuning.

1.2.3.3 Multi-level atoms and the alkali D -lines

Real alkali atoms possess a fine and hyperfine structure that are neglected in the two-level model. The state-dependent dipole potential is then obtained from second-order time-independent perturbation theory. For a non-degenerate ground state $|g_i\rangle$, the energy shift is [10]

$$\Delta E_i = \sum_{j \neq i} \frac{|\langle e_j | \hat{\mu} | g_i \rangle|^2}{E_i - E_j} |\tilde{E}|^2, \quad (1.22)$$

where the sum runs over all electronically excited states $|e_j\rangle$. By the Wigner–Eckart theorem, each dipole matrix element factorizes into a reduced matrix element $\|\mu\|$, depending only on the orbital wavefunctions, and a real transition coefficient c_{ij} encoding the angular-momentum geometry and the laser polarization, $\mu_{ij} = c_{ij}\|\mu\|$. Since $\|\mu\|$ is directly related to Γ through Eq. 1.14, the ground-state shift becomes [10]:

$$\Delta E_i = \frac{3\pi c^2 \Gamma}{2\omega_0^3} I(\mathbf{r}) \sum_j \frac{c_{ij}^2}{\Delta_{ij}}, \quad (1.23)$$

with Δ_{ij} the detuning from the $i \rightarrow j$ transition. The dipole potential is therefore a sum over all coupled excited states, weighted by their line-strength factors c_{ij}^2 and inverse detunings.

For alkali metals the dominant contributions come from the D_1 ($nS_{1/2} \rightarrow nP_{1/2}$) and D_2 ($nS_{1/2} \rightarrow nP_{3/2}$) fine-structure lines [10]; higher-lying transitions lie tens of THz away^[CC 39] and contribute negligibly in the near-infrared trapping regime used in this work. Under the assumption that the optical detuning is large compared with the excited-state hyperfine splitting, so that the resolved hyperfine components of each fine-structure line can be replaced by their weighted center, the line-strength sum rules allow Eq. 1.23 to be evaluated in closed form

[CC 39] **CC errore:** Il numero non torna. Per il rubidio le righe D stanno a 780 e 795 nm, cioe' circa 384 THz, e la transizione successiva $5S \rightarrow 6P$ sta a 420 nm, circa 714 THz: la distanza e' di qualche CENTINAIO di THz, non di decine. "Decine di THz" e' invece l'ordine di grandezza della separazione di struttura fine fra D_1 e D_2 (7.1 THz nel Rb), che pero' e' proprio la quantita' che NON si puo' trascurare e che infatti viene tenuta. Cosi' com'e' la frase confonde le due scale.

for a ground state $|F, m_F\rangle$ [10]:

$$U_{\text{dip}}(\mathbf{r}) = \frac{\pi c^2 \Gamma}{2\omega_0^3} \left(\frac{2 + \mathcal{P} g_F m_F}{\Delta_{2,F}} + \frac{1 - \mathcal{P} g_F m_F}{\Delta_{1,F}} \right) I(\mathbf{r}), \quad (1.24)$$

where g_F is the Landé factor, $\mathcal{P}$ describes the laser polarization ($\mathcal{P} = 0$ for linear, $\mathcal{P} = \pm 1$ for $\sigma^\pm$), and $\Delta_{2,F}$, $\Delta_{1,F}$ are the detunings from the centers of the D_2 and D_1 transitions, respectively (Fig. 1.8).

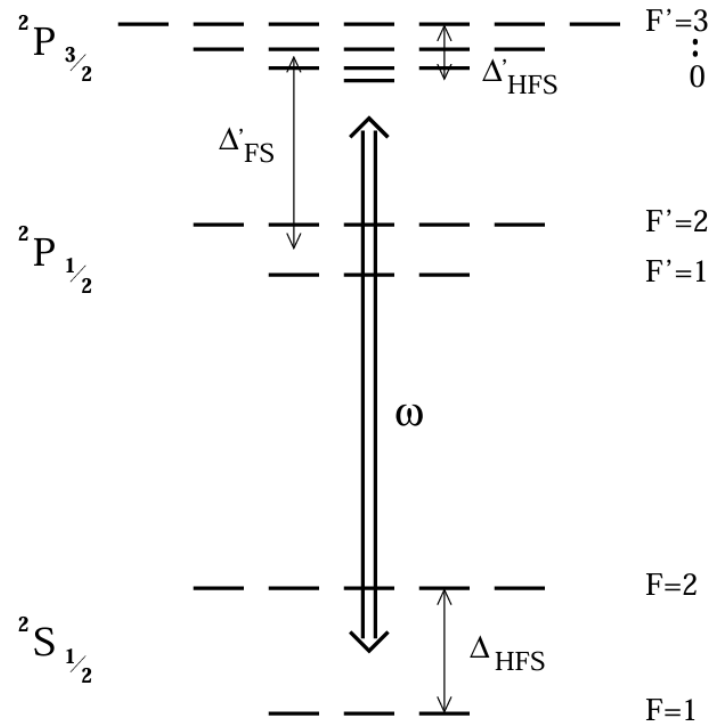


Figure 1.8: *Level scheme of an alkali atom (nuclear spin $I = 3/2$, as in ^{87}Rb) relevant to the dipole-potential calculation. The fine-structure doublet D_1 ($nS_{1/2} \rightarrow nP_{1/2}$) and D_2 ($nS_{1/2} \rightarrow nP_{3/2}$) couples the ground manifold $nS_{1/2}$ to the excited $nP_{1/2}$ and $nP_{3/2}$ manifolds; $\Delta_{1,F}$ and $\Delta_{2,F}$ denote the detunings of the trapping laser from the centers of the two lines. After [10].*

The structure of Eq. 1.24 follows from the line-strength factors of the two transitions. For linear polarization, symmetry requires both electronic ground states $m_J = \pm 1/2$ to be shifted equally; after coupling to the nuclear spin, all magnetic sublevels of a given F remain degenerate, with line-strength factors $2/3$ for the D_2 line and $1/3$ for the D_1 line [10]. These factors appear as the constants 2 and 1 in the numerators of Eq. 1.24 (the common factor $1/3$ being absorbed into the prefactor). For circular polarization, the m_J degeneracy is lifted: the line-strength factors become $(2 \pm g_F m_F)/3$ for D_2 and $(1 \mp g_F m_F)/3$ for D_1 , where the substitution $m_J \rightarrow \frac{1}{2} g_F m_F$ (with $g_J = 2$ for alkali atoms) follows from the analogy with the linear Zeeman effect in weak magnetic fields. This m_F -dependent contribution is the vector light shift, which acts as a fictitious magnetic field along the propagation axis and lifts the degeneracy of the magnetic sublevels. For this reason, linearly polarized light is generally preferred when homogeneous,

state-insensitive confinement is required [10].

For the photon scattering rate, the same line-strength factors enter as for the dipole potential, since absorption and light shifts are governed by the same transition matrix elements. For linear polarization one obtains [10]

$$\Gamma_{\text{sc}}(\mathbf{r}) = \frac{\pi c^2 \Gamma^2}{2\hbar \omega_0^3} \left(\frac{2}{\Delta_{2,F}^2} + \frac{1}{\Delta_{1,F}^2} \right) I(\mathbf{r}). \quad (1.25)$$

The general expression of Eq. 1.24 reduces to the two-level result of Eq. 1.18 in two limiting regimes. When the detuning is much larger than the fine-structure splitting ($|\Delta| \gg |\Delta_{\text{FS}}|$, with $\Delta_{\text{FS}} = \omega_{D_2} - \omega_{D_1}$), the two detunings become nearly equal, $\Delta_{1,F} \simeq \Delta_{2,F} \simeq \Delta$. For linear polarization ($\mathcal{P} = 0$) the numerators add to $2 + 1 = 3$, the total oscillator strength of the D -doublet; absorbing this factor into an effective linewidth^[CC 40] Γ_{eff} , Eq. 1.24 takes the two-level form of Eq. 1.18, with Δ measured from the weighted center of the doublet. In the opposite limit, where the laser is tuned close to one line ($|\Delta_{i,F}| \ll |\Delta_{j,F}|$), only the nearest transition contributes appreciably and the sum collapses to a single term, again yielding the two-level form. In both limits, linear polarization suppresses the vector light shift, so the resulting potential is independent of m_F and is identical in form to the two-level dipole potential. If the detuning additionally exceeds the ground-state hyperfine splitting ($|\Delta| \gg \Delta_{\text{HFS}}$), all sub-states of the electronic ground manifold are shifted by the same amount and the potential becomes completely independent of both m_F and F . This justifies treating the atom as an effective two-level system throughout this work, where far-detuned, linearly polarized beams are used in all trapping configurations.

[CC 40] CC nota: Non serve una larghezza efficace, e nominarla puo' far pensare che $\Gamma_{\text{eff}} \neq \Gamma$. Il conto torna esattamente: il prefattore $\pi c^2 \Gamma / 2\omega_0^3$ per i numeratori che sommano a 3 da' $3\pi c^2 \Gamma / 2\omega_0^3$, identico al prefattore a due livelli, con lo STESSO Γ . Direi solo che il fattore 3 ricostruisce quel prefattore.

1.3 Optical Conveyor Belt

The optical dipole trap discussed in the previous section provides a static conservative potential in which atoms are confined near the focus of a single laser beam. Transporting the trapped cloud over macroscopic distances requires a different architecture, in which the position of the potential minima can be controlled dynamically. The "optical conveyor belt" fulfills this requirement by replacing the single beam with two counter-propagating, phase-coherent beams^[CC 41]: their interference generates a standing wave whose nodes and antinodes can be set into motion by imposing a controlled frequency difference between the two arms. This section derives the geometry of the standing-wave potential, the kinematics of the moving lattice, and the acceleration limits that bound adiabatic transport.

1.3.1 Interference of Counter-Propagating Gaussian Beams and the Stationary Lattice

[CC 42]

MD typo: anech qui sfori a destra, controlla i margini

The fundamental mechanism of the optical conveyor belt relies on the periodic intensity pattern generated by the interference of two counter-propagating laser beams [7]. The resulting standing wave acts as a one-dimensional optical lattice, imposing a tight spatial confinement on atoms via the optical dipole force.

Assuming two coherent Gaussian beams in the fundamental transverse mode propagating along the z -axis, the respective electric fields can be modeled as follows. The first beam, propagating towards $+z$ with angular frequency ω_1 , is described by:

$$E_1(z, \rho, t) = E_0 \frac{w_0}{w(z)} \exp \left(-\frac{\rho^2}{w^2(z)} \right) \exp (i(kz - \omega_1 t + \phi(z))) \tag{1.26}$$

where E_0 denotes the peak field amplitude, $k = 2\pi/\lambda$ the optical wavenumber, $\phi(z)$ the Gouy phase shift^[CC 43], and $\rho = \sqrt{x^2 + y^2}$ the radial coordinate. The beam radius $w(z)$ evolves along the propagation axis according to:

$$w^2(z) = w_0^2 \left(1 + \frac{z^2}{z_R^2} \right), \tag{1.27}$$

with w_0 the waist at the focal plane and $z_R = \pi w_0^2/\lambda$ the Rayleigh length. The second field, counter-propagating towards $-z$ at frequency ω_2 , is given by:

$$E_2(z, \rho, t) = E_0 \frac{w_0}{w(z)} \exp \left(-\frac{\rho^2}{w^2(z)} \right) \exp (i(-kz - \omega_2 t - \phi(z))). \tag{1.28}$$

[CC 41] **CC nota:** "Phase-coherent" da solo non basta: i due fasci devono anche essere CO-POLARIZZATI perche' si formi un reticolo di intensita'. Con polarizzazioni ortogonali l'intensita' totale e' uniforme e si ottiene un gradiente di polarizzazione, cioe' una melassa lin-perp-lin, non un conveyor belt. E' anche un requisito di allineamento reale in laboratorio.

[CC 42] **CC sulla nota MD "titolo 1.3.1":** CONFERMO per il PDF di revisione, ma il contrario nel layout finale. Misurato: 22.48 pt di sfondamento con i margini larghi, ZERO in A4. E' l'opposto del titolo 1.1.1, che sfora solo in A4. Verificato anche che non e' colpa di `\uwave`: lo sfondamento e' identico con e senza. Coperto comunque dal `\raggedright`. Nota di metodo, CC: questa nota stava dentro l'argomento di `\subsection`, che e' un argomento mobile. Il testo della nota finiva stampato verbatim nell'indice, hyperref segnalava "Token not allowed in a PDF string" e il `\todo` veniva eseguito due volte, una dall'indice. L'ho spostata subito DOPO il titolo: il testo della nota e' il tuo, invariato; si perde solo l'evidenziazione della singola parola.

[CC 43] **CC nota:** Due cose. Il valore di $\phi(z)$ non viene mai dato: e' $\arctan(z/z_R)$. E soprattutto, nelle espressioni dei due fasci non compare alcun termine di curvatura del fronte d'onda, $\exp(ik\rho^2/2R(z))$: piu' avanti si legge "dropping wavefront curvature and Gouy phase", ma la curvatura non c'era da eliminare. O la si aggiunge, o si corregge quella frase.

To determine the local intensity profile for degenerate frequencies ($\omega_1 = \omega_2 = \omega$), the coherent superposition $E_{tot} = E_1 + E_2$ is evaluated. Restricting the analysis to the spatial region localized around the focal point ($z \ll z_R$), the variation of the beam waist and the Gouy phase shift become negligible. The superimposed electric field simplifies to:

$$E_{tot}(z, \rho, t) \approx E_0 \frac{w_0}{w(z)} \exp\left(-\frac{\rho^2}{w^2(z)}\right) e^{-i\omega t} [e^{ikz} + e^{-ikz}]. \quad (1.29)$$

Applying Euler's relation, the spatial interference manifests as a real cosine envelope $2\cos(kz)$. The effective optical intensity $I(z, \rho)$ experienced by the atoms is proportional to the time-averaged squared amplitude of the field, $\langle |E_{tot}|^2 \rangle$, which yields a stationary standing wave:

$$I(z, \rho) = I_{\max} \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(kz). \quad (1.30)$$

The peak intensity $I_{\max} = 4P/(\pi w_0^2)$ follows from the total optical power P distributed across the two beams. Each beam carries power^[CC 44] $P/2$ and has a peak intensity $2(P/2)/(\pi w_0^2) = P/(\pi w_0^2)$; the additional factor of 4 in $I_{\max}$ originates from the constructive interference at the antinodes, where the two field amplitudes add in phase.

In the far-detuned regime, where the laser frequency is significantly shifted from any atomic resonance, the resulting dipole force is conservative. The optical potential energy $U(\rho, z)$ is therefore directly proportional to the local intensity distribution:

$$U(\rho, z) = U_0 \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(kz), \quad (1.31)$$

where U_0 defines the maximum depth of the individual potential wells, with $U_0 < 0$ for a red-detuned, attractive trap.

The harmonic spatial modulation introduced by the $\cos^2(kz)$ term imposes a longitudinal periodicity, organizing the optical potential into a one-dimensional lattice of trapping sites with a lattice constant of $\lambda/2$.

Within a potential well, at low temperature, the atomic motion is restricted to a small region around the trap minimum at $z = 0$ and $\rho = 0$, allowing the harmonic approximation. Applying a second-order Taylor expansion to Eq. (1.31) using $\cos^2(kz) \approx 1 - (kz)^2$ and $\exp(-2\rho^2/w_0^2) \approx 1 - 2\rho^2/w_0^2$, the potential takes the quadratic form

$$U(\rho, z) \approx U_0 \left(1 - \frac{2\rho^2}{w_0^2}\right) (1 - k^2 z^2) \approx U_0 - U_0 k^2 z^2 - U_0 \frac{2\rho^2}{w_0^2}. \quad (1.32)$$

Equating these leading-order restoring terms to the classical energies of a harmonic oscillator, $\frac{1}{2}\kappa_z z^2$ and $\frac{1}{2}\kappa_{rad}\rho^2$, yields the effective spring constants $\kappa_z = 2|U_0|k^2$ and $\kappa_{rad} = 4|U_0|/w_0^2$. The

[CC 44] CC nota: Qui si assume implicitamente uno splitting bilanciato. Con potenze diverse nei due bracci l'intensita' e' $I_1 + I_2 + 2\sqrt{I_1 I_2} \cos(2kz)$ e il contrasto del reticolo diventa $2\sqrt{I_1 I_2}/(I_1 + I_2) < 1$: i minimi non vanno piu' a zero e la profondita' utile cala. Vale una riga, perche' l'efficienza di trasporto dipende dalla profondita' e nel setup reale il braccio di ritorno e' quasi sempre piu' debole.

characteristic axial and radial oscillation frequencies therefore read:

$$\Omega_z = \sqrt{\frac{2|U_0|k^2}{m}}, \quad \Omega_{rad} = \sqrt{\frac{4|U_0|}{mw_0^2}}. \quad (1.33)$$

These characteristic frequencies establish the dynamical timescales of the system and set the bound within which external parameters can be varied while preserving adiabaticity.

1.3.2 Geometry of the Trapping Potential

The ratio of the two oscillation frequencies exhibits a geometric dependence, independent of the overall trap depth U_0 :

$$\frac{\Omega_z}{\Omega_{rad}} = \frac{kw_0}{\sqrt{2}} = \frac{\sqrt{2}\pi w_0}{\lambda}. \quad (1.34)$$

In typical experimental configurations the beam waist exceeds the optical wavelength ($w_0 \gg \lambda$), so that the longitudinal confinement dominates over the transverse confinement ($\Omega_z \gg \Omega_{rad}$). The standing wave then imposes quasi-two-dimensional potential wells with a strongly anisotropic, disc-shaped geometry: along the z -axis the atomic motion is localized to a fraction of λ , while the transverse motion retains a comparatively broad spatial extent. This anisotropy suppresses tunneling between adjacent lattice sites^[CC 45] while leaving the transverse dynamics only weakly confined. A schematic representation of the resulting disc-shaped potential wells is shown in Fig. 1.9.

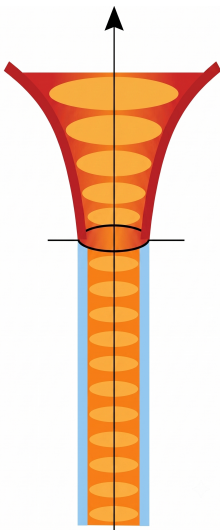


Figure 1.9: *The strongly anisotropic, disc-shaped potential wells of the one-dimensional optical lattice.*

1.3.3 Kinematics of the Moving Standing Wave

Translating the stationary lattice into an active transport potential requires inducing a macroscopic translation of the interference pattern. This is achieved by imposing a controlled frequency difference $\Delta\nu$ between the two counter-propagating laser modes. The dynamic behavior can be derived by applying the detuning either symmetrically across both beams or asymmetrically to a single beam. In both configurations, the coherent superposition of the fields is resolved using the sum-to-product identity $\cos A + \cos B = 2 \cos\left(\frac{A+B}{2}\right) \cos\left(\frac{A-B}{2}\right)$.

[CC 45] CC errore: Attribuzione sbagliata: il tunneling fra siti non e' controllato dal rapporto di anisotropia Ω_z/Ω_{rad} ma dalla PROFONDITA' del reticolo in unita' di ricolo, $|U_0|/E_R$, che fissa la larghezza di banda di Bloch. Un reticolo molto anisotropo ma poco profondo lascia passare il tunneling senza problemi. All'anisotropia compete la forma a disco, non la soppressione del tunneling.

Symmetric detuning. Consider the case in which the detuning is distributed symmetrically, shifting the optical frequencies to $\nu_1 = \nu + \Delta\nu/2$ and $\nu_2 = \nu - \Delta\nu/2$. The corresponding angular frequencies become $\omega_1 = \omega + \pi\Delta\nu$ and $\omega_2 = \omega - \pi\Delta\nu$. Evaluating the scalar electric fields near the focal region (dropping wavefront curvature and Gouy phase), the two beams are expressed as real functions:

$$E_1(z, t) = E_0(z, \rho) \cos(kz - \omega t - \pi\Delta\nu t), \quad (1.35)$$

$$E_2(z, t) = E_0(z, \rho) \cos(-kz - \omega t + \pi\Delta\nu t) = E_0(z, \rho) \cos(kz + \omega t - \pi\Delta\nu t). \quad (1.36)$$

Superposing the two fields, $E_{tot} = E_1 + E_2$, and mapping the arguments to $A = kz - \omega t - \pi\Delta\nu t$ and $B = kz + \omega t - \pi\Delta\nu t$, the sum-to-product identity yields

$$E_{tot}(z, t) = 2E_0(z, \rho) \cos(kz - \pi\Delta\nu t) \cos(-\omega t). \quad (1.37)$$

Because the atomic motion does not follow the rapidly oscillating optical carrier, the interaction can be averaged over one optical cycle, reducing the $\cos^2(-\omega t)$ term to a constant factor of 1/2. The effective intensity, and by extension the conservative trapping potential $U(z, \rho, t)$, is governed by the slowly varying spatial envelope. The static potential thus evolves into a moving periodic lattice:

$$U(z, \rho, t) = U_0 \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(\pi\Delta\nu t - kz). \quad (1.38)$$

Setting $\Delta\nu = 0$ recovers the stationary lattice structure.

Single-beam detuning. In laboratory implementations it is generally simpler to introduce the frequency offset into a single arm. Defining the unshifted frequency as $\nu_1 = \nu$ and the detuned frequency as $\nu_2 = \nu + \Delta\nu$ (yielding angular frequencies $\omega_1 = \omega$ and $\omega_2 = \omega + 2\pi\Delta\nu$), the interacting fields are

$$E_1(z, t) = E_0(z, \rho) \cos(kz - \omega t), \quad (1.39)$$

$$E_2(z, t) = E_0(z, \rho) \cos(-kz - (\omega + 2\pi\Delta\nu)t) = E_0(z, \rho) \cos(kz + \omega t + 2\pi\Delta\nu t). \quad (1.40)$$

Applying the sum-to-product identity with $A = kz - \omega t$ and $B = kz + \omega t + 2\pi\Delta\nu t$ factors the superposition:

$$E_{tot}(z, t) = 2E_0(z, \rho) \cos(kz + \pi\Delta\nu t) \cos(\omega t + \pi\Delta\nu t). \quad (1.41)$$

Upon time-averaging the fast optical component $\cos^2(\omega t + \pi\Delta\nu t) \rightarrow 1/2$, the resulting effective potential is

$$U(z, \rho, t) = U_0 \frac{w_0^2}{w^2(z)} \exp\left(-\frac{2\rho^2}{w^2(z)}\right) \cos^2(kz + \pi\Delta\nu t). \quad (1.42)$$

This expression coincides, up to an overall sign in the time argument of the envelope^[CC 46], with Eq. (1.38), confirming that an asymmetric detuning imposed on a single beam produces

[CC 46] **CC nota:** Il segno non e' cosmetico: inverte la DIREZIONE di trasporto. Nel caso simmetrico l'involuppo e' $\cos^2(\pi\Delta\nu t - kz)$ e il reticolo va verso $+z$; qui e' $\cos^2(kz + \pi\Delta\nu t)$ e va verso $-z$. E la differenza non sta nel detuning simmetrico o su un solo braccio: sta in QUALE braccio porta la frequenza piu' alta. La regola generale, valida in entrambi i casi, e' che il reticolo si muove nel verso di propagazione del fascio a frequenza MAGGIORE, con $|v| = \lambda\Delta\nu/2$. Detta cosi', "produces the same effect" diventa precisa.

the same effect as a symmetrically distributed detuning.

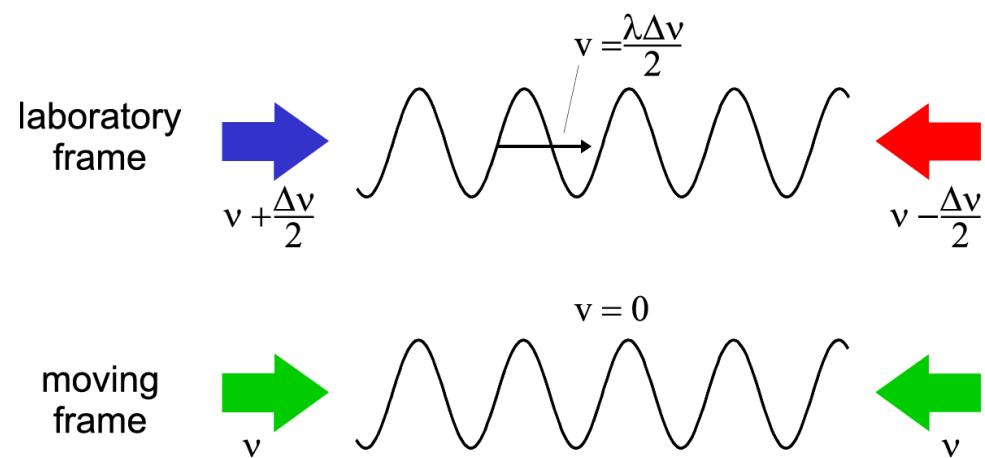


Figure 1.10: *Kinematics of the optical conveyor belt: a mutual detuning $\Delta\nu$ produces a moving standing wave. In the moving reference frame both beams are doppler shifted by the same amount [7].*

The macroscopic velocity of the interference pattern^[CC 47] can be understood by considering a moving reference frame. In a coordinate system translating along the z -axis with velocity v , the Doppler effect causes a red shift of the co-propagating beam and a blue shift of the counter-propagating beam. There exists a specific reference frame in which these Doppler shifts exactly compensate for the frequency difference $\Delta\nu$ imposed in the laboratory frame. In this system, the two beams have identical frequencies, and the standing wave appears stationary [7].

The velocity can also be derived directly in the laboratory frame by tracking a point of constant intensity, i.e. by setting the phase argument of the moving envelope to a constant value, $kz \pm \pi\Delta\nu t = \text{const.}$ Taking the time derivative yields $k dz/dt \pm \pi\Delta\nu = 0$. Substituting $k = 2\pi/\lambda$ and identifying the transport velocity as $v = dz/dt$ gives

$$v = \frac{\lambda\Delta\nu}{2}. \quad (1.43)$$

1.3.4 Trap-Depth Scaling and Adiabatic Compression

The dimensional properties of the trap scale dynamically when optical parameters are varied, for instance during adiabatic compression in which the beam waist is tightened towards w_0 . Under constant optical power P , the trap depth obeys $U_0 \propto I_{\text{max}} \propto P/w_0^2$. Combining this scaling with the results of Eq. (1.33) gives the behavior of the trapping frequencies:

$$\Omega_z \propto \sqrt{U_0} \propto \frac{1}{w_0}, \quad \Omega_{\text{rad}} \propto \frac{\sqrt{U_0}}{w_0} \propto \frac{1}{w_0^2}. \quad (1.44)$$

[CC 47] **CC riferimenti:** Verificato meccanicamente su tutta la tesi: in questa sezione ci sono DUE figure mai richiamate nel testo, quella dei frame del conveyor belt e quella del washboard inclinato (zero occorrenze delle loro \ref). Una figura mai richiamata galleggia dove capita, e sono per giunta le due che illustrano i due punti chiave della sottosezione: il frame in cui l'onda stazionaria e' ferma, e la barriera che si abbassa sotto accelerazione. In tutto il capitolo ne ha tre: la terza e' lo spettro di assorbimento nella sezione EIT.

The quadratic dependence of Ω_{rad} , compared to the linear dependence of Ω_z , induces a deformation during focusing: the anisotropy ratio Ω_z/Ω_{rad} scales directly with w_0 , so the radial confinement tightens faster than the axial confinement and the aspect ratio of the disc-shaped wells changes during compression.

Adiabatic temperature scaling. Provided that the variation of the trap depth remains slow compared to the inverse characteristic frequencies, the action $J \propto E/\Omega$ is an adiabatic invariant of the harmonic motion [11]. Modeling the mean thermal energy via the equipartition theorem ($E \propto k_B T$), this invariance implies that along each independent degree of freedom

$$\frac{T}{\Omega} = \text{const.} \quad (1.45)$$

Because Ω_z and Ω_{rad} scale at different rates with w_0 , an initially isotropic thermal distribution evolves into an anisotropic one: adiabatic compression increases the transverse temperature relative to the axial temperature.

Lamb–Dicke parameter. The axial behavior of the potential also affects the applicability of advanced laser-cooling mechanisms. The ground-state spatial width of the atomic wavepacket along the z -axis is

$$x_0 = \sqrt{\frac{\hbar}{2m\Omega_z}}, \quad (1.46)$$

and the parameter describing the coupling of this motional state to a resonant cooling field of wavenumber $k_c = 2\pi/\lambda_c$ is the Lamb–Dicke parameter

$$\eta = k_c x_0 = k_c \sqrt{\frac{\hbar}{2m\Omega_z}}. \quad (1.47)$$

The Lamb–Dicke regime provides the basis for the EIT-cooling treatment developed in Section 1.4.

1.3.5 Dynamics in the Accelerated Potential

Transporting a trapped atom between two spatial positions requires a profile of continuous acceleration followed by symmetric deceleration. This is achieved by applying a linear temporal ramp to the beat frequency $\Delta\nu(t)$.

Transforming the Hamiltonian into the non-inertial frame of the accelerating lattice, an atom subject to an acceleration a experiences a fictitious force $-ma$. The addition of this linear term

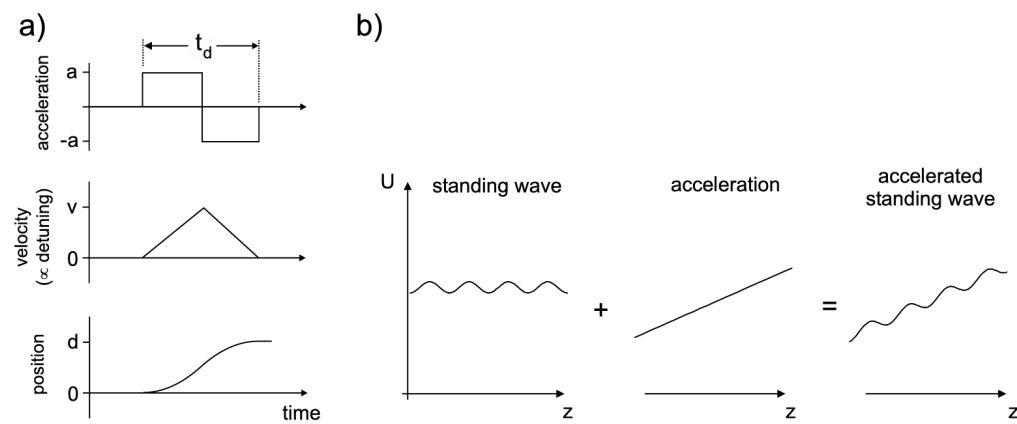


Figure 1.11: *In the frame co-moving with the accelerated lattice, the periodic potential is superimposed with a linear gradient, resulting in a tilted washboard landscape [7].*

along the optical axis modifies the effective potential:

$$U_{\text{eff}}(z') = U_0 \cos^2(kz') + maz', \quad (1.48)$$

where z' is the coordinate in the co-moving frame and $U_0 < 0$ denotes a red-detuned trap. The linear term breaks the symmetry of the periodic profile, lowering the potential barrier in the direction of the fictitious force. Stationary minima of U_{eff} exist provided the equation $dU_{\text{eff}}/dz' = 0$ admits real solutions corresponding to local minima. Differentiating yields

$$\frac{dU_{\text{eff}}(z')}{dz'} = -kU_0 \sin(2kz') + ma = 0 \implies ma = kU_0 \sin(2kz'). \quad (1.49)$$

Since $|\sin(2kz')| \leq 1$, real solutions require $|ma| \leq |kU_0|$. As $|a|$ approaches this limit, the local minimum and the adjacent maximum merge into a single inflection point, causing the trapping barrier to vanish completely and the atom to escape. The threshold acceleration for a particle with zero kinetic energy^[CC 48] is therefore:

$$a_0 = \frac{k|U_0|}{m}. \quad (1.50)$$

This theoretical bound assumes a particle at absolute zero temperature. For a thermal cloud, the effective potential barrier $\Delta U = U_{\text{max}} - U_{\text{min}}$ decreases with acceleration, causing atoms with non-zero kinetic energy to escape at values significantly below a_0 . Furthermore, the local trap frequency approaches zero ($\Omega \rightarrow 0$) as $a \rightarrow a_0$. These factors impose stringent constraints on the acceleration profiles in optical conveyor belt operations to minimize thermal loss and maintain the adiabatic confinement of the atomic wavepacket.

[CC 48] CC nota: Giusto, ma e' un doppio best case e conviene dirlo. Primo: nel potenziale inclinato si usa U_0 nudo, senza involucro gaussiano e senza fattore radiale, quindi a_0 vale sull'asse e al fuoco; fuori asse la buca e' meno profonda e l'atomo sfugge prima. Secondo: a temperatura finita gli atomi superano la barriera ridotta prima che si annulli. E' il numero che limita davvero il tempo di trasporto.

1.4 Electromagnetically Induced Transparency Cooling

1.4.1 Introduction to EIT Cooling

The preparation of trapped atoms in their motional ground state is a fundamental prerequisite for high-fidelity quantum information processing and the realization of strongly coupled atom-photon systems. Resolved-sideband cooling is effective for this task, but it imposes the restriction of the strong-confinement condition: the natural linewidth of the atomic transition γ must be much smaller than the harmonic trap frequency^[CC 49] ν ($\gamma \ll \nu$) [12]. This requirement is difficult to fulfill in shallow or low-frequency traps, where the sidebands are not spectrally resolved. Electromagnetically Induced Transparency (EIT) cooling overcomes this limitation by exploiting quantum interference in a multi-level atomic structure [12, 13]. It achieves ground-state cooling without requiring strong confinement; the relevance of this feature becomes clear when the cooling stage is integrated into a sequence that involves transport and tight spatial confinement.

In the experimental protocol considered in this work, atoms are first cooled in a magneto-optical trap, transferred to an optical dipole trap, and then transported into the hollow core of a photonic crystal fiber by means of an optical conveyor belt. The transport itself is a source of heating, the transverse compression required to match the fiber mode^[CC 50] increases the trap frequencies and raises the transverse temperature. By the time the atoms reach the fiber core, their temperature is significantly higher, and re-cooling is required before any precision experiment can be performed. In this section, all frequencies and detunings are expressed as angular frequencies in units of rad/s, and the corresponding linear frequencies in Hz are obtained by dividing by 2π .

1.4.2 The Three-Level Λ System and Coherent Population Trapping

The theoretical framework of EIT cooling is based on a three-level atomic system in a Λ configuration (Fig. 1.12). This consists of two stable or metastable ground states, $|g_1\rangle$ and $|g_2\rangle$, both optically coupled to a common, short-lived excited state $|e\rangle$ with spontaneous decay rate γ [12, 13].

The transition $|g_1\rangle \leftrightarrow |e\rangle$ is driven by a weak probe laser with Rabi frequency Ω_p , satisfying $\Omega_p \ll \Omega_c$, while the transition $|g_2\rangle \leftrightarrow |e\rangle$ is driven by a strong coupling laser with Rabi frequency

[CC 49] CC nota: Attenzione al riuso dei simboli fra sezioni: qui ν e' la frequenza di trappola, ma nella sezione sul conveyor belt ν e' la frequenza ottica dei fasci e $\Delta\nu$ il battimento, tre cose diverse con lo stesso simbolo nello stesso capitolo. Stessa cosa per la larghezza naturale, qui γ e nella sezione sulla trappola di dipolo Γ . Userei ν_{trap} qui e un solo simbolo per la larghezza in tutto il capitolo.

[CC 50] CC nota: Virgola che unisce due proposizioni indipendenti (comma splice). Meglio i due punti: "The transport itself is a source of heating; the transverse compression required to match the fiber mode increases the trap frequencies and raises the transverse temperature."

Ω_c . Denoting the bare transition frequencies by $\omega_{eg_j} = (E_e - E_{g_j})/\hbar$, the single-photon detunings are defined as

$$\Delta_p = \omega_p - \omega_{eg_1}, \quad \Delta_c = \omega_c - \omega_{eg_2}, \quad (1.51)$$

and the two-photon detuning is $\delta_{2\text{ph}} = \Delta_p - \Delta_c$. After applying the rotating wave approximation, the laboratory-frame Hamiltonian is

$$H_{\text{lab}} = \sum_{j=1,2} E_{g_j} |g_j\rangle\langle g_j| + E_e |e\rangle\langle e| + \frac{\hbar}{2} \left(\Omega_p e^{-i\omega_p t} |e\rangle\langle g_1| + \Omega_c e^{-i\omega_c t} |e\rangle\langle g_2| + \text{h.c.} \right). \quad (1.52)$$

The explicit transformation to the rotating frame is performed with

$$U(t) = |g_1\rangle\langle g_1| + e^{-i(\omega_p - \omega_c)t} |g_2\rangle\langle g_2| + e^{-i\omega_p t} |e\rangle\langle e|, \quad (1.53)$$

while $|g_1\rangle$ is left unchanged. With the convention $|\psi_{\text{rot}}\rangle = U^\dagger(t)|\psi_{\text{lab}}\rangle$, the transformed Hamiltonian is

$$H_{\text{rot}} = U^\dagger H_{\text{lab}} U - i\hbar U^\dagger \dot{U}. \quad (1.54)$$

Subtracting the irrelevant constant energy^[CC 51] $E_e - \hbar\omega_p$ from all three levels gives

$$H_{\text{rot}} = -\hbar\Delta_p |e\rangle\langle e| + \frac{\hbar}{2} (\Omega_p |e\rangle\langle g_1| + \Omega_c |e\rangle\langle g_2| + \text{h.c.}). \quad (1.55)$$

For the derivation of the dark state and the dressed-state cooling condition, exact two-photon resonance is assumed and both lasers therefore have the same single-photon detuning, $\Delta_p = \Delta_c \equiv \Delta$. Under this assumption, Eq. (1.55) is written as $H_{\text{rot}} = H_0 + V_0$, with [13]

$$H_0 = -\hbar\Delta |e\rangle\langle e| \quad (1.56)$$

$$V_0 = \frac{\hbar}{2} (\Omega_p |e\rangle\langle g_1| + \Omega_c |e\rangle\langle g_2| + \text{h.c.}) \quad (1.57)$$

The incoherent spontaneous emission from the excited state is described by the Liouvillian operator $\mathcal{K}$ [13]:

$$\mathcal{K}\rho = -\frac{\gamma}{2} (|e\rangle\langle e|\rho + \rho|e\rangle\langle e|) + \sum_{j=1,2} \gamma_j |g_j\rangle\langle e|\rho|e\rangle\langle g_j| \quad (1.58)$$

where γ_1 and γ_2 are the partial decay rates into $|g_1\rangle$ and $|g_2\rangle$, with $\gamma_1 + \gamma_2 = \gamma$ [13]. Physically, $\mathcal{K}$ encodes the fact that population in $|e\rangle$ decays at total rate γ , redistributed between $|g_1\rangle$ and $|g_2\rangle$ according to the branching ratios γ_1/γ and γ_2/γ .

The essential physical mechanism underlying EIT is the emergence of a dark state: a coherent superposition of the two ground states that is decoupled from the excited state by destructive quantum interference between the two optical excitation pathways. At two-photon resonance,

[CC 51] CC errore: Due problemi. (1) La costante non torna: sottraendo $E_e - \hbar\omega_p$ da tutti e tre i livelli, $|e\rangle$ finisce a zero, non a $-\hbar\Delta_p$ come nell'equazione successiva. L'operazione vera e' porre l'origine su $|g_1\rangle$, cioe' sottrarre E_{g_1} . (2) Piu' sostanziale: nel frame rotante $|g_2\rangle$ acquista il termine $-\hbar\delta_{2\text{ph}}|g_2\rangle\langle g_2|$, che nell'espressione manca. Si annulla solo a risonanza a due fotoni, assunta solo nella frase SUCCESSIVA, mentre l'equazione e' presentata come generale; e il termine serve, perche' piu' avanti si scansiona proprio $\delta_{2\text{ph}} \neq 0$.

this dark state takes the form [13]:

$$|\Psi_D\rangle = \frac{1}{\Omega} (\Omega_c |g_1\rangle - \Omega_p |g_2\rangle) \quad (1.59)$$

where $\Omega = \sqrt{\Omega_p^2 + \Omega_c^2}$ is the total effective Rabi frequency [13]. An atom optically pumped into $|\Psi_D\rangle$ ceases to absorb light, a phenomenon known as Coherent Population Trapping (CPT) [14].

The decoupling of $|\Psi_D\rangle$ from $|e\rangle$ is verified by direct evaluation of the coupling matrix element $\langle e|V_0|\Psi_D\rangle$. Using Eq. (1.57) and the coefficients of $|\Psi_D\rangle$ in Eq. (1.59), only the $\Omega_p|e\rangle\langle g_1|$ and $\Omega_c|e\rangle\langle g_2|$ terms of V_0 contribute, giving

$$\langle e|V_0|\Psi_D\rangle = \frac{\hbar}{2\Omega} (\Omega_p\Omega_c - \Omega_c\Omega_p) = 0. \quad (1.60)$$

The excitation amplitude contributed by the $|g_1\rangle \rightarrow |e\rangle$ pathway, proportional to Ω_p times the Ω_c/Ω weight of $|g_1\rangle$ in $|\Psi_D\rangle$, is cancelled by the amplitude contributed by the $|g_2\rangle \rightarrow |e\rangle$ pathway, proportional to Ω_c times the $-\Omega_p/\Omega$ weight of $|g_2\rangle$.

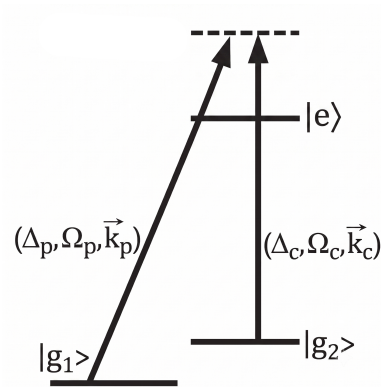


Figure 1.12: *The three-level Λ system used for EIT cooling, consisting of two ground states ($|g_1\rangle$, $|g_2\rangle$) coupled to a common excited state ($|e\rangle$) by a probe and a coupling laser.*

1.4.3 Dressed States and the Fano Absorption Spectrum

The cooling mechanism is analyzed in the dressed-state picture [13]. When the coupling laser interacts with the atom, the unperturbed atomic states are replaced by hybridized energy levels, the eigenstates of the coupled atom–laser Hamiltonian.

In the driven Λ system, the dark state $|\Psi_D\rangle$ is an eigenstate of the full internal Hamiltonian $H_0 + V_0$. The three-level system thus reduces to an effective two-level system spanned by $|e\rangle$ and the orthogonal bright ground state

$$|\psi_C\rangle = \frac{1}{\Omega} (\Omega_p |g_1\rangle + \Omega_c |g_2\rangle). \quad (1.61)$$

The state $|\psi_C\rangle$ is termed *bright* because, unlike $|\Psi_D\rangle$, it couples to $|e\rangle$ via V_0 . Restricting $H_0 + V_0$ to this two-dimensional subspace yields the effective interaction matrix^[CC 52]

$$H_{\text{2-level}} = \hbar \begin{pmatrix} 0 & \Omega/2 \\ \Omega/2 & -\Delta \end{pmatrix} \quad \text{in the basis } \{|e\rangle, |\psi_C\rangle\}. \quad (1.62)$$

[CC 52] CC errore: La diagonale e' scambiata rispetto alla base dichiarata. Con $H_0 = -\hbar\Delta|e\rangle\langle e|$ si ha $\langle e|H_0|e\rangle = -\hbar\Delta$ e $\langle\psi_C|H_0|\psi_C\rangle = 0$, quindi nella base $\{|e\rangle, |\psi_C\rangle\}$ la diagonale e' $(-\Delta, 0)$, non $(0, -\Delta)$. Gli autovalori non cambiano (per questo le energie vestite restano giuste), ma cambia l'ETICHETTA degli autovettori, e l'errore si propaga in altri tre punti. Con la diagonale corretta $\tan\theta = (\Delta + \sqrt{\Delta^2 + \Omega^2})/\Omega$, grande per $\Delta \gg \Omega$: quindi $|\psi_+\rangle$ e' ground-like, non excited-like.

Diagonalizing Eq. (1.62) gives the dressed energies

$$E_{\pm} = -\frac{\hbar\Delta}{2} \pm \frac{\hbar}{2}\sqrt{\Delta^2 + \Omega^2}, \quad (1.63)$$

with the corresponding orthogonal eigenvectors

$$|\psi_+\rangle = \cos\theta|e\rangle + \sin\theta|\psi_C\rangle, \quad |\psi_-\rangle = \sin\theta|e\rangle - \cos\theta|\psi_C\rangle, \quad (1.64)$$

where the mixing angle θ satisfies $\tan\theta = (\sqrt{\Delta^2 + \Omega^2} - \Delta)/\Omega$ [13].

The preceding dressed-state construction refers to exact two-photon resonance, $\Delta_p = \Delta_c = \Delta$. To calculate or measure the absorption profile, instead, the coupling-laser frequency is held fixed, so that $\Delta_c \equiv \Delta$ remains constant, while the probe frequency is scanned. Therefore

$$\Delta_p = \Delta + \delta_{2\text{ph}}, \quad \Delta_c = \Delta, \quad (1.65)$$

where $\delta_{2\text{ph}}$ is the scan variable and $\delta_{2\text{ph}} = 0$ recovers the Hamiltonian used above. Thus, the dressed resonances are set primarily by the fixed coupling field, whereas the probe absorption is evaluated as a function of $\delta_{2\text{ph}}$.

The dressed-state structure is probed via a pump–probe scheme: the coupling laser dresses the atomic states, while the weak cooling laser probes the resulting spectrum. In EIT cooling, the coupling laser operates far from single-photon resonance, $|\Delta| \gg \Omega$. In this limit the mixing angle θ is small, and the dressed states separate into a predominantly excited-like state and a predominantly ground-like state. Since spontaneous emission occurs from the $|e\rangle$ component, the linewidth of each branch is determined by its excited-state admixture. The state $|\psi_+\rangle$ is excited-state-like and retains approximately the bare atomic linewidth^[CC 53] ($\gamma_+ \approx \gamma$). The state $|\psi_-\rangle$ is ground-state-like, with a suppressed linewidth $\gamma_- \approx \gamma\Omega^2/(4\Delta^2) \ll \gamma$.

As $\delta_{2\text{ph}}$ is varied by scanning the probe laser while keeping $\Delta_c = \Delta$ fixed, the excitation amplitudes to the broad background ($|\psi_+\rangle$) and to the narrow resonance ($|\psi_-\rangle$) interfere. This interference generates an asymmetric Fano-like absorption profile. For a blue-detuned coupling laser ($\Delta > 0$), the spectrum exhibits three features: a zero-absorption point at $\delta_{2\text{ph}} = 0$, corresponding to the two-photon resonance and the dark state $|\Psi_D\rangle$; a broad absorption resonance centered near the bare probe transition, and a narrow absorption resonance.

The coupling laser induces an AC Stark shift δ that displaces the narrow resonance from the dark-state zero. The exact expression is

$$\delta = \frac{\sqrt{\Delta^2 + \Omega_c^2} - |\Delta|}{2}, \quad (1.66)$$

which in the limit $\Delta \gg \Omega_c$ reduces to $\delta \approx \Omega_c^2/(4\Delta)$. The experimental control of this AC Stark

[CC 53] CC errore: Etichette $\pm$ invertite, conseguenza della diagonale scambiata. Il controllo decisivo e' interno alla tesi stessa: $E_+ = \hbar(-\Delta + \sqrt{\Delta^2 + \Omega^2})/2$ e' ESATTAMENTE lo shift AC Stark δ scritto poche righe sotto, e lo shift AC Stark e' per definizione quello dello stato ground-like stretto. Verificato numericamente con $\Delta = 10$, $\Omega = 1$: lo stato a E_+ ha $|\langle e|\psi\rangle|^2 = 0.0025$, quello a E_- ha 0.998, e $\Omega^2/4\Delta^2 = 0.0025$ coincide col primo. Quindi $|\psi_+\rangle$ e' stretto e ground-like, $|\psi_-\rangle$ largo ed excited-like: nel testo e' scritto al contrario, e va corretta anche la didascalia della figura dello spettro.

shift is the foundation^[CC 54] of the EIT cooling protocol.

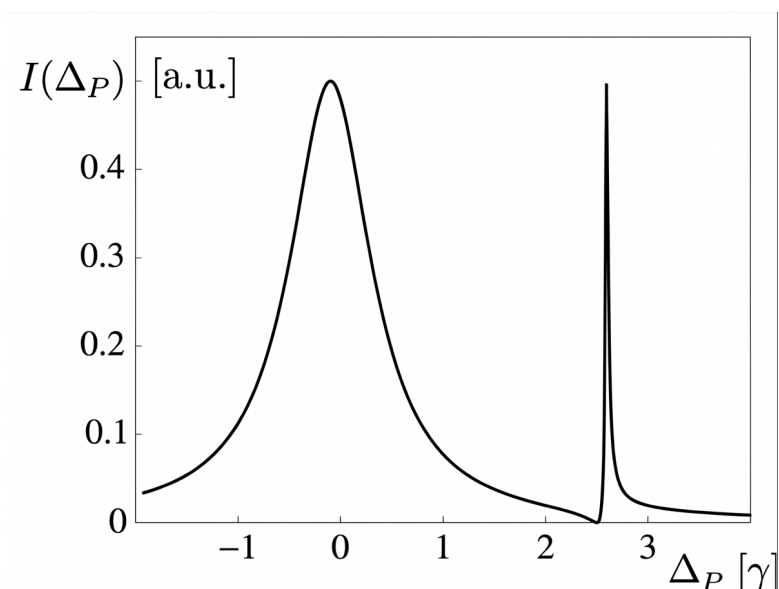


Figure 1.13: *Absorption spectrum of the weak probe laser as a function of the two-photon detuning $\delta_{2\text{ph}} = \Delta_p - \Delta_c$, obtained by scanning Δ_p while keeping the coupling detuning $\Delta_c = \Delta$ fixed. The spectrum exhibits the characteristic asymmetric Fano lineshape of EIT: a zero-absorption point at $\delta_{2\text{ph}} = 0$, a broad resonance of width $\gamma_+ \approx \gamma$ associated with $|\psi_+\rangle$, and a narrow, AC-Stark-shifted resonance of width $\gamma_- \ll \gamma$ associated with $|\psi_-\rangle$. Credits: [12]*

1.4.4 Coupling to the Motional Degrees of Freedom

For an atom confined in a harmonic trapping potential of frequency ν , the external center-of-mass motion is quantized into vibrational Fock states $|n\rangle$, with mechanical Hamiltonian $H_{\text{mec}} = \hbar\nu(a^\dagger a + 1/2)$. EIT cooling maps the engineered asymmetric Fano spectrum onto these motional sidebands [12].

The dynamics are evaluated in the Lamb–Dicke regime, where the spatial extent of the atomic wavepacket is much smaller than the optical wavelength (characterized by $\eta \ll 1$, see 1.47). In this two-photon process, the relevant Lamb-Dicke parameter is defined by the effective wavevector^[CC 55] $\Delta\vec{k} = \vec{k}_p - \vec{k}_c$, such that $\eta = |\Delta\vec{k}|x_0$. A crucial geometrical requirement for EIT cooling is therefore $\Delta\vec{k} \neq 0$: if the lasers are copropagating, there is no net momentum transfer on the atom. For this reason, the beams must be aligned at an angle to guarantee a non-zero projection of $\Delta\vec{k}$ along the cooling axis. In this limit, the ideal cooling conditions are achieved by tuning the AC Stark shift to match the trap frequency [12]:

$$\delta \simeq \nu. \quad (1.67)$$

[CC 54] CC riferimenti: La figura con lo spettro di assorbimento qui sotto non viene mai richiamata nel testo (verificato su tutta la tesi: zero occorrenze della sua \ref). E' un peccato proprio qui, perche' mostra in un colpo le tre feature appena elencate e ha gia' una didascalia scritta bene.

[CC 55] CC nota: Questa definizione e' quella giusta per il processo a due fotoni, ma non coincide con quella data nella sezione sul conveyor belt, dove $\eta = k_c x_0$ col solo vettore d'onda del fascio di raffreddamento; e il rimando poco sopra manda a quell'equazione come se fosse la stessa cosa. Mettere un rimando in avanti la', oppure definirei η una volta sola qui.

Substituting the approximate expression $\delta \approx \Omega_c^2/(4\Delta)$ yields $\Omega_c^2 \approx 4\Delta\nu$. The exact condition, obtained from Eq. (1.66) without approximation, is

$$\Omega_c^2 = 4\nu(\nu + \Delta), \quad (1.68)$$

which reduces to the approximate form in the limit $\nu \ll \Delta$ typical of EIT cooling. Satisfying this resonance condition produces two simultaneous effects (also shown in Fig. 1.14):

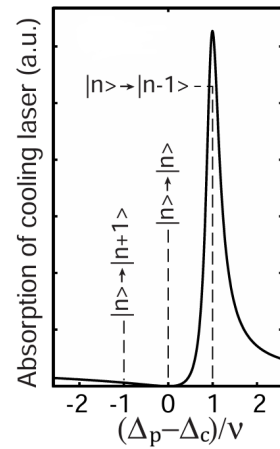


Figure 1.14: *Absorption of the cooling laser as a function of the two-photon detuning, in units of the trap frequency ν . The Fano peak, engineered to sit at +1, drives the red-sideband transition $|n\rangle \rightarrow |n-1\rangle$ responsible for cooling, while the carrier $(|n\rangle \rightarrow |n\rangle)$ and blue-sideband $(|n\rangle \rightarrow |n+1\rangle)$ transitions, marked at 0 and -1, experience comparatively little absorption. Credits: [12]*

- **Suppression of heating (carrier cancellation).** The zero of the Fano profile is aligned with the carrier transition $(|g_1, n\rangle \rightarrow |e, n\rangle)$ [12]. An atom in the dark state therefore cannot scatter photons unless it changes its motional state. This suppresses the dominant source of heating that affects standard cooling schemes.

- **Enhancement of cooling (red-sideband excitation).** The narrow dressed-state resonance $|\psi_-\rangle$ is shifted onto the red-sideband transition^[CC 56] $(|g_1, n\rangle \rightarrow |e, n-1\rangle)$ [12], enhancing the absorption cross-section for the removal of a vibrational quantum. Conversely, the blue sideband $(|g_1, n\rangle \rightarrow |e, n+1\rangle)$, which would add a phonon, falls in a spectral region of minimal excitation probability.

After resonant excitation on the red sideband, $|g_1, n\rangle \rightarrow |e, n-1\rangle$, the atom decays at rate γ . For a net phonon to be removed, the decay must predominantly return the atom to $|g_i, n-1\rangle$; that is, it must occur on the carrier transition of the excited manifold, $|e, n-1\rangle \rightarrow |g_i, n-1\rangle$, leaving the vibrational quantum number unchanged, rather than to $|g_i, n\rangle$, which would restore the phonon just removed. This is guaranteed in the Lamb-Dicke regime: the recoil imparted by the spontaneously emitted photon changes n by an amount controlled by η , so that sideband emission ($\Delta n = \pm 1$) is suppressed relative to carrier emission ($\Delta n = 0$) by a factor of order η^2 . The cooling cycle thus closes: absorption removes one phonon on the red sideband, the subsequent decay leaves the vibrational state untouched, and the net effect of many such cycles is the removal of motional quanta. The full scheme of EIT cooling, combining the level structure with the corresponding absorption spectrum and the subsequent decay dynamics, is shown in Fig. 1.15.

[CC 56] **CC errore:** Terzo punto in cui si propaga lo scambio: la risonanza stretta spostata dall'AC Stark shift e' $|\psi_+\rangle$, non $|\psi_-\rangle$. Il resto della frase e' corretto.

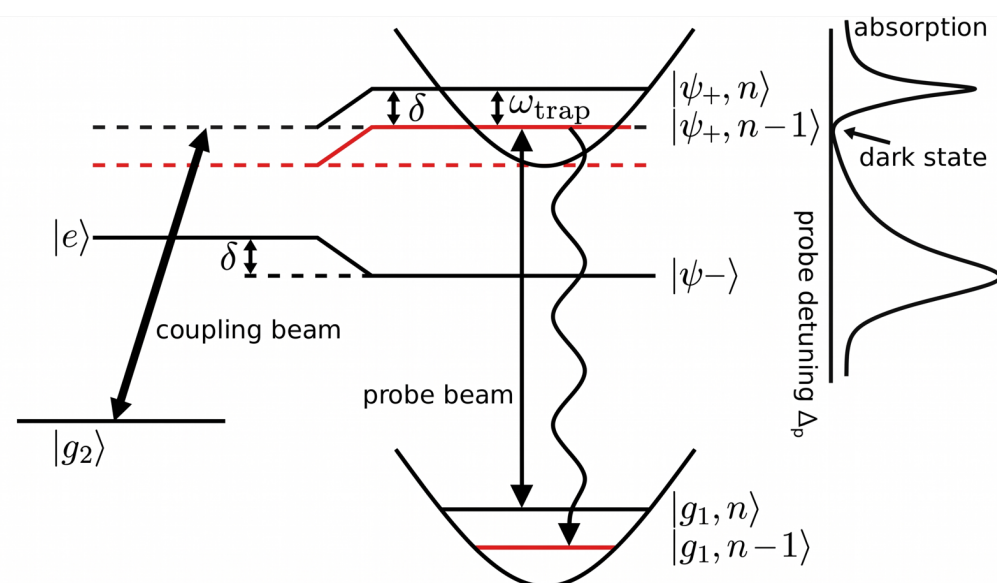


Figure 1.15: *Full picture of the EIT cooling scheme, combining the level structure with the corresponding absorption spectrum. Adapted from [15]*

1.4.5 Cooling Dynamics and the Theoretical Limit

Provided that the cooling laser is weak ($\Omega_p \ll \Omega_c$) and the narrow resonance is not saturated, the motional dynamics can be described by coarse-graining the evolution over the internal-state relaxation time. The populations $P(n)$ of the vibrational states evolve according to a classical rate equation [12, 13]:

$$\frac{d}{dt}P(n) = \eta^2 [A_- ((n+1)P(n+1) - nP(n)) + A_+ (nP(n-1) - (n+1)P(n))] \quad (1.69)$$

where A_- and A_+ are the effective excitation rates of the red and blue sidebands, respectively. Incorporating the full quantum interference around the dark resonance, these rates take the explicit form

$$A_{\pm} = \frac{1}{4} \left(\frac{\Omega_p \Omega_c}{\Omega} \right)^2 \frac{\gamma \nu^2}{[\Omega_c^2/4 - \nu(\nu \mp \Delta)]^2 + \gamma^2 \nu^2/4}. \quad (1.70)$$

The evolution of the mean phonon number $\langle n \rangle = \sum_n n P(n)$ follows [12, 13]:

$$\frac{d\langle n \rangle}{dt} = -\eta^2 (A_- - A_+) \langle n \rangle + \eta^2 A_+ = -W \langle n \rangle + \eta^2 A_+, \quad (1.71)$$

where $W = \eta^2 (A_- - A_+)$ is the net cooling rate. Under the optimal condition $\delta \simeq \nu$, the maximum cooling rate scales as

$$W_{\max} \sim \eta^2 \frac{\Omega_p^2 \Omega_c^2}{\Omega^2 \gamma}, \quad (1.72)$$

which confirms that fast cooling is achieved for large Rabi frequencies [13].

The steady-state mean vibrational quantum number $\langle n_S \rangle$ is given by the ratio of the heating rate to the net cooling rate:

$$\langle n_S \rangle = \frac{A_+}{A_- - A_+} = \frac{\gamma^2 \nu^2 + 4[\Omega_c^2/4 - \nu(\nu + \Delta)]^2}{4\Delta\nu|\Omega_c^2 - 4\nu^2|}. \quad (1.73)$$

The absolute minimum is achieved when the AC Stark shift matches the trap frequency, i.e. when Eq. (1.68) is satisfied, yielding the fundamental theoretical cooling limit [12, 13]:

$$\langle n_S \rangle_{\min} = \left(\frac{\gamma}{4\Delta} \right)^2. \quad (1.74)$$

By choosing a sufficiently large coupling-laser detuning $\Delta \gg \gamma$, $\langle n_S \rangle$ can in principle be made arbitrarily small. However maintaining the resonance condition $\delta \simeq \nu$ at larger Δ requires $\Omega_c^2 \propto \Delta\nu$ to grow accordingly, so faster cooling and lower final occupations demand correspondingly higher coupling-laser intensities.

Bibliography

- [1] Matej Komanec *et al.* “Hollow-Core Optical Fibers”. In: *Radioengineering* 29 (2020), pp. 417–430. DOI: 10.13164/re.2020.0417.
- [2] M. J. F. Digonnet *et al.* “Understanding air-core photonic-bandgap fibers: analogy to conventional fibers”. In: *Journal of Lightwave Technology* 23.12 (2005), pp. 4169–4177. DOI: 10.1109/JLT.2005.859406.
- [3] B. Debord *et al.* “Hollow-Core Fiber Technology: The Rising of “Gas Photonics””. In: *Fibers* 7.2 (2019), p. 16. DOI: 10.3390/fib7020016.
- [4] R. F. Cregan *et al.* “Single-Mode Photonic Band Gap Guidance of Light in Air”. In: *Science* 285.5433 (1999), pp. 1537–1539. DOI: 10.1126/science.285.5433.1537.
- [5] J. von Neumann and E. Wigner. “Über merkwürdige diskrete Eigenwerte”. In: *Physikalische Zeitschrift* 30 (1929), pp. 465–467.
- [6] E. L. Raab *et al.* “Trapping of Neutral Sodium Atoms with Radiation Pressure”. In: *Physical Review Letters* 59.23 (1987), pp. 2631–2634. DOI: 10.1103/PhysRevLett.59.2631.
- [7] Stefan Kuhr. “A Controlled Quantum System of Individual Neutral Atoms”. PhD thesis. Bonn, Germany: Rheinische Friedrich-Wilhelms-Universität Bonn, 2003.
- [8] Harold J. Metcalf and Peter van der Straten. *Laser Cooling and Trapping*. Springer New York, 1999. DOI: 10.1007/978-1-4612-1470-0.
- [9] J. Dalibard and C. Cohen-Tannoudji. “Laser cooling below the Doppler limit by polarization gradients: simple theoretical models”. In: *Journal of the Optical Society of America B* 6.11 (1989), pp. 2023–2045. DOI: 10.1364/JOSAB.6.002023.
- [10] Rudolf Grimm, Matthias Weidemüller, and Yurii B. Ovchinnikov. “Optical Dipole Traps for Neutral Atoms”. In: *Advances in Atomic, Molecular, and Optical Physics* 42 (2000), pp. 95–170. DOI: 10.1016/S1049-250X(08)60186-X.
- [11] L. D. Landau and E. M. Lifshitz. *Mechanics*. 3rd. Vol. 1. Course of Theoretical Physics. Section 50: Adiabatic invariants. Butterworth-Heinemann, 1976. ISBN: 978-0750628969.

-
- [12] Giovanna Morigi, Jürgen Eschner, and Christoph H. Keitel. “Ground State Laser Cooling Using Electromagnetically Induced Transparency”. In: *Physical Review Letters* 85.21 (2000), pp. 4458–4461. DOI: 10.1103/PhysRevLett.85.4458.
 - [13] G. Morigi. “Cooling atomic motion with quantum interference”. In: *Physical Review A* 67 (2003), p. 033402. DOI: 10.1103/PhysRevA.67.033402.
 - [14] Brahim Lounis and Claude Cohen-Tannoudji. “Coherent population trapping and Fano profiles”. In: *Journal de Physique II* 2 (1992), pp. 579–592. DOI: 10.1051/jp2:1992153.
 - [15] Chang Hoong Chow *et al.* “Fano resonance in excitation spectroscopy and cooling of an optically trapped single atom”. In: *Phys. Rev. Res.* 6 (2024), p. 023154. DOI: 10.1103/PhysRevResearch.6.023154.