


BAFANG
电机特性曲线图

生产厂家:BAFANG

型号:RM G060.1000 6T 90A 48V 日期:2024年 03月 05日

编号:12403050001

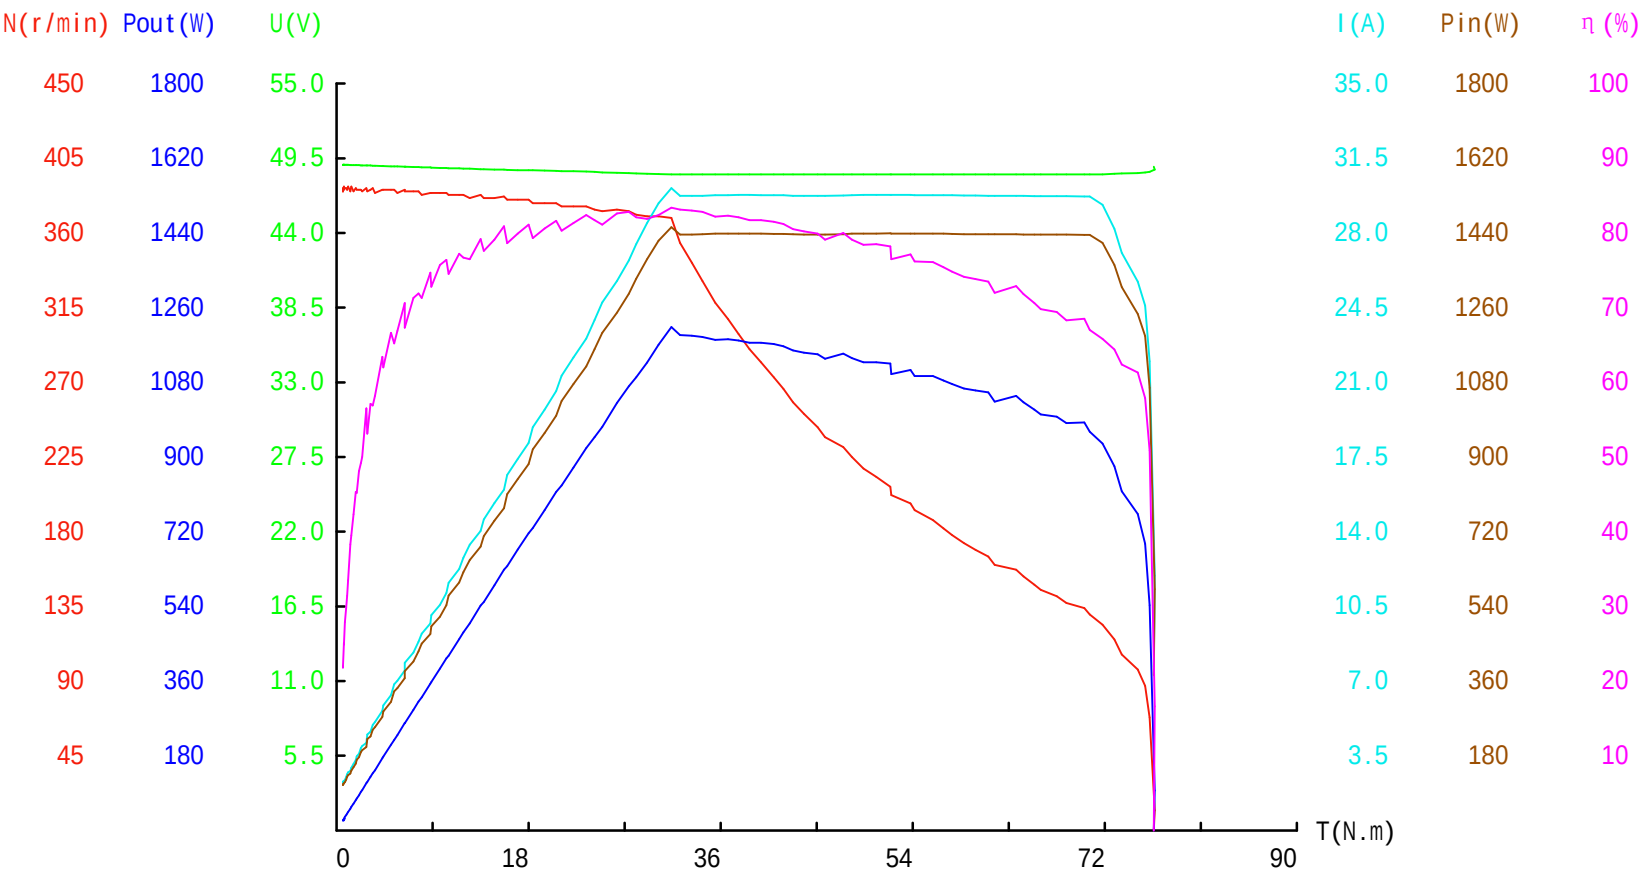

电压: 49.02 (V)

起始点: [0.6(N.m)]
转速: 385 (r/min)
电流: 2.24 (A)

最大效率点: [83.4%]
转矩: 31.4 (N.m)
转速: 369 (r/min)
电流: 30.10 (A)
输出功率: 1213.38 (W)

最大转矩点: [76.7(N.m)]
转速: 12 (r/min)
电流: 11.94 (A)
输出功率: 96.39 (W)

最大输出功率点: [1213.38(W)]
转矩: 31.4 (N.m)
转速: 369 (r/min)
电流: 30.10 (A)

操作者:

BAFANG
电机试验记录表

生产厂家:BAFANG

型号:RM G060.1000 6T 90A 48V

编号:12403050001

日期:2024年3月5日 操作者:

说明	转矩(N.m)	转速(r/min)	输出功率(W)	电压(V)	电流(A)	输入功率(W)	效率(%)
转矩Max	76.7	12	96.39	48.67	11.94	581.12	16.6
转速Max	0.7	388	28.44	49.02	2.31	113.24	25.1
输出功率Max	31.4	369	1213.38	48.31	30.10	1454.13	83.4
电压Max	0.6	385	24.19	49.02	2.24	109.80	22.0
电流Max	31.4	369	1213.38	48.31	30.10	1454.13	83.4
输入功率Max	31.4	369	1213.38	48.31	30.10	1454.13	83.4
效率Max	31.4	369	1213.38	48.31	30.10	1454.13	83.4
1	0.6	385	24.19	49.02	2.24	109.80	22.0
2	0.6	387	24.32	49.02	2.28	111.77	21.8
3	0.6	386	24.25	49.02	2.25	110.30	22.0
4	0.7	388	28.44	49.02	2.31	113.24	25.1
5	0.7	386	28.30	49.02	2.32	113.73	24.9
6	0.8	387	32.42	49.02	2.37	116.18	27.9
7	0.9	387	36.48	49.01	2.50	122.53	29.8
8	1.0	386	40.42	49.01	2.63	128.90	31.4
9	1.1	388	44.70	49.01	2.72	133.31	33.5
10	1.3	385	52.41	49.00	2.79	136.71	38.3
11	1.4	388	56.89	49.00	2.94	144.06	39.5
12	1.6	385	64.51	49.00	3.11	152.39	42.3
13	1.8	387	72.95	48.99	3.29	161.18	45.3
14	1.9	386	76.80	48.99	3.47	170.00	45.2
15	2.1	386	84.89	48.99	3.60	176.36	48.1
16	2.3	386	92.97	48.98	3.86	189.06	49.2
17	2.4	385	96.76	48.98	3.95	193.47	50.0
18	2.8	387	113.48	48.97	4.10	200.78	56.5
19	2.9	385	116.92	48.97	4.50	220.37	53.1
20	3.2	386	129.35	48.96	4.63	226.68	57.1
21	3.4	387	137.79	48.95	4.95	242.30	56.9
22	3.6	384	144.77	48.95	5.08	248.67	58.2
23	4.3	386	173.82	48.93	5.60	274.01	63.4
24	4.4	386	177.86	48.93	5.86	286.73	62.0
25	5.1	386	206.16	48.91	6.33	309.60	66.6
26	5.4	386	218.28	48.90	6.85	334.97	65.2
27	5.7	384	229.22	48.89	7.01	342.72	66.9
28	6.4	386	258.71	48.88	7.50	366.60	70.6
29	6.4	385	258.04	48.87	7.85	383.63	67.3
30	7.2	385	290.29	48.86	8.33	407.00	71.3
31	7.7	385	310.45	48.84	8.84	431.75	71.9
32	8.0	383	320.87	48.83	9.22	450.21	71.3
33	8.8	384	353.88	48.82	9.70	473.55	74.7
34	8.9	384	357.90	48.80	10.08	491.90	72.8
35	9.7	384	390.07	48.79	10.56	515.22	75.7
36	10.3	384	414.20	48.78	11.12	542.43	76.4
37	10.5	383	421.14	48.76	11.60	565.62	74.5
38	11.5	383	461.25	48.75	12.25	597.19	77.2
39	11.9	383	477.30	48.73	12.77	622.28	76.7
40	12.5	381	498.74	48.72	13.38	651.87	76.5
41	13.5	383	541.47	48.69	14.04	683.61	79.2
42	13.8	381	550.61	48.68	14.57	709.27	77.6

型号: RM G060.1000 6T 90A 48V 编号: 12403050001 日期: 2024年3月5日

说明	扭矩(N.m)	转速(r/min)	输出功率(W)	电压(V)	电流(A)	输入功率(W)	效率(%)
43	14.8	381	590.51	48.67	15.33	746.11	79.1
44	15.7	382	628.07	48.66	15.96	776.61	80.9
45	16.0	380	636.72	48.65	16.66	810.51	78.6
46	17.0	380	676.51	48.63	17.41	846.65	79.9
47	18.0	380	716.31	48.62	18.16	882.94	81.1
48	18.4	378	728.37	48.61	18.90	918.73	79.3
49	19.5	378	771.91	48.59	19.71	957.71	80.6
50	20.6	378	815.46	48.57	20.58	999.57	81.6
51	21.1	376	830.83	48.56	21.31	1034.81	80.3
52	22.2	376	874.14	48.54	22.16	1075.65	81.3
53	23.4	376	921.39	48.52	23.05	1118.39	82.4
54	24.2	374	947.83	48.49	23.92	1159.88	81.7
55	24.9	373	972.64	48.46	24.75	1199.39	81.1
56	26.3	374	1030.08	48.44	25.75	1247.33	82.6
57	27.4	373	1070.29	48.41	26.71	1293.03	82.8
58	28.1	371	1091.75	48.39	27.47	1329.27	82.1
59	29.1	370	1127.55	48.36	28.47	1376.81	81.9
60	30.2	370	1170.18	48.33	29.40	1420.90	82.4
61	31.4	369	1213.38	48.31	30.10	1454.13	83.4
62	32.2	354	1193.72	48.31	29.73	1436.26	83.1
63	33.3	342	1192.65	48.31	29.73	1436.26	83.0
64	34.3	331	1188.95	48.31	29.74	1436.74	82.8
65	35.5	318	1182.22	48.31	29.77	1438.19	82.2
66	36.7	308	1183.75	48.31	29.77	1438.19	82.3
67	37.7	299	1180.47	48.31	29.78	1438.67	82.1
68	38.7	290	1175.31	48.31	29.78	1438.67	81.7
69	39.8	282	1175.37	48.31	29.77	1438.19	81.7
70	41.0	273	1172.17	48.31	29.76	1437.71	81.5
71	41.9	266	1167.18	48.31	29.76	1437.71	81.2
72	42.8	258	1156.39	48.31	29.74	1436.74	80.5
73	43.8	251	1151.30	48.31	29.73	1436.26	80.2
74	45.1	243	1147.69	48.31	29.73	1436.26	79.9
75	45.8	237	1136.73	48.31	29.73	1436.26	79.1
76	47.5	231	1149.07	48.31	29.75	1437.22	80.0
77	48.3	225	1138.08	48.31	29.77	1438.19	79.1
78	49.4	218	1127.78	48.31	29.78	1438.67	78.4
79	50.6	213	1128.68	48.30	29.78	1438.37	78.5
80	51.9	207	1125.07	48.31	29.79	1439.16	78.2
81	52.0	202	1100.01	48.31	29.78	1438.67	76.5
82	53.8	197	1109.92	48.31	29.78	1438.67	77.1
83	54.2	193	1095.47	48.31	29.77	1438.19	76.2
84	55.9	187	1094.70	48.31	29.77	1438.19	76.1
85	56.9	182	1084.49	48.31	29.77	1438.19	75.4
86	57.7	178	1075.57	48.31	29.76	1437.71	74.8
87	58.8	173	1065.28	48.31	29.75	1437.22	74.1
88	59.9	169	1060.12	48.31	29.75	1437.22	73.8
89	61.1	165	1055.77	48.31	29.74	1436.74	73.5
90	61.7	160	1033.83	48.31	29.74	1436.74	72.0
91	63.7	157	1047.32	48.31	29.74	1436.74	72.9

型号: RM G060.1000 6T 90A 48V 编号: 12403050001 日期: 2024年3月5日

说明	转矩(N.m)	转速(r/min)	输出功率(W)	电压(V)	电流(A)	输入功率(W)	效率(%)
92	64.4	153	1031.86	48.31	29.73	1436.26	71.8
93	65.4	148	1013.64	48.31	29.72	1435.77	70.6
94	66.0	145	1002.20	48.31	29.72	1435.77	69.8
95	67.5	141	996.70	48.31	29.72	1435.77	69.4
96	68.4	137	981.34	48.31	29.72	1435.77	68.3
97	70.1	134	983.71	48.31	29.71	1435.29	68.5
98	70.6	130	961.15	48.31	29.71	1435.29	67.0
99	71.8	124	932.37	48.32	29.31	1416.26	65.8
100	72.9	115	877.95	48.35	28.19	1362.99	64.4
101	73.6	106	817.01	48.38	27.07	1309.65	62.4
102	75.1	97	762.88	48.41	25.71	1244.62	61.3
103	75.8	87	690.61	48.45	24.60	1191.87	57.9
104	76.2	68	542.63	48.51	21.99	1066.74	50.9
105	76.7	12	96.39	48.67	11.94	581.12	16.6
106	76.6	0	0.00	48.87	7.65	373.86	0.0