


POWER

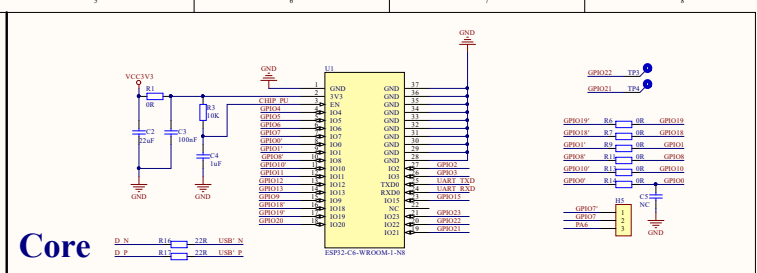

Core


R24

866K	820K	360K	160K
0.2A	0.27A	0.5A	1A

150K	82K	66K
1.2A	2A	2.5A


The diagram illustrates the R24 module's pin connections. The module has a 4-pin header (pins 1-4) and a 4-pin header (pins 5-8). The connections are as follows: Pin 1 (USB_V) to Pin 1 (USB_V), Pin 2 (USB_V-) to Pin 2 (USB_V-), Pin 3 (BAT) to Pin 3 (BAT), Pin 4 (BAT+) to Pin 4 (BAT+), Pin 5 (RST) to Pin 5 (RST), and Pin 6 (4-pin header) to Pin 6 (4-pin header). The module also has a 10k pull-up resistor on the BAT pin and a 10k pull-up resistor on the RST pin.

CHARGE

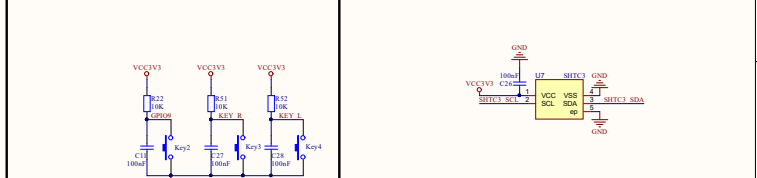


KEYS


SHTC3

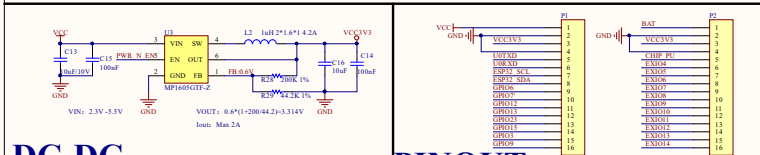


DC-DC

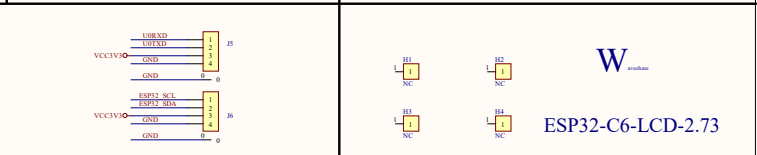

ESP32-C6-LCD-2.73

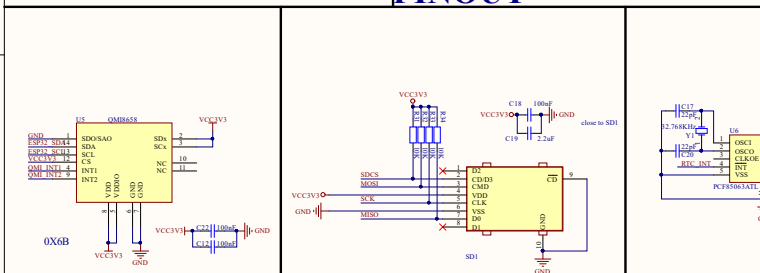


PINOUT

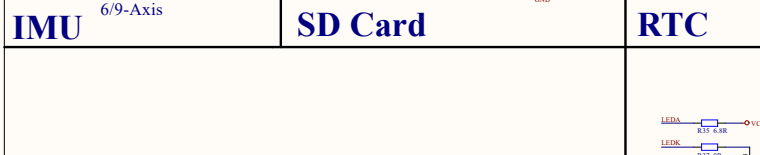


IMU


SD Card

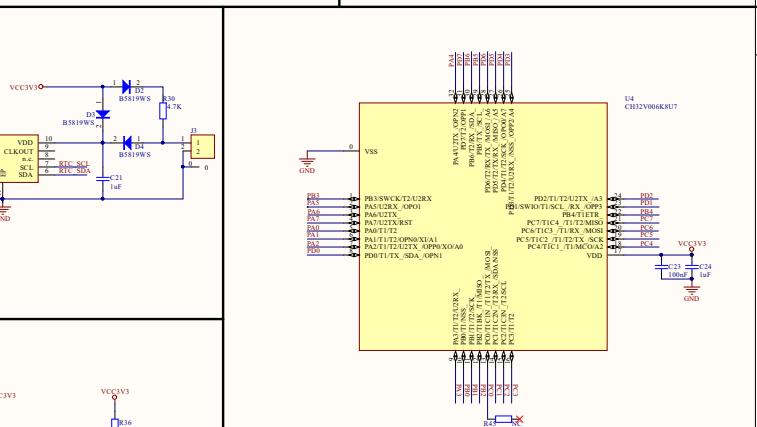

RTC

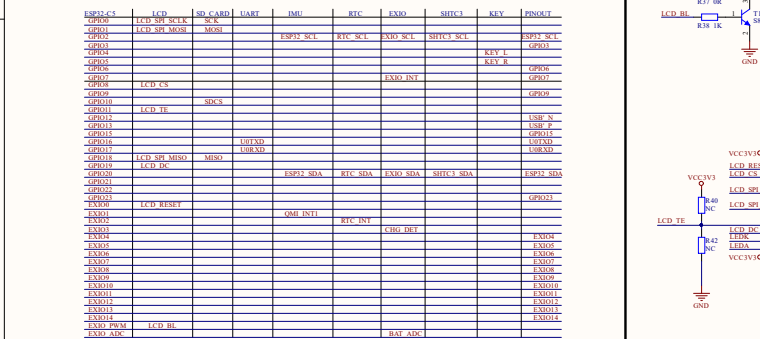

LCD

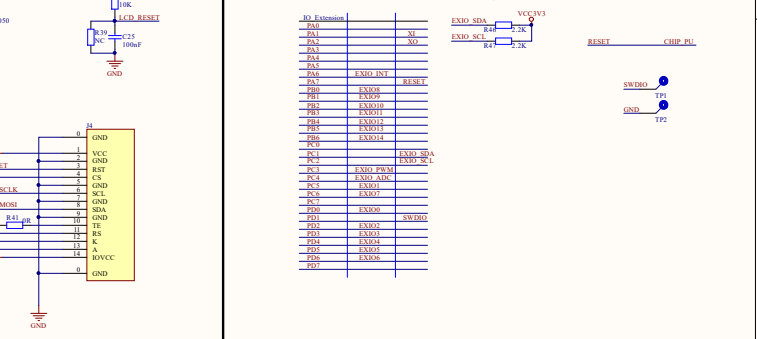

I/O Extensions