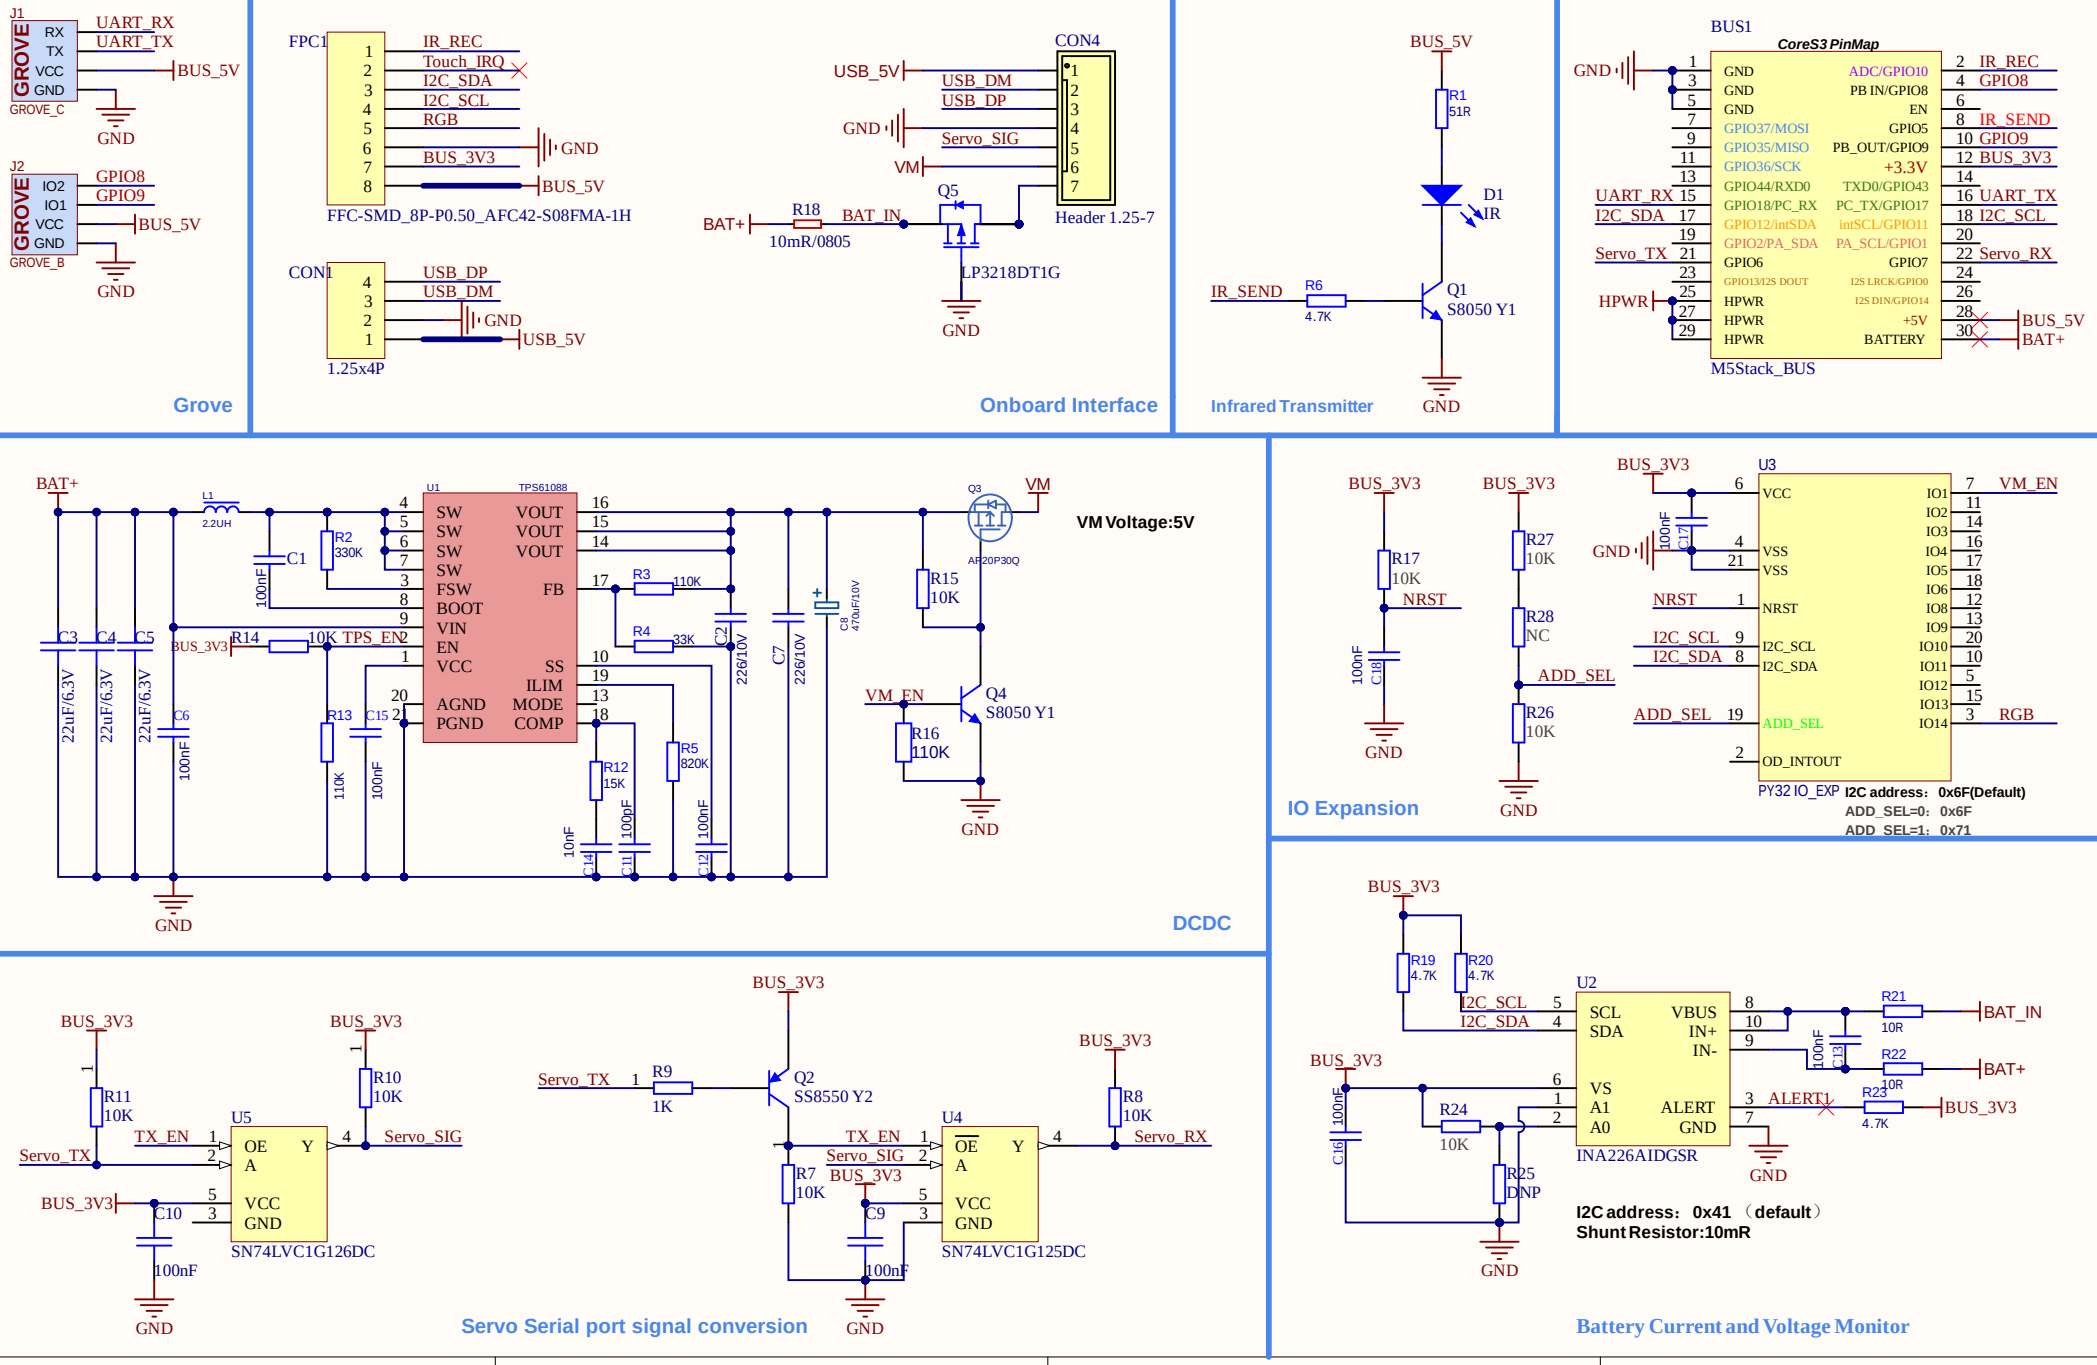

Grove
Onboard Interface
Infrared Transmitter
DCDC
VM Voltage:5V
IO Expansion
Servo Serial port signal conversion
Battery Current and Voltage Monitor
I2C address: 0x41 (default)
Shunt Resistor:10mR
I2C address: 0x6F(Default)
ADD_SEL=0: 0x6F
ADD_SEL=1: 0x71
CoreS3 PinMap
M5Stack_BUS
PY32 IO_EXP
INA226AIDGSR
SN74LVC1G126DC
SN74LVC1G125DC
TPS61088
FFC-SMD_8P-P0.50_AFC42-S08FMA-1H
Header 1.25-7
1.25x4P
LP3218DT1G
AP20P30Q
S8050 Y1
SS8550 Y2