

Pimoroni Tiny FX

6x Mono LED Outputs with Indicators

1x RGB LED Output with Indicator

1x 3W I2S Audio Output

JST-SUR Connector (Power In)

USB-C (Power, Data & Programming)

RP2040 with 4MB Flash

1x Reset & 1x Boot/User Button

1x QW/ST Connector

1x 3 pin Sensor Connector


JST Input: 3-6V

Sensors: Voltage In

Board Width

23.2mm

Pins and Dims

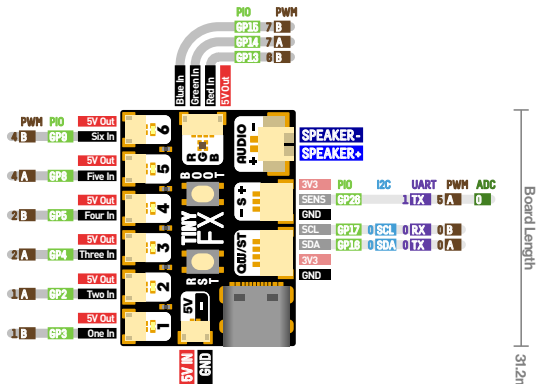

Pin Functions

■ High Power ■ Low Power ■ Ground ■ UART ■ Audio Output ■ I2C ■ PIO ■ ADC ■ PWM ■ IO

KEY: 0 SDA 