

ATMEGA328P-MU Core Board



16Mhz Max,2KB RAM,32KB ROM,1KB EEPROM

Modified from 0-1.es/B4 NANO Pinout

PWM Pin

Port power group


Power	Serial PIN
GND	PIN Function
Physical PIN	Interrupt PIN
Port PIN	Control PIN
Analog PIN	IDE

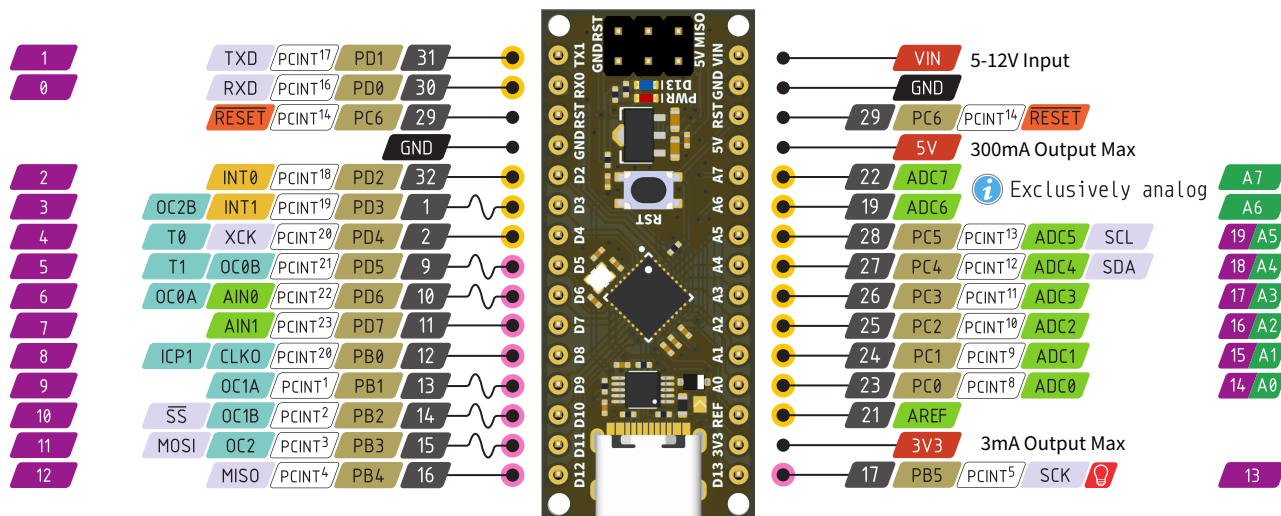

USB Connector
Type C

MCU: ATMEGA328P-MU
USB To Serial Chip: CH340X
LDO: ME6231A50PG, 18V->5V,500mA Max

ICSP Pinout

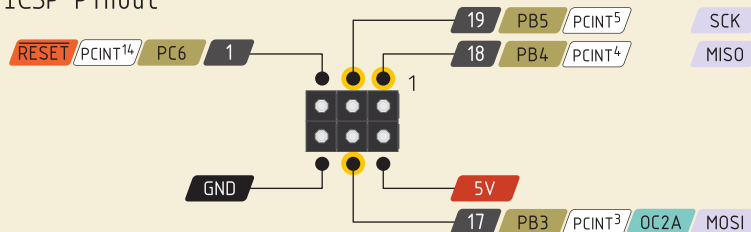

VIN Input voltage to the board when it's using an external power supply. Not USB bus voltage!

Absolute MAX per pin
40mA, 20mA recommended

Absolute MAX 200mA
for the entire package

The total current of each
port power group **should**
not exceed 100mA