

Inventor 2350 W (PIM733)

Raspberry Pi Pico

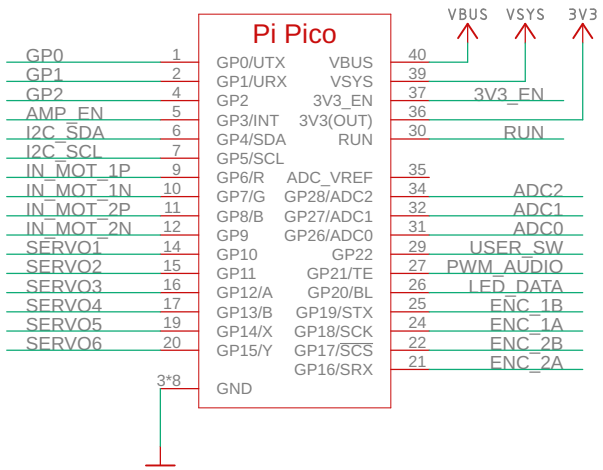

Dual motor driver, channels 1 and 2

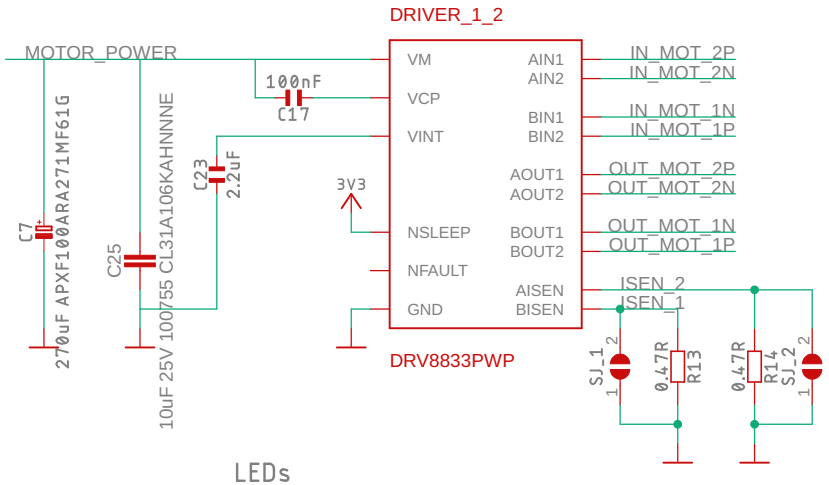


Current = 200mV/resistance
0.47ohm resistor -> 0.425A current


Resistor power: 0.425*0.2V = 0.085W

Battery connector


Suitable for any input voltage between 2V and 5.5V - i.e. a protected LiPo cell or 2/3xAAA battery holder.




These connections only for ease of routing



Qw/st connector

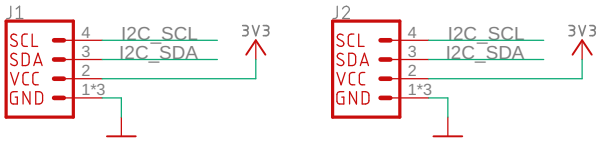


LEDs

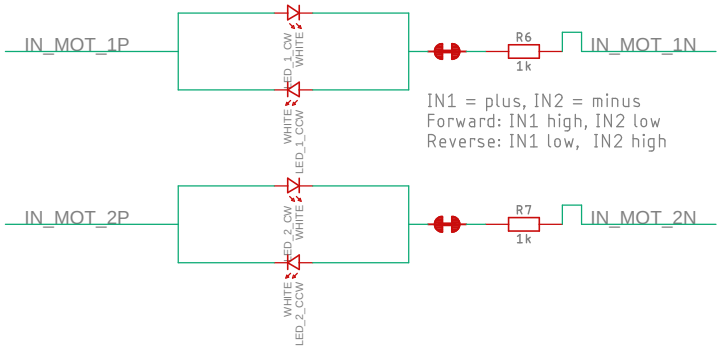


IN1 = plus, IN2 = minus
Forward: IN1 high, IN2 low
Reverse: IN1 low, IN2 high


Buttons

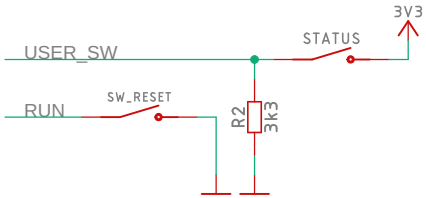


Servos/LED outputs

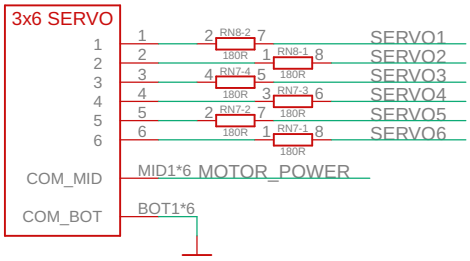


GPIO/ADC




Motor + Headers

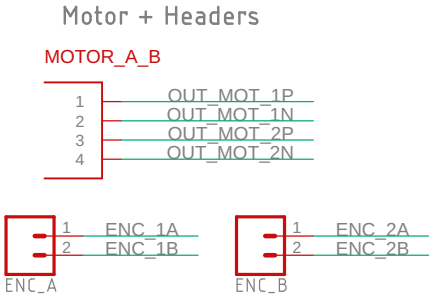

Motor+encoder connector, 1



Motor+encoder connector, 2




PIMORONI


DATE GENERATED
30/03/2026 12:28

SHEET
1/2

Inventor 2350 W (PIM733)


Audio amplifier

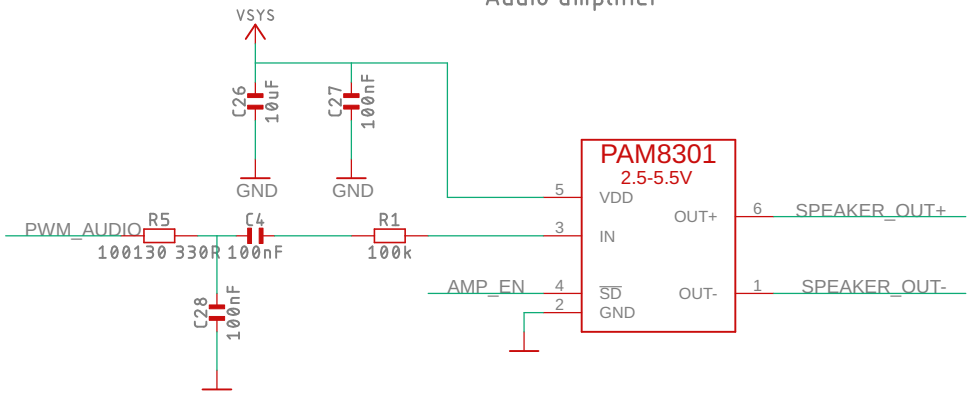




Power selection

VBUS: max 5.5V
VBAT: 2.5-5.5V

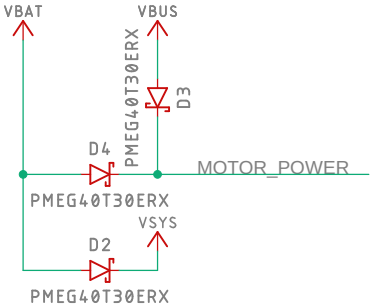

I2C pullup resistors



RGB LEDs

