

Reference Schematic for RV1126B

RV1126B AOV-IPC REF SCH BETA

DDPAI 叮叮拍		叮叮拍(深圳)技术股份有限公司	
Project:		RV1126B_AOVT_E9	
File:		00.Cover Page	
Date:	Wednesday, August 26, 2026	Size:	Rev1.0
Designed by:	LSL	Reviewed by:	jack>
		Sheet:	38f

Index and Notes

Catalogue	
Page	Description
Page01	00.Cover Page
Page02	01.Index and Notes
Page03	02.Revision History
Page04	03.Block Diagram
Page05	05.Power Diagram
Page06	06.IO Power Domain Map
Page07	07.I2C/UART/SAI Map
Page08	08.USB Map
Page09	10.RV1126B Power/GND
Page10	11.RV1126B OSC/PLL/PMU10/RTC
Page11	12.RV1126B DRAM Controller
Page12	13.RV1126B Flash/SDMMC
Page13	14.RV1126B USB Controller
Page14	15.RV1126B SARADC
Page15	16.RV1126B MIPI-CSI/RGMII
Page16	17.RV1126B CTF LCD
Page17	18.RV1126B Audio
Page18	19.RV1126B FEPHY
Page19	20.Power-DC IN/Charger
Page20	21.Power-Standby
Page21	21.Power-SOC
Page22	25.USB-USB2.0 Device
Page23	33.DRAM-LPDDR4X 1X32bit 200P
Page24	42.Flash-Micro-SD Card
Page25	43.Flash-SPI Flash
Page26	47.VI-Camera MIPI-CSI0
Page27	48.VI-Camera MIPI-CSI1
Page28	53.LED BOARD/CDS
Page29	60.WIFI-SDIO 1T1R
Page30	70.Audio Port
Page31	92.Key Array
Page32	98.UART Debug Port
Page33	99.Mark/Hole

Note

NOTE 1:
Component parameter description
1. DNP stands for component not mounted temporarily
2. If Value or option is DNP, which means the area is reserved without being mounted

NOTE 2:
Please use our recommended components to avoid too many changes.
For more informations about the second source,please refer to our AVL.

Generate Bill of Materials

Header:

Item\tPart\tDescription\tPCB Footprint\tReference\tQuantity\tOption

Combined property string:

{Item}\t{Value}\t{Description}\t{PCB Footprint}\t{Reference}\t{Quantity}\t{Option}

Graphic Description

Note

Option

Description

Revision History

Version	Date	Author	Change Note	Approved
V1.0	2026.08.12	LYH	First edition;	

<Variant Name>

DDPAI

钉钉拍

钉钉拍(深圳)技术股份有限公司

Project:

RV1126B_AOVT_E9

File:

02.Revision History

Date:

Wednesday, August 26, 2026

Size:

A4

Rev:

1.0

Designed by:

LSL


Reviewed by:

All

Sheet:


3 of 37

功能框图



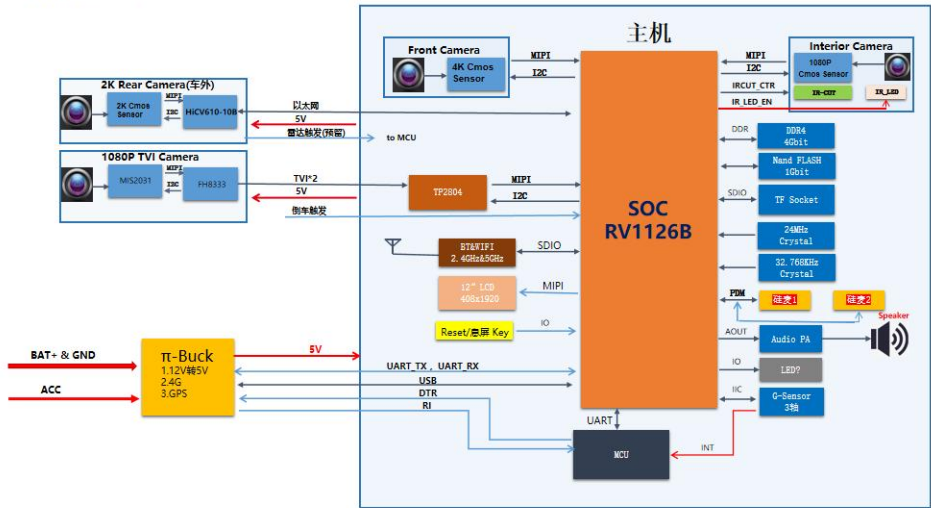


<Variant Name>					
DOPA 叮叮拍(深圳)技术股份有限公司					
叮叮拍					
Project: RV1126B_AQVT_E9					
File: 03.Block Diagram					
Date:	Wednesday, August 15, 2024	Doc:	A3	Rev:	1.0
Designed by:	LCL	Reviewed by:	JR	Checked:	A dt 37

Power Diagram and Sequence

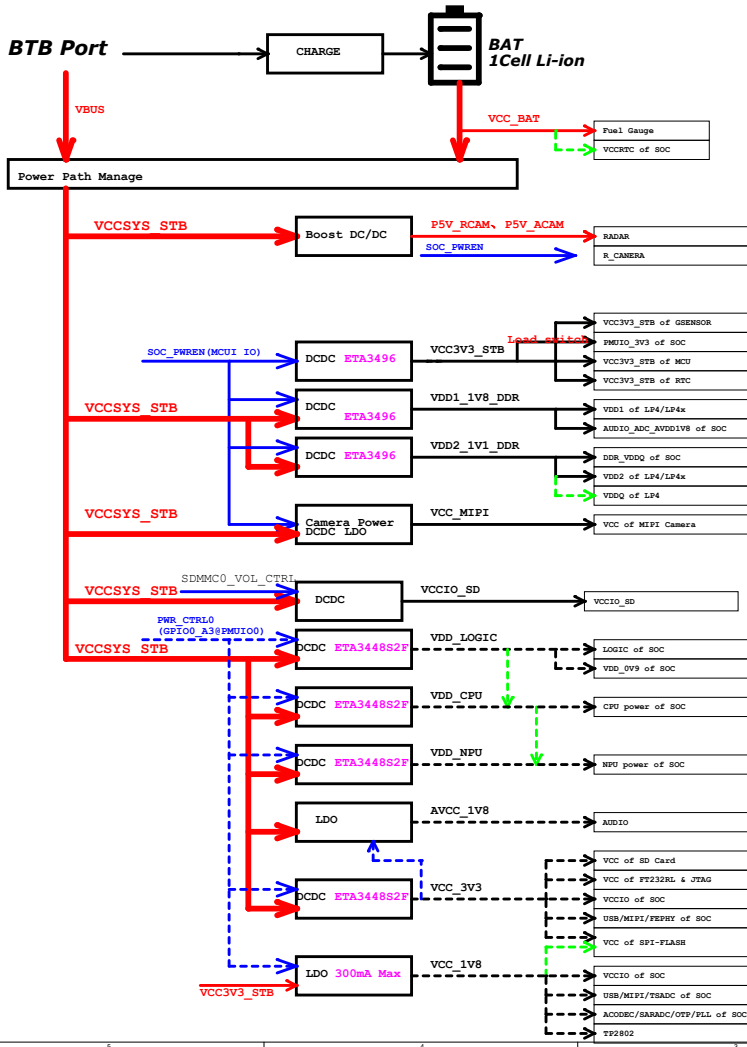


SOC Power-on Sequence				
Power Name	Power Channel	Time Slot	Default voltage	Peak Current
VCCSYS_STB	Path Switch	Slot: 0	5V/VBAT	
VCC3V3_STB	Low Ig BUCK	Slot: 0	3.3V	
VDDIOPS_PMI00(GPI00_A3)	EXT LDO	Slot: 1	0.9V	
VCC3V3_PMI00	Load Switch	Slot: 1	3.3V	
VDD_LOGIC	BUCK	Slot: 2	0.9V	1.5A
VDD_CPU	BUCK	Slot: 2	0.9V	2A
VCC_NPU	BUCK	Slot: 2	0.9V	
VCC_RPU	Low Ig BUCK	Slot: 3	1.14V/0.9V	2A
VCC_1V8	LDO	Slot: 3	1.8V	
VCC_3V3	BUCK	Slot: 4	3.3V	
RESET			Low after VCC3V3_PMI00 is ready, internal nPOR will be asserted	

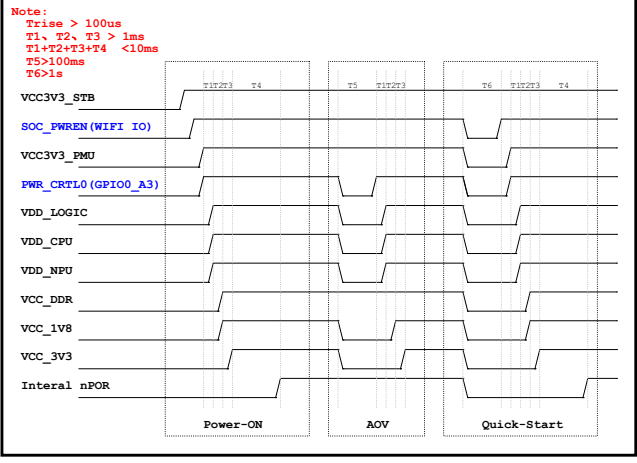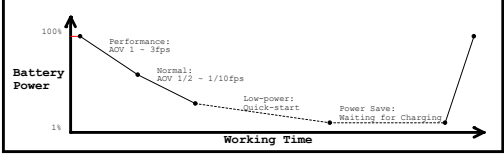

<Variant Name>
DDPAI 叮叮拍(深圳)技术股份有限公司
RTBT7B
Project: **RV1128B_AQVT E9**
File: **04.Power Diagram**
Date: Wednesday, August 18, 2020
Designed by: LCL
Reviewed by: JM
Size: A3
Rev: 1.0
Sheet: 5 of 37

USB Map

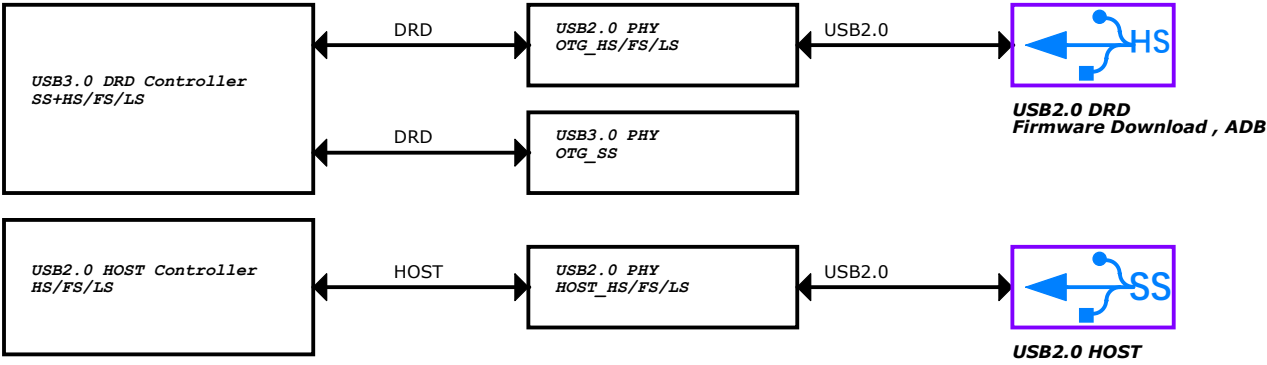

	Case1 (Recommend)	Case2 (Recommend)	Case3
USB 2.0 DRD (FW download Default)	USB2.0 DRD	Combined for USB3.0 DRD	USB2.0 HOST
USB 3.0 DRD	N/A		Combined for USB3.0 HOST
USB 2.0 HOST	USB2.0 HOST	USB2.0 HOST	


<Variant Name>									
DDPAI 钉钉拍		钉钉拍(深圳)技术股份有限公司							
Project:		RV1126B_AOVT_E9							
File:		05.USB Map							
Date:	Wednesday, August 26, 2026				Size:	A4	Rev:	1.0	
Designed by:	LSL		Reviewed by:	All		Sheet:		6	of 37

IO Power Domain Map


IO Domain	IO Group	Support of IO Voltage		Default Actual assigned IO Domain Voltage			Remark
		1.8V	3.3V	Net Name of Power Supply	Power Source	Voltage	
PMUIO0	Group GPIO0_A/B0~4		✓	VCC3V3_PMUIO0	VCC3V3_PMU	3.3V	
PMUIO1	Group GPIO0_C/D0~1	✓	✓	VCC3V3_PMUIO1	VCC3V3_PMU	3.3V	
VCCIO1	Group GPIO1_AB	✓	✓	VCCIO_FLASH	VCC_1V8 VCC_3V3	1.8/3.3V	
VCCIO2	Group GPIO2_A0~A5	✓	✓	VCCIO_SD	EXT ADJ LDO	1.8/3.3V	
VCCIO3	Group GPIO3_AB	✓	✓	VCC_VCCIO3	VCC_3V3	3.3V	
VCCIO4	Group GPIO4_A/B0~1	✓	✓	VCC_VCCIO4	VCC_1V8	1.8V	
VCCIO5	Group GPIO6_ABCD	✓	✓	VCC_VCCIO5	VCC_3V3	3.3V	
VCCIO6	Group GPIO6_AB/C0~3	✓	✓	VCC_VCCIO6	VCC_1V8	1.8V	
VCCIO7	Group GPIO7_A/B0~1	✓	✓	VCC_VCCIO7	VCC_3V3	3.3V	

<Variant Name>							
				钉钉拍(深圳)技术股份有限公司			
Project:				RV1126B_AOVT_E9			
File:				06.IO Power Domain Map			
Date:	Wednesday, August 26, 2026			Size:	A4	Rev:	1.0
Designed by:	LSL	Reviewed by:	Ali	Sheet:	7	of	37


I2C MAP

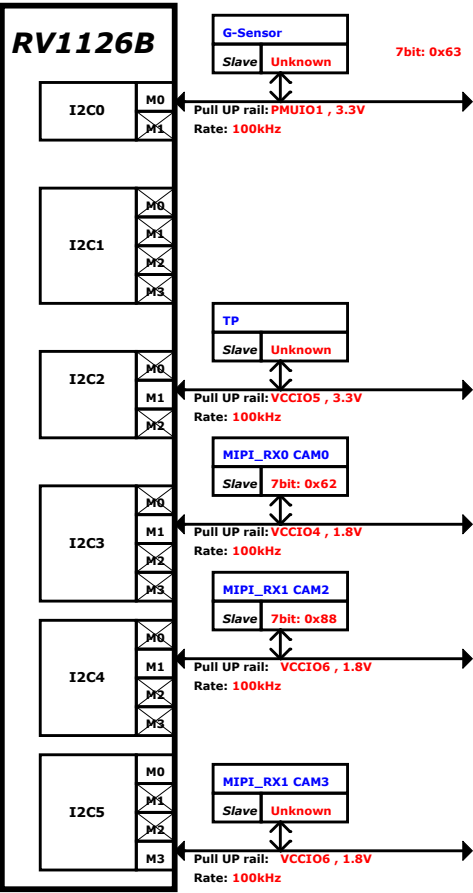

UART MAP

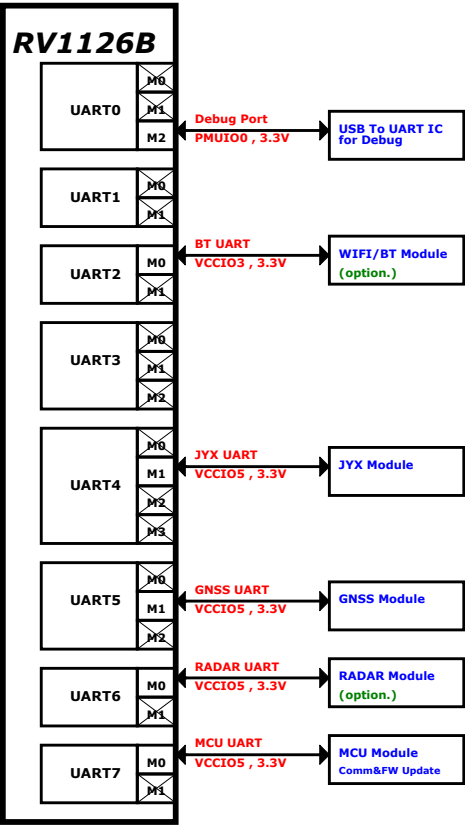

Audio MAP

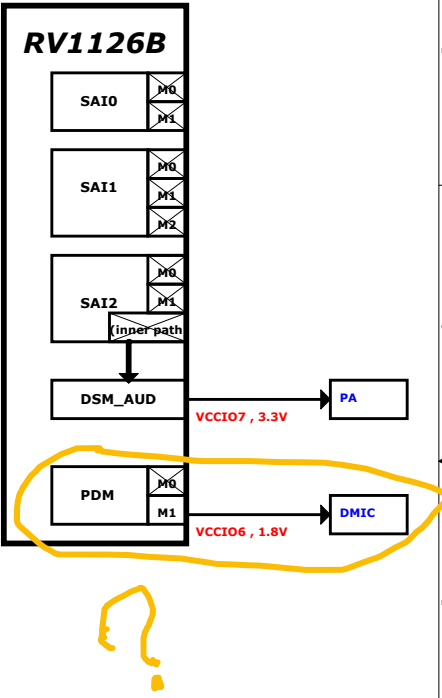


Note 1:

M0 Unselected IOMUX path
M1 IOMUX path in use


At the same time, only one path can be selected.

DOPAI 叮叮拍(深圳)技术股份有限公司	
Project:	RV1126B_AQVT_E9
File:	07.I2C/UART/SAI Map
Date:	Wednesday, August 26, 2020
Designed by:	LCL
Reviewed by:	JM
Drawn:	1.0
Sheet:	5 of 37

GND

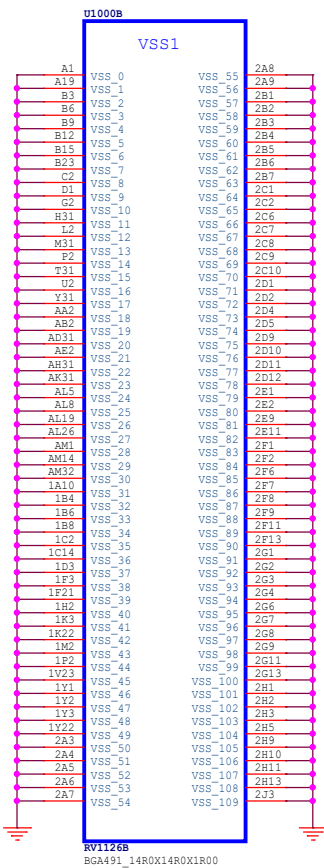


Power

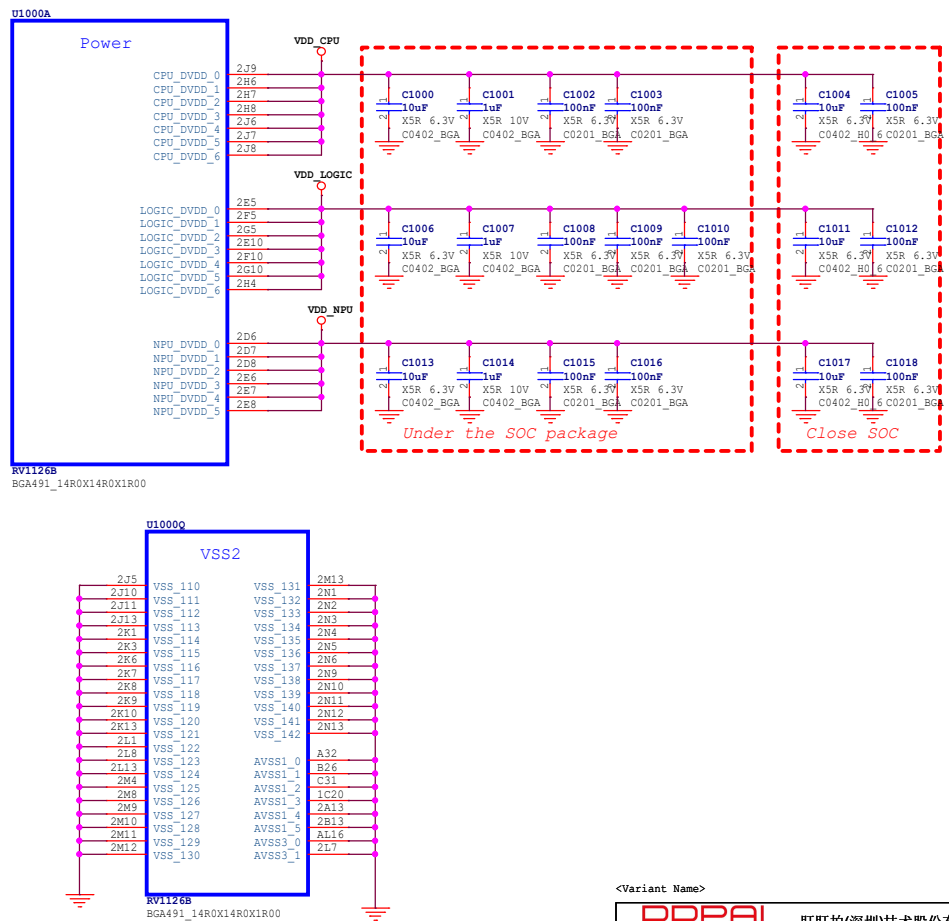


<Variant Name>

DDPAI		钉钉拍(深圳)技术股份有限公司	
Project:		RV1126B_AOVT_E9	
File:		09.RV1126B_Power/GND	
Date:	Wednesday, August 26, 2026	Size:	A4
Designed by:	LSL	Reviewed by:	All
Sheet:		9 of 37	

OSC/PLL/PMUIO

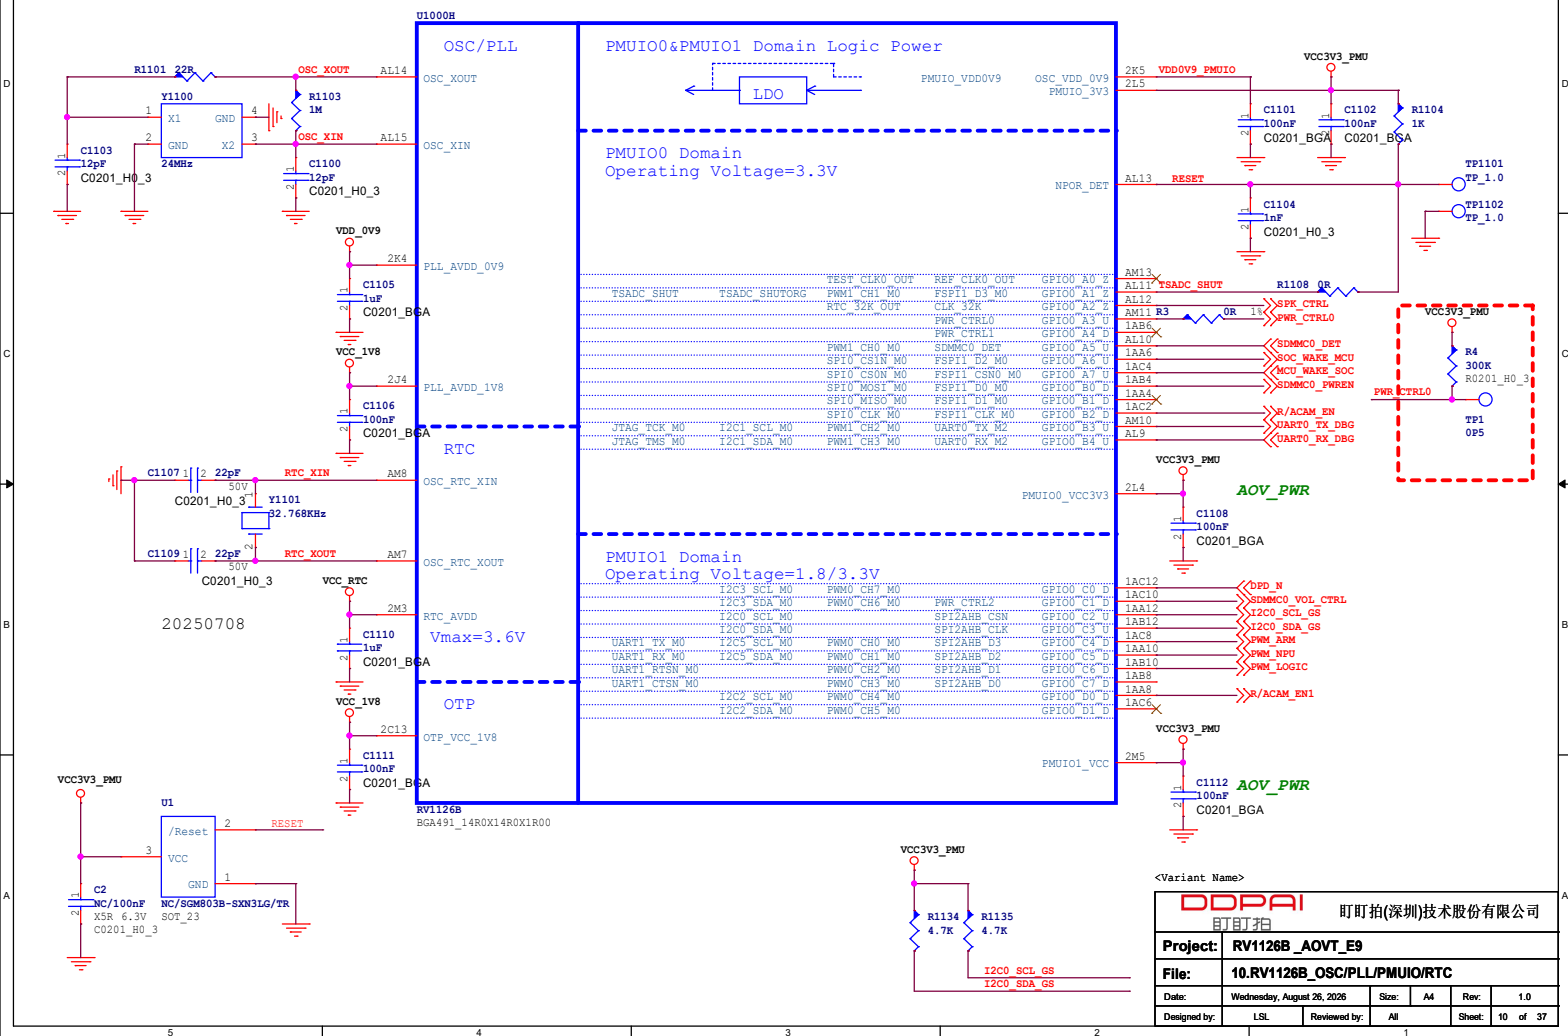


DDR Controller

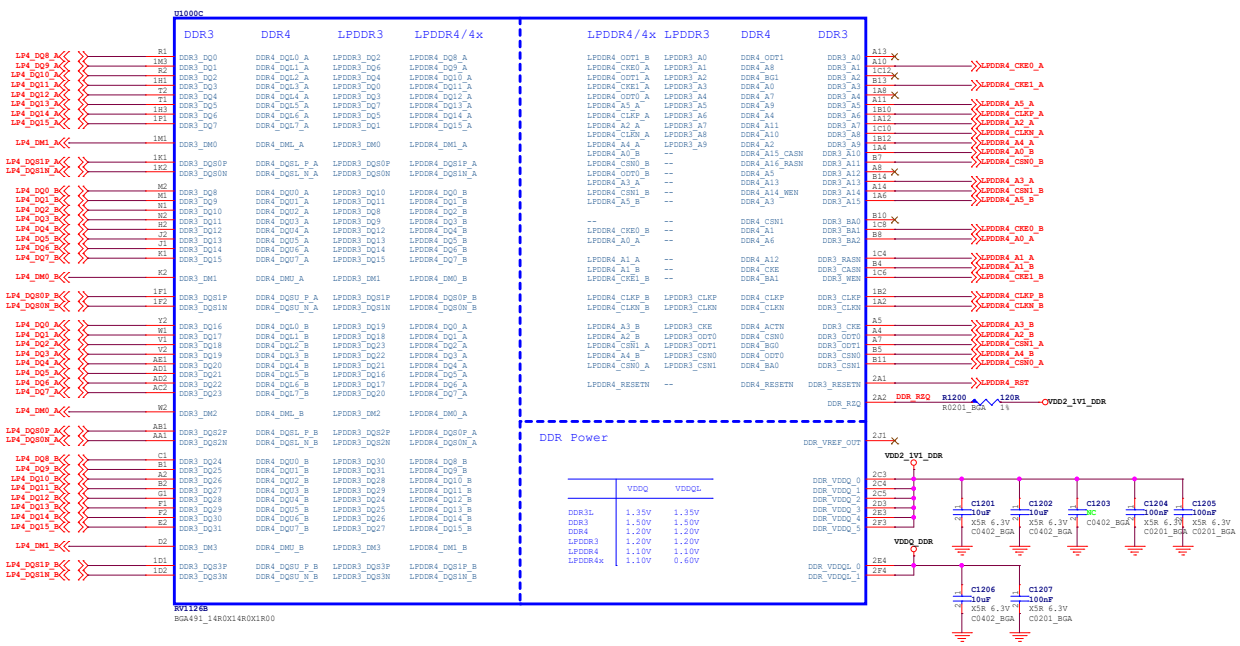


<Variant Name>					
DDPAI 叮叮拍		叮叮拍(深圳)技术股份有限公司			
Project:	RV1126B_AOVT_E9				
File:	11.RV1126B_DRAM_Controller				
Date:	Wednesday, August 26, 2026	Size:	A3	Rev:	1.0
Designed by:	L.S.L	Reviewed by:	Al	Sheet:	11 of 37

EMMC/FLASH

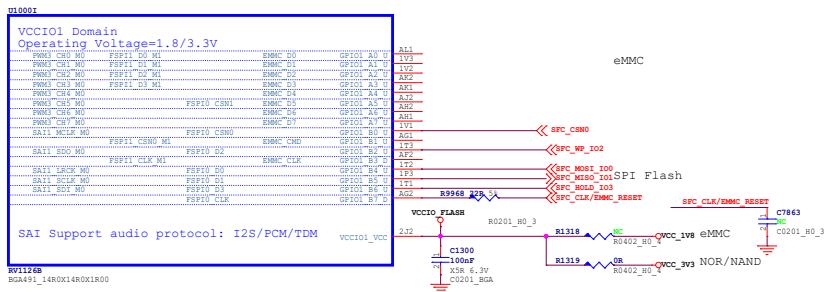


SDMMC0/JTAG/SDMMC1/UART/I2S2

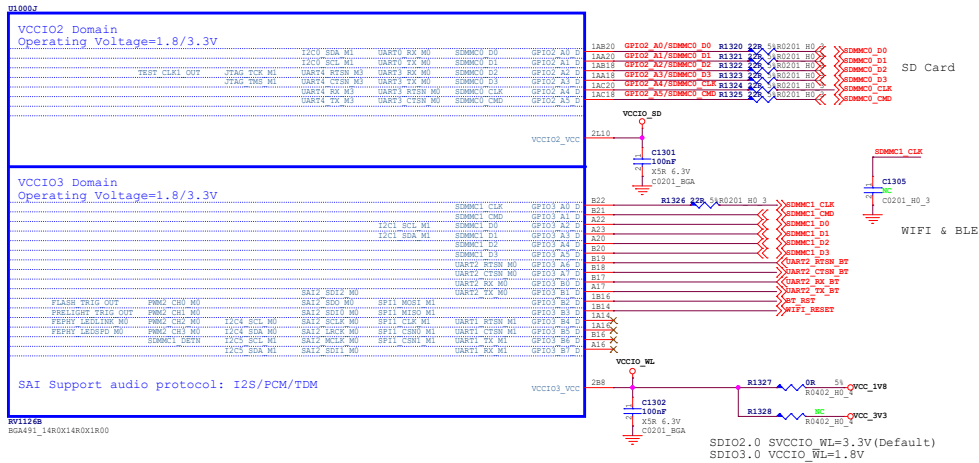

<Variant Name>

 叮叮拍(深圳)技术股份有限公司	
Project:	RV1126B_AOVT_E9
File:	12.RV1126B_Flash/SDMMC
Date:	Wednesday, August 26, 2026
Size:	A3
Rev:	1.0
Designed by:	LSL
Reviewed by:	Ali
Sheet:	12 of 37



USB Controller

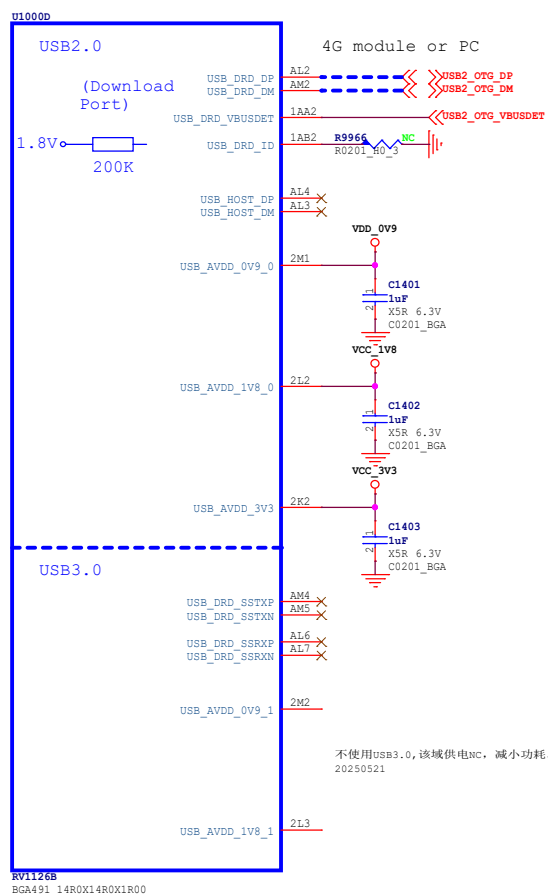

Note:

USB2.0 design rules:

1. Max intra-pair skew <4ps
2. Max trace length<6inchs
3. Max allowed via <6
4. Trace impedance 90ohm+/-10%
5. The distance between other signals follows the 3W rule.





不使用USB3.0,该域供电NC,减小功耗。
20250521

<Variant Name>

 叮叮拍(深圳)技术股份有限公司	
Project: RV1126B_AOVT_E9	
File: 13.RV1126B_USB Controller	
Date:	Wednesday, August 26, 2026
Size:	A4
Rev:	1.0
Designed by:	LSL
Reviewed by:	All
Sheet:	13 of 37

SARADC0

SARADC0_IN0_KEY >>>
SARADC0_IN1_CDS >>>

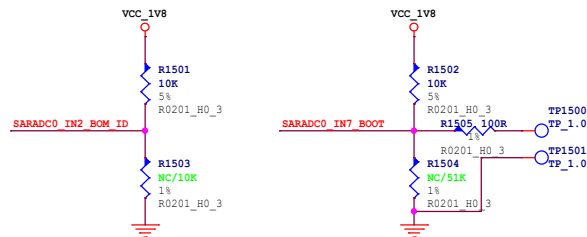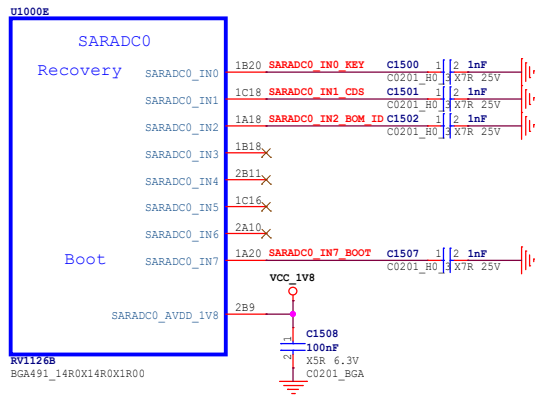


Item	Rpu	Rpd	SARADC0_IN7 Boot Mode
Config1	NC	10K	USB/UART0 (Maskrom mode)
Config2	100K	20K	FSPI0--SDMMC0--USB/UART0
Config3	100K	68K	FSPI0--EMMC--USB/UART0
Config4	100K	120K	EMMC--USB/UART0
Config5	100K	200K	EMMC--SDMMC0--USB/UART0
Config6	100K	560K	SDMMC0--USB/UART0
Config7	√ 10K	NC	FSPI0--EMMC--SDMMC0--USB/UART0 (Auto mode)


<Variant Name>

		叮叮拍(深圳)技术股份有限公司			
					
Project:	RV1126B_AOVT_E9				
File:	14.RV1126B_SARADC				
Date:	Wednesday, August 26, 2026		Size:	A4	Rev: 1.0
Designed by:	LSL	Reviewed by:	All	Sheet:	14 of 37


CIF Interface

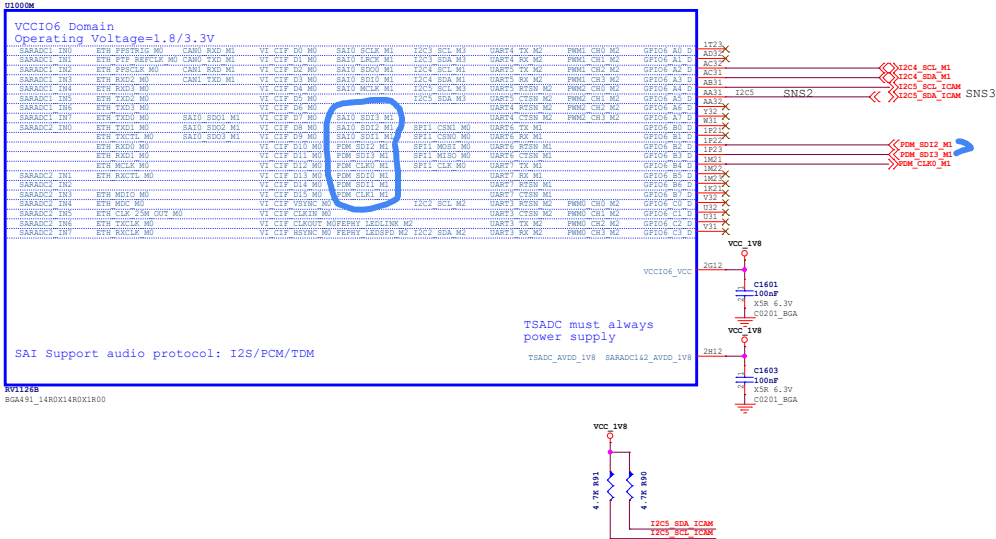

MIPI-CSI Interface

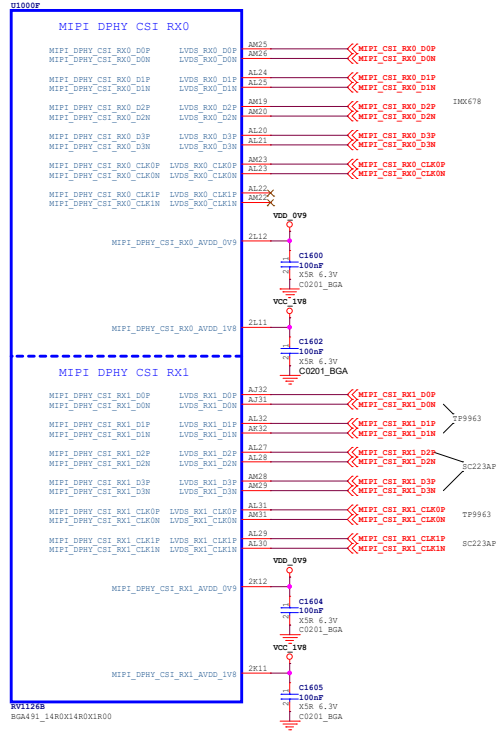



I2C/SPI/MIPI-CLK

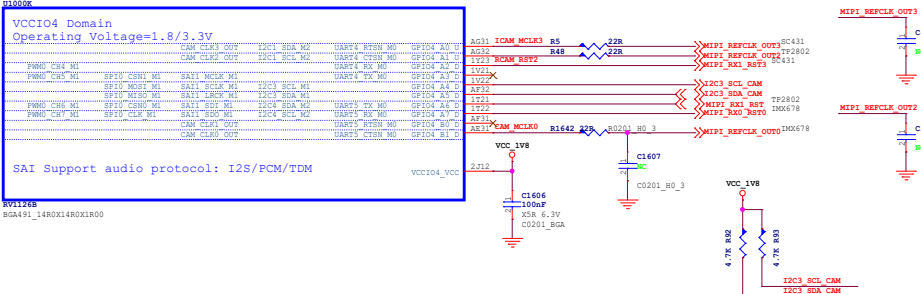

<Variant Name>

DDPAI		町町拍(深圳)技术股份有限公司	
町町拍			
Project:	RV1126B_AOVT_E9		
File:	15.RV1126B_MIP1-CSU/RGM1		
Date:	Wednesday, August 26, 2026	Size:	A3
Designed by:	LS	Reviewed by:	AI
		Sheet:	15 of 37


VCCIO5 Domain Operating Voltage=1.8/3.3V									
12C5_SCL_M1	D5MC_C0B1	SA17_B02F_M1	ETH_TXD3_M1	UART4_R7B1_M1	PW02_C0A4_M0	VI_CIFP_D0_M1	VO_LCDD0_D0	GP05A_A1_D0	
	D5MC_C1B1	SA17_B01F_M1	ETH_TXD2_M1	UART4_C7B1_M1	PW02_C0B5_M0	VI_CIFP_D1_M1	VO_LCDD1_D1	GP05A_A1_D1	
	D5MC_C1B3	SA17_B03F_M1	ETH_PP0CLK_M1	UART5_TX_M1	PW03_C0A3_M0	VI_CIFP_C0_M1	VO_LCDD2_D0	GP05A_A1_D2	
	D5MC_D1A4	SA17_M0LAF_M1	SP10_C0B0_M2	UART4_B0_M1	PW02_C0A4_M0	VO_LCDD3_D3	GP05A_A1_D3		
	D5MC_D1B3	SA17_M0LAF_M1	SP10_M0LAF_M1	UART5_TX_M1	PW03_C0B3_M0	VO_LCDD4_D4	GP05A_A1_D4		
	D5MC_D1C2	SA17_B01F_M1	SP10_C0B0_M2	UART5_B0_M1	PW02_C0B2_M1	VO_LCDD5_D5	GP05A_A1_D5		
	D5MC_D1D1	SA17_B02F_M1	SP10_C0B0_M2	UART5_R7B1_M1	PW02_C0B1_M1	VO_LCDD6_D6	GP05A_A1_D6		
12C5_S0A_M1	D5MC_D1D2	SA17_L0C0F_M1	ETH_TXD3_M1	UART5_C7B1_M1	PW03_C0B4_M0	VO_LCDD7_D7	GP05A_A1_D7		
	D5MC_D1D3	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D4	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D5	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D6	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D7	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D8	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D9	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D10	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D11	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D12	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D13	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D14	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D15	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D16	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D17	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D18	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D19	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D20	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D21	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D22	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D23	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D24	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D25	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D26	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D27	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D28	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D29	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D30	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D31	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D32	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D33	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D34	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D35	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D36	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D37	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D38	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D39	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D40	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D41	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D42	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D43	ETH_TXD0F_M1	UART5_TX_M1						
	D5MC_D1D44	ETH_TXD0F_M1	UART5_TX_M1						

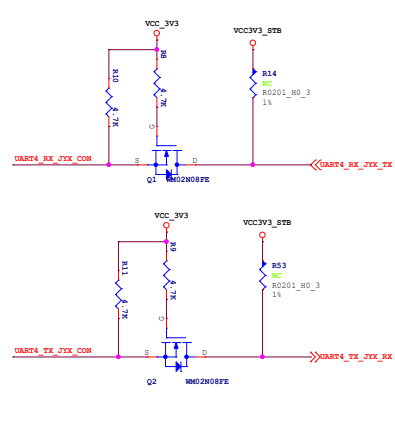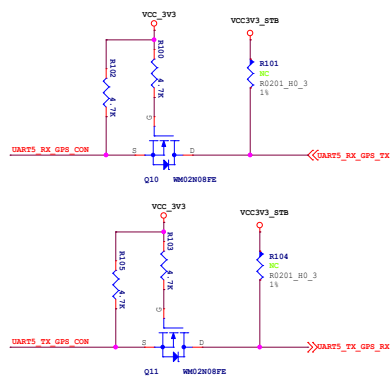[illegible]


<Variant Name>

DDPAI		叮叮拍(深圳)技术股份有限公司	
叮叮拍			
Project:	RV1126B_AOVT_E9		
File:	16.RV1126B_CIF_LCDC		
Date:	Wednesday, August 28, 2025	Size:	A3
Designed by:	LSL	Reviewed by:	All
		Sheet:	16 of 37

Audio Interface

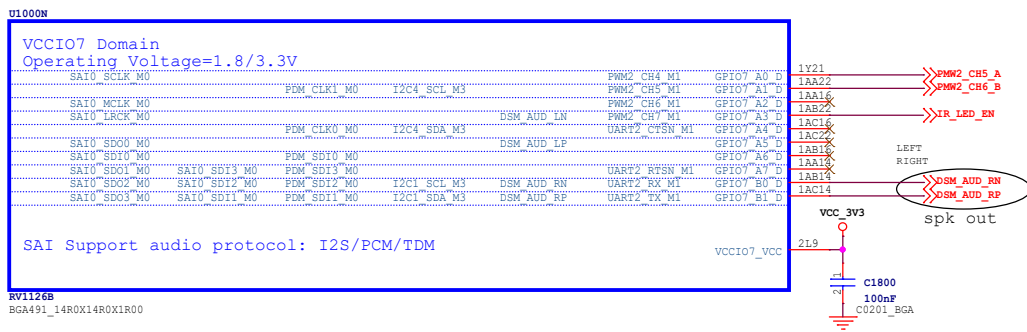


Audio ADC

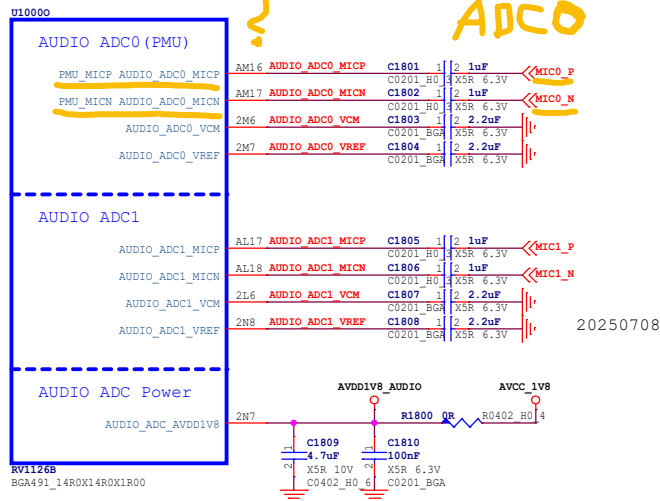



<Variant Name>

DDPAI		叮叮拍(深圳)技术股份有限公司			
叮叮拍					
Project:	RV1126B_AOVT_E9				
File:	17.RV1126B_Audio				
Date:	Wednesday, August 26, 2026		Size:	A4	Rev: 1.0
Designed by:	LSL	Reviewed by:	All	Sheet:	17 of 37

FEPHY

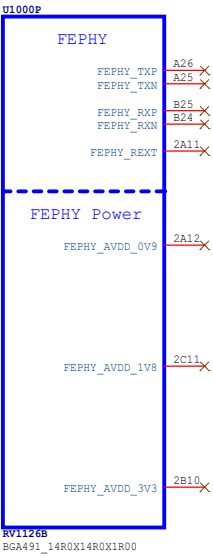



<Variant Name>						
DDPAI 钉钉拍 钉钉拍(深圳)技术股份有限公司						
Project:		RV1126B_AOVT_E9				
File:		18.RV1126B_FEPHY				
Date:	Wednesday, August 26, 2026			Size:	A4	Rev: 1.0
Designed by:	LSL	Reviewed by:	Ali	Sheet: 18 of 37		

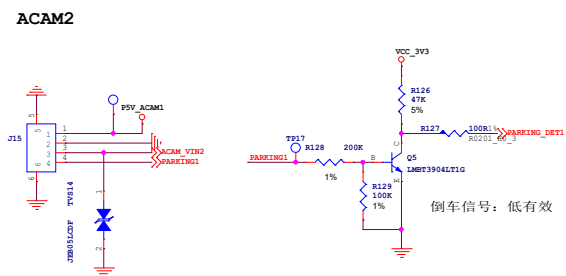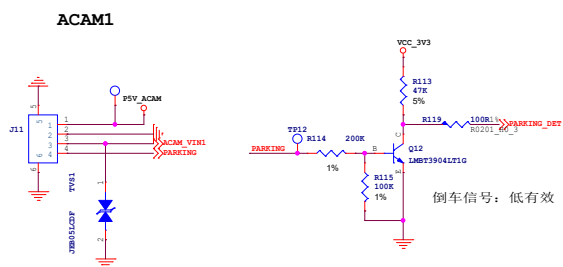

<Variant Name>

 叮叮拍(深圳)技术股份有限公司				
Project:	RV1128B_AOVT_E9			
File:	19_RCAM_connector			
Date:	Wednesday, August 26, 2026	Size:	A3	Rev: 1.0
Designed by:	LSL	Reviewed by:	Ali	Sheet: 19 of 37

wafar POWER IN

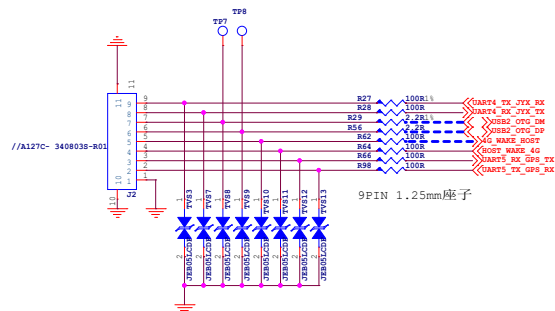


OVP阈值设置

VBG	R138	R139
1.191	1M	249K

$$V_{OUT} = V_{BG} * (1 + R1/R2) = 5.955V$$

OVP

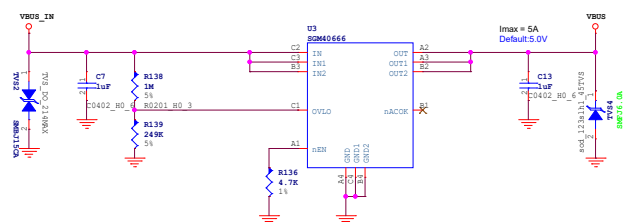


OC保护设置
Ilim_TYP=4.5/R136
Ilim_TYP=4.5/910R=5A


Power Path Manger

Step 0


Step 0



Diode



CHARGE



<Variant Name>

DDPA
盯盯拍

叮叮拍(深圳)技术股份有限公司

Project:	RV1126B_AOVT_E9
----------	-----------------

File:	20.Power-DC IN//Charger
-------	-------------------------

Date:	Monday, August 31, 2026		Size:	A3	Rev:	1.0
Designed by:	LSL	Reviewed by:	AI	Sheet:	20 of 37	

[illegible]

The schematic diagram illustrates the power supply section of the AOV_PWR_0V circuit. It features a central integrated circuit, U4 (RTA3496), which is configured as a voltage regulator. The input pin (VIN) is connected to the VCC5V3_STB supply through a 2.2µH inductor (L1). The output pin (FB/OUT) provides the regulated 0V output, which is also connected to the GND pin. The feedback pin (FB) is connected to the output through a network consisting of a 2.2kΩ resistor (R40) and a 10kΩ capacitor (C11). The ground pins (GND) are connected to the common ground. Various other components are shown, including capacitors C9 (10µF), C29 (100nF), and C30 (100nF), and resistors R47 (180Ω), R48 (100Ω), and R49 (100Ω). The circuit is powered by a 5.3V supply (VCC5V3_STB) and has a 0V output (AOV_PWR_0V).

The image displays two circuit diagrams for the SOC_PWRSEN pin, showing its connection to the VCCS18 and VCCS19 regulators.

Top Diagram (VCCS18):

- Input:** SOC_PWRSEN (10V source, 4.7uF capacitor).
- Regulator:** U2102 (L2101, 2.2uH).
- Output:** VCCS18_F8B.
- Components:** C2107 (4.7uF), R2118 (1k), C2112 (100nF), R2101 (1k), C2108 (10pF), R2111 (50k), C2109 (10uF), C2110 (100nF), R2102 (1k), C2103 (10uF), R2104 (1k), C2105 (10uF), R2106 (1k), C2107 (10uF), R2108 (1k), C2109 (10uF), R2110 (1k), C2111 (10uF), R2112 (1k), C2113 (10uF), R2114 (1k), C2115 (10uF), R2116 (1k), C2117 (10uF), R2118 (1k), C2119 (10uF), R2120 (1k), C2121 (10uF), R2122 (1k), C2123 (10uF), R2124 (1k), C2125 (10uF), R2126 (1k), C2127 (10uF), R2128 (1k), C2129 (10uF), R2130 (1k), C2131 (10uF), R2132 (1k), C2133 (10uF), R2134 (1k), C2135 (10uF), R2136 (1k), C2137 (10uF), R2138 (1k), C2139 (10uF), R2140 (1k), C2141 (10uF), R2142 (1k), C2143 (10uF), R2144 (1k), C2145 (10uF), R2146 (1k), C2147 (10uF), R2148 (1k), C2149 (10uF), R2150 (1k), C2151 (10uF), R2152 (1k), C2153 (10uF), R2154 (1k), C2155 (10uF), R2156 (1k), C2157 (10uF), R2158 (1k), C2159 (10uF), R2160 (1k), C2161 (10uF), R2162 (1k), C2163 (10uF), R2164 (1k), C2165 (10uF), R2166 (1k), C2167 (10uF), R2168 (1k), C2169 (10uF), R2170 (1k), C2171 (10uF), R2172 (1k), C2173 (10uF), R2174 (1k), C2175 (10uF), R2176 (1k), C2177 (10uF), R2178 (1k), C2179 (10uF), R2180 (1k), C2181 (10uF), R2182 (1k), C2183 (10uF), R2184 (1k), C2185 (10uF), R2186 (1k), C2187 (10uF), R2188 (1k), C2189 (10uF), R2190 (1k), C2191 (10uF), R2192 (1k), C2193 (10uF), R2194 (1k), C2195 (10uF), R2196 (1k), C2197 (10uF), R2198 (1k), C2199 (10uF), R2200 (1k), C2201 (10uF), R2202 (1k), C2203 (10uF), R2204 (1k), C2205 (10uF), R2206 (1k), C2207 (10uF), R2208 (1k), C2209 (10uF), R2210 (1k), C2211 (10uF), R2212 (1k), C2213 (10uF), R2214 (1k), C2215 (10uF), R2216 (1k), C2217 (10uF), R2218 (1k), C2219 (10uF), R2220 (1k), C2221 (10uF), R2222 (1k), C2223 (10uF), R2224 (1k), C2225 (10uF), R2226 (1k), C2227 (10uF), R2228 (1k), C2229 (10uF), R2230 (1k), C2231 (10uF), R2232 (1k), C2233 (10uF), R2234 (1k), C2235 (10uF), R2236 (1k), C2237 (10uF), R2238 (1k), C2239 (10uF), R2240 (1k), C2241 (10uF), R2242 (1k), C2243 (10uF), R2244 (1k), C2245 (10uF), R2246 (1k), C2247 (10uF), R2248 (1k), C2249 (10uF), R2250 (1k), C2251 (10uF), R2252 (1k), C2253 (10uF), R2254 (1k), C2255 (10uF), R2256 (1k), C2257 (10uF), R2258 (1k), C2259 (10uF), R2260 (1k), C2261 (10uF), R2262 (1k), C2263 (10uF), R2264 (1k), C2265 (10uF), R2266 (1k), C2267 (10uF), R2268 (1k), C2269 (10uF), R2270 (1k), C2271 (10uF), R2272 (1k), C2273 (10uF), R2274 (1k), C2275 (10uF), R2276 (1k), C2277 (10uF), R2278 (1k), C2279 (10uF), R2280 (1k), C2281 (10uF), R2282 (1k), C2283 (10uF), R2284 (1k), C2285 (10uF), R2286 (1k), C2287 (10uF), R2288 (1k), C2289 (10uF), R2290 (1k), C2291 (10uF), R2292 (1k), C2293 (10uF), R2294 (1k), C2295 (10uF), R2296 (1k), C2297 (10uF), R2298 (1k), C2299 (10uF), R2300 (1k), C2301 (10uF), R2302 (1k), C2303 (10uF), R2304 (1k), C2305 (10uF), R2306 (1k), C2307 (10uF), R2308 (1k), C2309 (10uF), R2310 (1k), C2311 (10uF), R2312 (1k), C2313 (10uF), R2314 (1k), C2315 (10uF), R2316 (1k), C2317 (10uF), R2318 (1k), C2319 (10uF), R2320 (1k), C2321 (10uF), R2322 (1k), C2323 (10uF), R2324 (1k), C2325 (10uF), R2326 (1k), C2327 (10uF), R2328 (1k), C2329 (10uF), R2330 (1k), C2331 (10uF), R2332 (1k), C2333 (10uF), R2334 (1k), C2335 (10uF), R2336 (1k), C2337 (10uF), R2338 (1k), C2339 (10uF), R2340 (1k), C2341 (10uF), R2342 (1k), C2343 (10uF), R2344 (1k), C2345 (10uF), R2346 (1k), C2347 (10uF), R2348 (1k), C2349 (10uF), R2350 (1k), C2351 (10uF), R2352 (1k), C2353 (10uF), R2354 (1k), C2355 (10uF), R2356 (1k), C2357 (10uF), R2358 (1k), C2359 (10uF), R2360 (1k), C2361 (10uF), R2362 (1k), C2363 (10uF), R2364 (1k), C2365 (10uF), R2366 (1k), C2367 (10uF), R2368 (1k), C2369 (10uF), R2370 (1k), C2371 (10uF), R2372 (1k), C2373 (10uF), R2374 (1k), C2375 (10uF), R2376 (1k), C2377 (10uF), R2378 (1k), C2379 (10uF), R2380 (1k), C2381 (10uF), R2382 (1k), C2383 (10uF), R2384 (1k), C2385 (10uF), R2386 (1k), C2387 (10uF), R2388 (1k), C2389 (10uF), R2390 (1k), C2391 (10uF), R2392 (1k), C2393 (10uF), R2394 (1k), C2395 (10uF), R2396 (1k), C2397 (10uF), R2398 (1k), C2399 (10uF), R2400 (1k), C2401 (10uF), R2402 (1k), C2403 (10uF), R2404 (1k), C2405 (10uF), R2406 (1k), C2407 (10uF), R2408 (1k), C2409 (10uF), R2410 (1k), C2411 (10uF), R2412 (1k), C2413 (10uF), R2414 (1k), C2415 (10uF), R2416 (1k), C2417 (10uF), R2418 (1k), C2419 (10uF), R2420 (1k), C2421 (10uF), R2422 (1k), C2423 (10uF), R2424 (1k), C2425 (10uF), R2426 (1k), C2427 (10uF), R2428 (1k), C2429 (10uF), R2430 (1k), C2431 (10uF), R2432 (1k), C2433 (10uF), R2434 (1k), C2435 (10uF), R2436 (1k), C2437 (10uF), R2438 (1k), C2439 (10uF), R2440 (1k), C2441 (10uF), R2442 (1k), C2443 (10uF), R2444 (1k), C2445 (10uF), R2446 (1k), C2447 (10uF), R2448 (1k), C2449 (10uF), R2450 (1k), C2451 (10uF), R2452 (1k), C2453 (10uF), R2454 (1k), C2455 (10uF), R2456 (1k), C2457 (10uF), R2458 (1k), C2459 (10uF), R2460 (1k), C2461 (10uF), R2462 (1k), C2463 (10uF), R2464 (1k), C2465 (10uF), R2466 (1k), C2467 (10uF), R2468 (1k), C2469 (10uF), R2470 (1k), C2471 (10uF), R2472 (1k), C2473 (10

Only for LPDDR4x

VCC3V3_STB

C31 10µF

X58 10V

04002_W0_6

SOCM2590D

R42 10K

C34 100nF

X38 3V3

Default: SOCM2590D

C201 100_31lm=6612/RT1Im=0.982(A)=1.5A

Set Ilim based on actual load

VCC3V3_PMT

C32 4.7µF

C33 100nF

X38 10V

X39 4.7V

04002_W0_3

21240404

2008-04-18

Note:
Change the power supply according to the actual camera model used.
RK suggest AVDD(LDO from VCC3V3_STB),DOVDD/DVDD(BUCK from VCCSYS_STB).

<Variant Name>

 叮叮拍(深圳)技术股份有限公司				
Project:	RV1126B_AOVT_E9			
File:	21.Power.Standby			
Date:	Wednesday, Aug 26, 2026	Size:	A3	Rev: 1.0
Designed by:	LSL	Reviewed by:	Ali	Sheet: 21 of 37

```

RADAR_INT_N >>> _____
CS6286_INT >>> _____
GS_INT1 >>> _____
4G_WAKE_HOST >>> _____ 4G_WAKEUP
SOC_WAKE_MCU >>> _____
PWR_KEY >>> _____

MCU GPIO OUT
SOC_PWREN >>> _____
MCU_WAKE_SOC >>> _____ WAKEUP_4G
HOST_WAKE_4G >>> _____

PWR_CTRL0 <<< _____

MCU UART
UART7_RX_MCU <<< _____
UART7_TX_MCU <<< _____

```



SOC_PWREN **R45** **NC/OR** **PWR_CTRL0**
R0201 **NU** **3**

If AOV is supported, the device will be NC
At EVT, check if we can remove

SWDIO **R44** **NC/OR** **CS6286_INT**
R0201 **NU** **3**



SWCLK **R80** **NC/FPGA** **INT_N**

Pin	Signal	Connector
VCC	VCC3V3_STB	TP2300
SWCLK	SWCLK	TP2301
SWDIO	SWDIO	TP2302
SWD	(Grounded)	TP2303

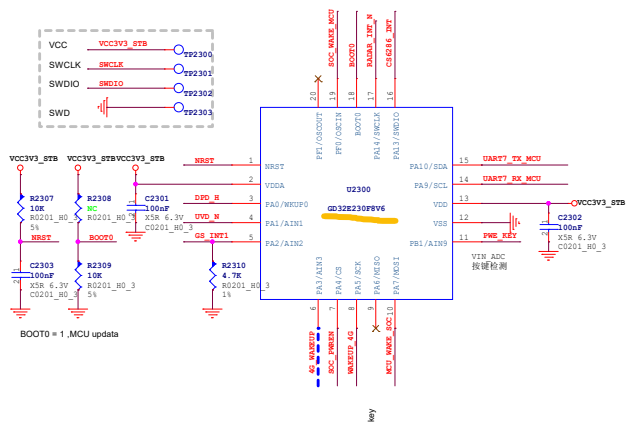[illegible]

Undervoltage detection

The diagram illustrates an undervoltage detection circuit. It features a voltage divider (R231, 100k) connected to VCC5V_STB, a divider (R232, 10k) connected to VOUT, and a divider (R233, 10k) connected to VCC5V_STB. The DS230C02A is configured with VCC5V_STB to VIN, VOUT to VOUT, and VCC5V_STB to VCC5V_STB. The output of the comparator is connected to VCC5V_STB. The circuit also includes a 100nF capacitor (C2309) connected to VOUT and a 10nF capacitor (C2308) connected to VCC5V_STB. The output of the comparator is connected to VCC5V_STB.



<Variant Name>

DDPA
叮叮拍

叮叮拍(深圳)技术股份有限公司

Project:	RV1126B_AOVT_E9
----------	-----------------


File:	23.Power-MCU
-------	--------------

Date:	Wednesday, August 26
-------	----------------------


Designed by:	LSL	Reviewed by:	Ali	Sheet:	22 of 3
--------------	-----	--------------	-----	--------	---------

[illegible]


VCCSYS_STB--->VDD_LOGIC (OFF @AOV Sleep Stage)
Step 2

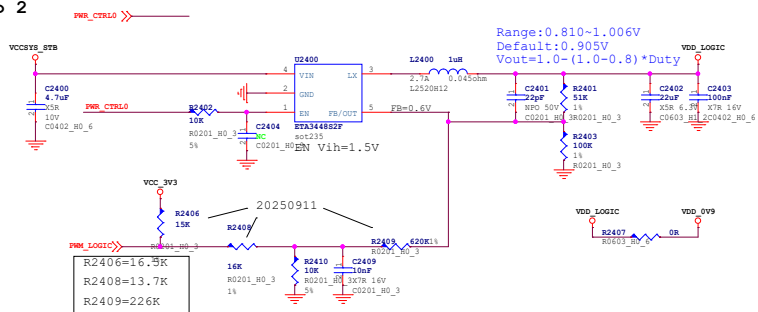


VCCSYS_STB--->VDD_CPU (OFF @AOV Sleep Stage)
Step 2

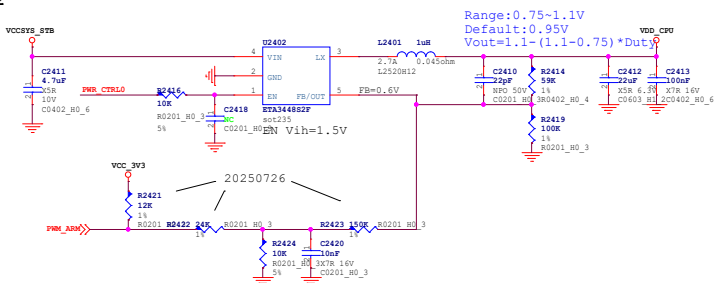


VCCSYS_STB--->VDD_NPU (OFF @AOV Sleep Stage)
Step 2

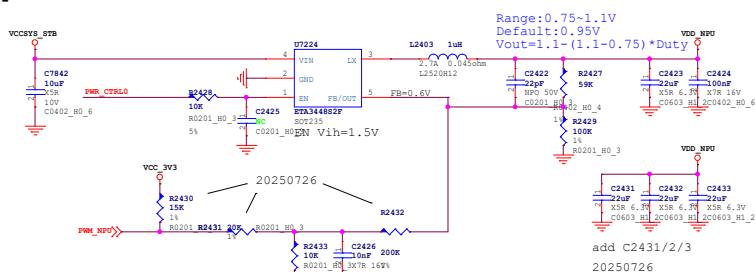


VCC3V3_STB--->VCC_1V8 (OFF @AOV Sleep Stage)
Step 3



VCCSYS_STB--->VCC_3V3 (OFF @AOV Sleep Stage)
Step 4




VCC3V3_STB--->AVCC_1V8 (OFF @AOV Sleep Stage)
Step 3

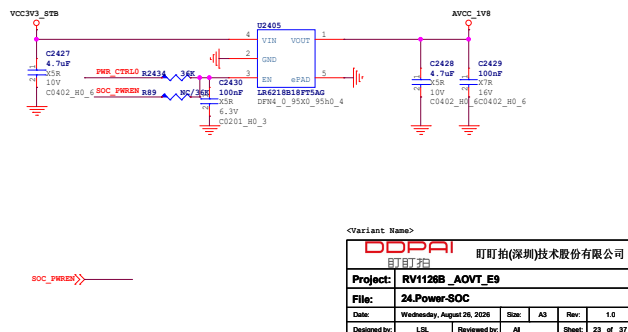

DIPAI 叮叮拍(深圳)技术股份有限公司	
RTBT3B	
Project:	RV1128B_AOV E9
File:	24Power-SOC
Date:	Wednesday, August 16, 2023
Designed by:	LC
Reviewed by:	AD
Drawn:	23 of 37

GSENSOR/3D

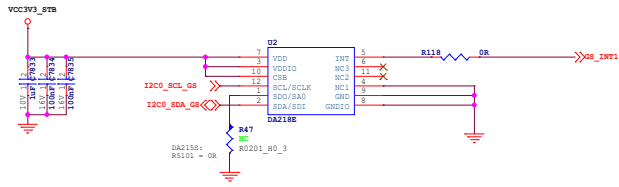

<Variant Name>

DDPA
叮叮拍

叮叮拍(深圳)技术股份有限公司




Project:	RV1126B_AOVT_E9
----------	-----------------

File:	25.GSENSOR
-------	------------

Date:	Wednesday, August 26, 2026		Size:	A3	Rev:	1.0
Designed by:	LSL	Reviewed by:	HSM	Sheet:	24 of 37	



Note:
Sequence: VDD1-VDD2-VDDQ

	LPDDR4	LPDDR4X
VDD1:	1.70-1.95	1.70-1.95
VDD2:	1.06-1.17	1.06-1.17
VDDQ:	1.06-1.17	0.57-0.65

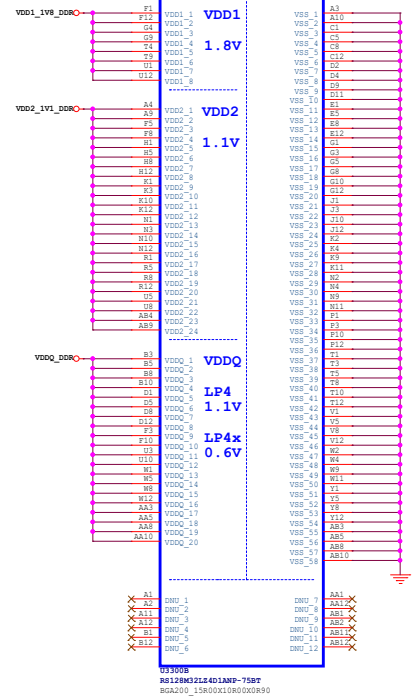
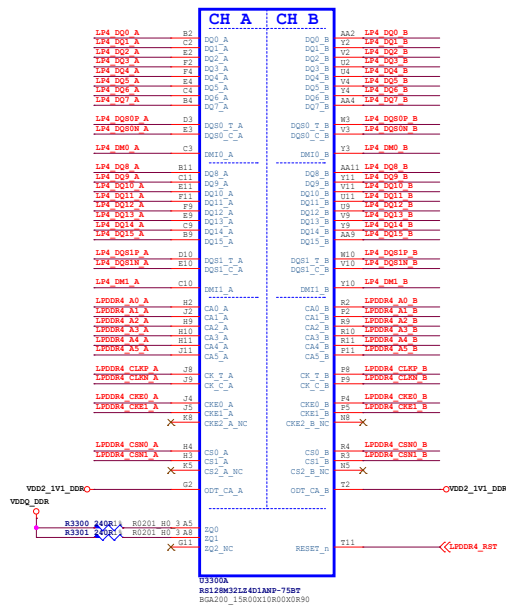
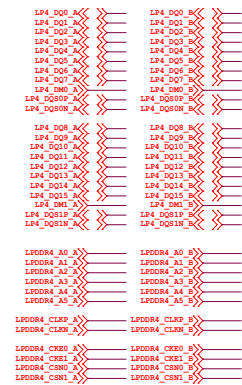


Note:
Sequence: VDD1-VDD2-VDDQ

	LPDDR4	LPDDR4X
VDD1:	1.70-1.95	1.70-1.95
VDD2:	1.06-1.17	1.06-1.17
VDDQ:	1.06-1.17	0.57-0.65

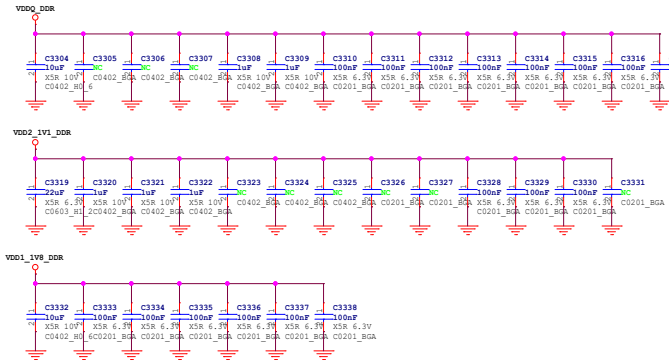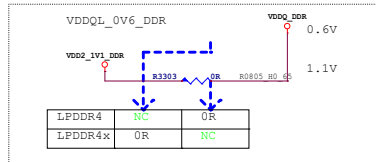


Variant Name>				
DDPAI		町町拍(深圳)技术股份有限公司		
町町拍				
Project:	RV1126B_AOVT_E9			
File:	26.DRAM-LPDDR4X_1X32bit_200P			
Date:	Wednesday, August 26, 2026	Size:	A3	Rev: 1.0
Designed by:	LSL	Reviewed by:	AM	Sheet: 25 of 37

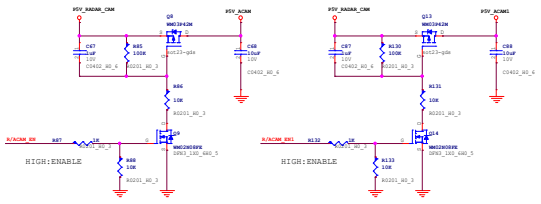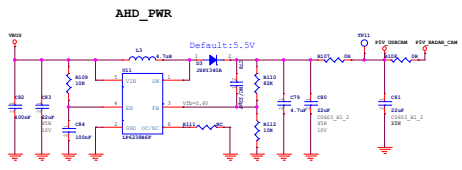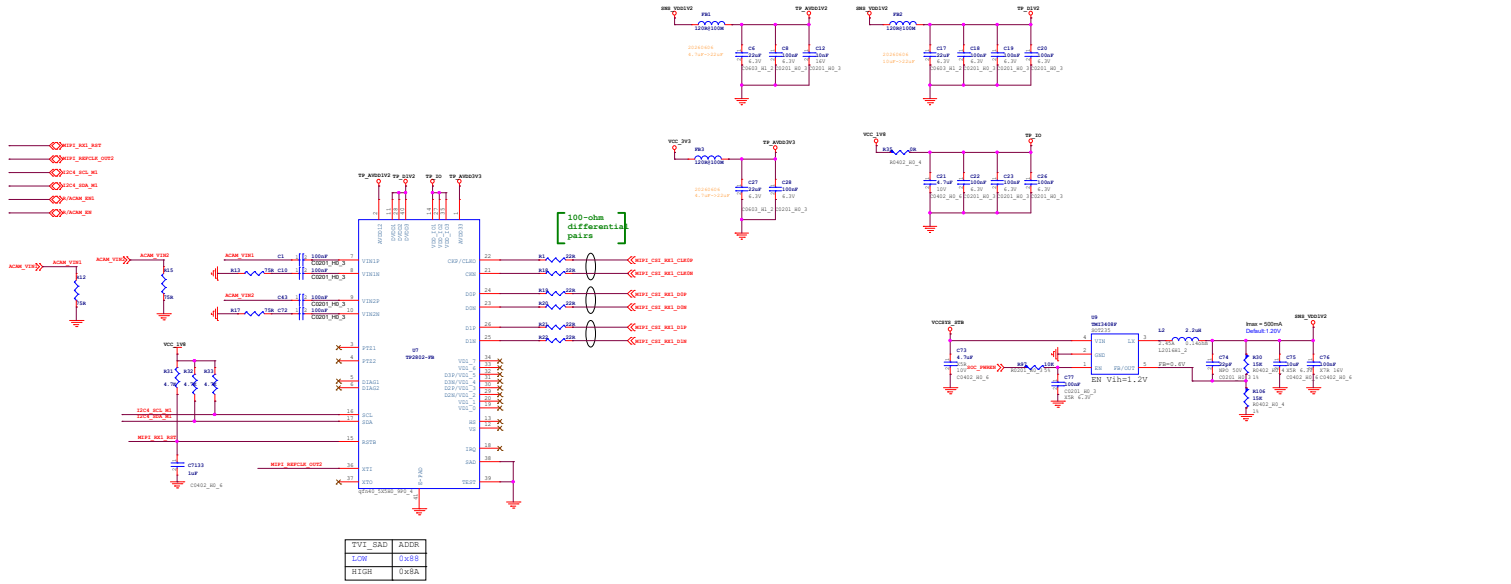

		杭州海康威视数字技术有限公司
Project: RV1126B_AONV_E9		File: 27_TV26B0_Rear_Camera
Date: 2023-03-20		Draw: 1.0
Designed by:		Check:


Nand Flash

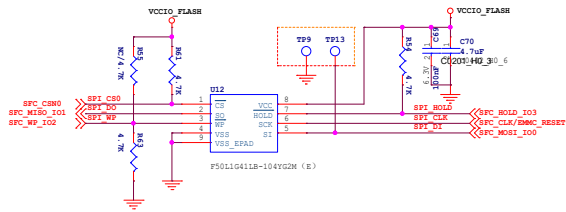


<Variant Name>									
DDPAI RT8178 叮叮拍(深圳)技术股份有限公司									
Project:		RV1126B_AOVT_E9							
File:		28.Flash-eMMC Flash							
Date:	Wednesday, August 18, 2022	Doc:	AD	Rev:	1.0				
Designed by:	LCL	Reviewed by:	AM	Checked:	27	of 37			

Micro-SD Card


Card Power



WPM2026-3/TR

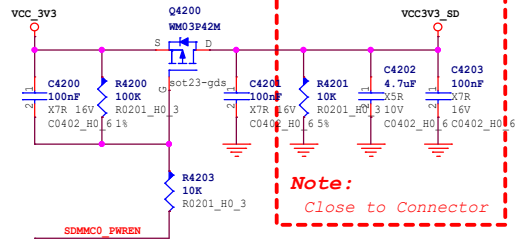


SDMMC0_PWREN=L VCC3V3_SD=3.3V (Default)
SDMMC0_PWREN=H VCC3V3_SD=0V

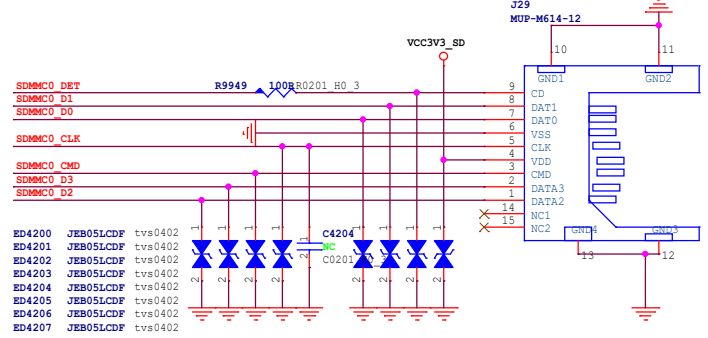

20250723

Card IO Power

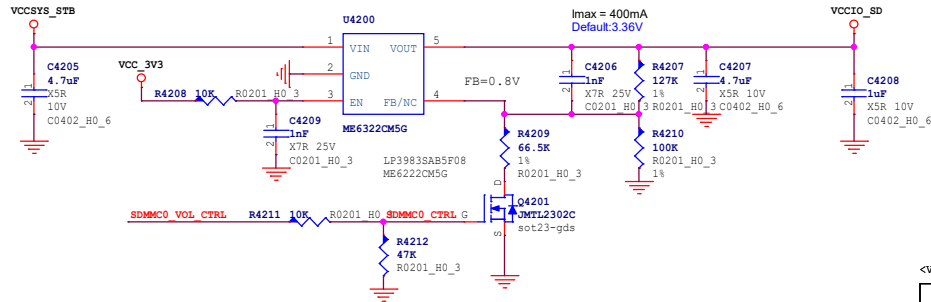

SDIO2.0 SDMMC0_VOL_CTRL=H VCCIO_SD=3.34V (Default)
SDIO3.0 SDMMC0_VOL_CTRL=L VCCIO_SD=1.816V

<Variant Name>

DDPAI 叮叮拍		叮叮拍(深圳)技术股份有限公司	
Project:		RV1126B_AOVT_E9	
File:		29.Flash-Micro-SD Card	
Date:	Wednesday, August 26, 2026	Size:	A4
Designed by:	LSL	Reviewed by:	Alt
Rev:	1.0	Sheet:	28 of 37


SPI Flash

NOTE:
Refer to the latest AVL
for parts selection.

Blank

<Variant Name>

DDPAI 叮叮拍		叮叮拍(深圳)技术股份有限公司				
Project:		RV1126B_AOVT_E9				
File:		30.Flash-SPI Flash				
Date:	Wednesday, August 26, 2026		Size:	A4	Rev:	1.0
Designed by:	LSL	Reviewed by:	All		Sheet:	29 of 37

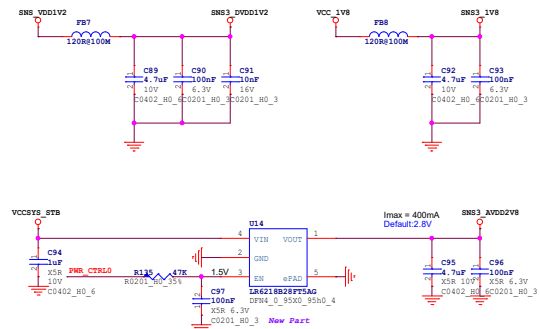







Project:	RV1126B_AOVT_E9				
File:	31.VI-Camera_MIPi-CSi0				
Date:	Monday, August 31, 2026	Size:	A3	Rev:	1.0
Designed by:	LSL	Reviewed by:	Ali	Sheet:	30 of 37

MIPI-DSI Interface


The diagram illustrates the MIPI-DSI interface between the processor and the camera module. The processor side (left) includes the MIPI DSI controller and the CSI DSI controller. The camera module side (right) includes the CSI DSI controller and the MIPI DSI controller. The connections are as follows:


- MIPI_DSI_D0P (Processor) to MIPI_DSI_D0N (Camera)
- MIPI_DSI_D1P (Processor) to MIPI_DSI_D1N (Camera)
- MIPI_DSI_D2P (Processor) to MIPI_DSI_D2N (Camera)
- MIPI_DSI_D3P (Processor) to MIPI_DSI_D3N (Camera)
- MIPI_DSI_CLKP (Processor) to MIPI_DSI_CLKN (Camera)
- CSI_DSI_CAM (Camera) to CSI_DSI_CAM (Processor)
- CSI_DSI_CAM (Camera) to CSI_DSI_CAM (Processor)

20260416

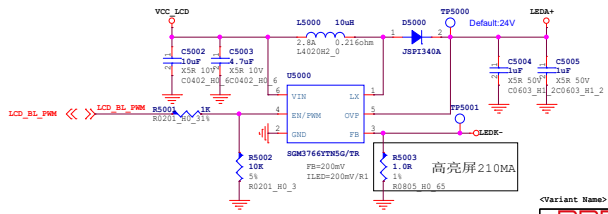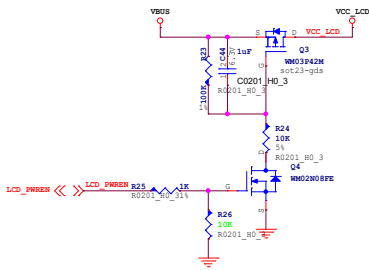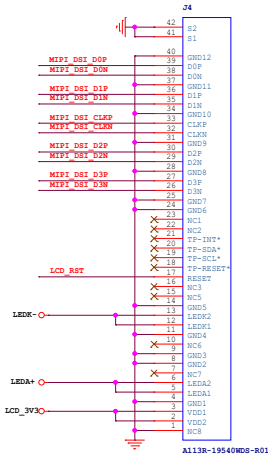
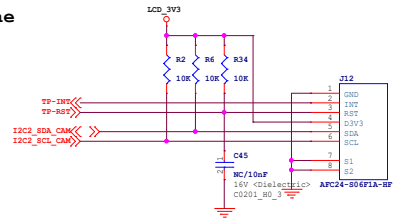


<Variant Name>					
DDPAI		町町拍(深圳)技术股份有限公司 町町拍			
Project:	RV1126B_AOVT_E9				
File:	32LCD_MIPI-DSI				
Date:	Wednesday, August 28, 2021		Size:	A3	Rev: 1.0
Designed by:	LGL	Reviewed by:	Al	Sheet	31 of 37

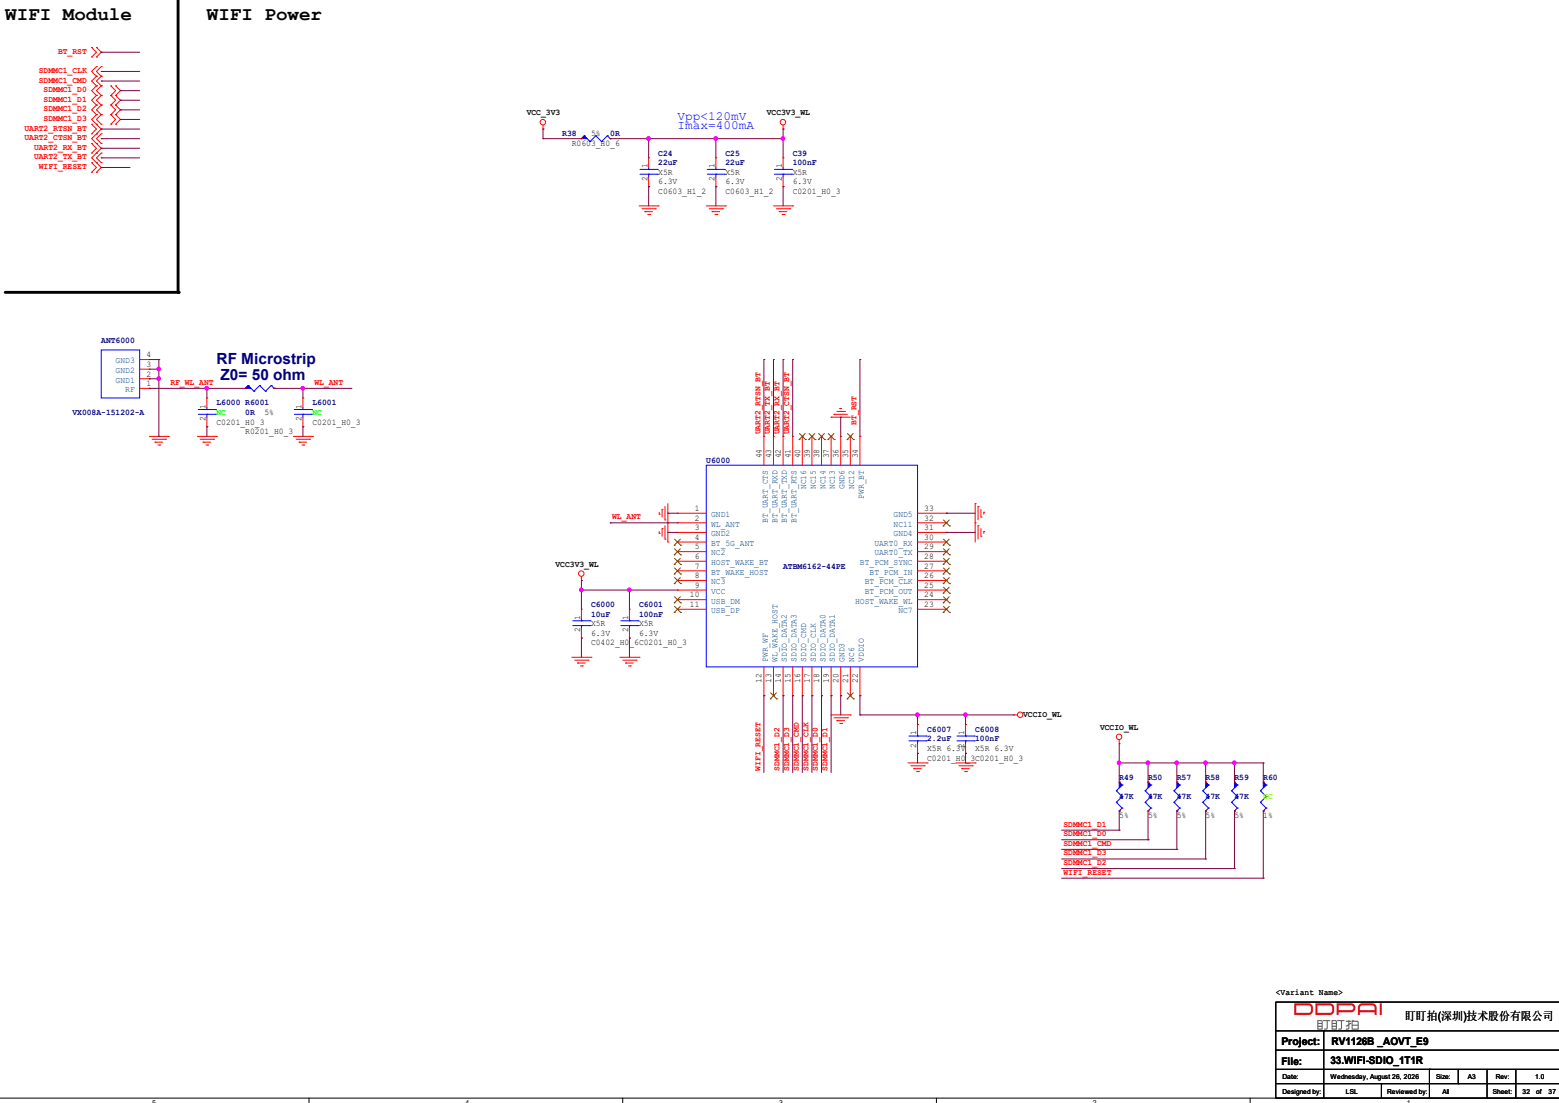


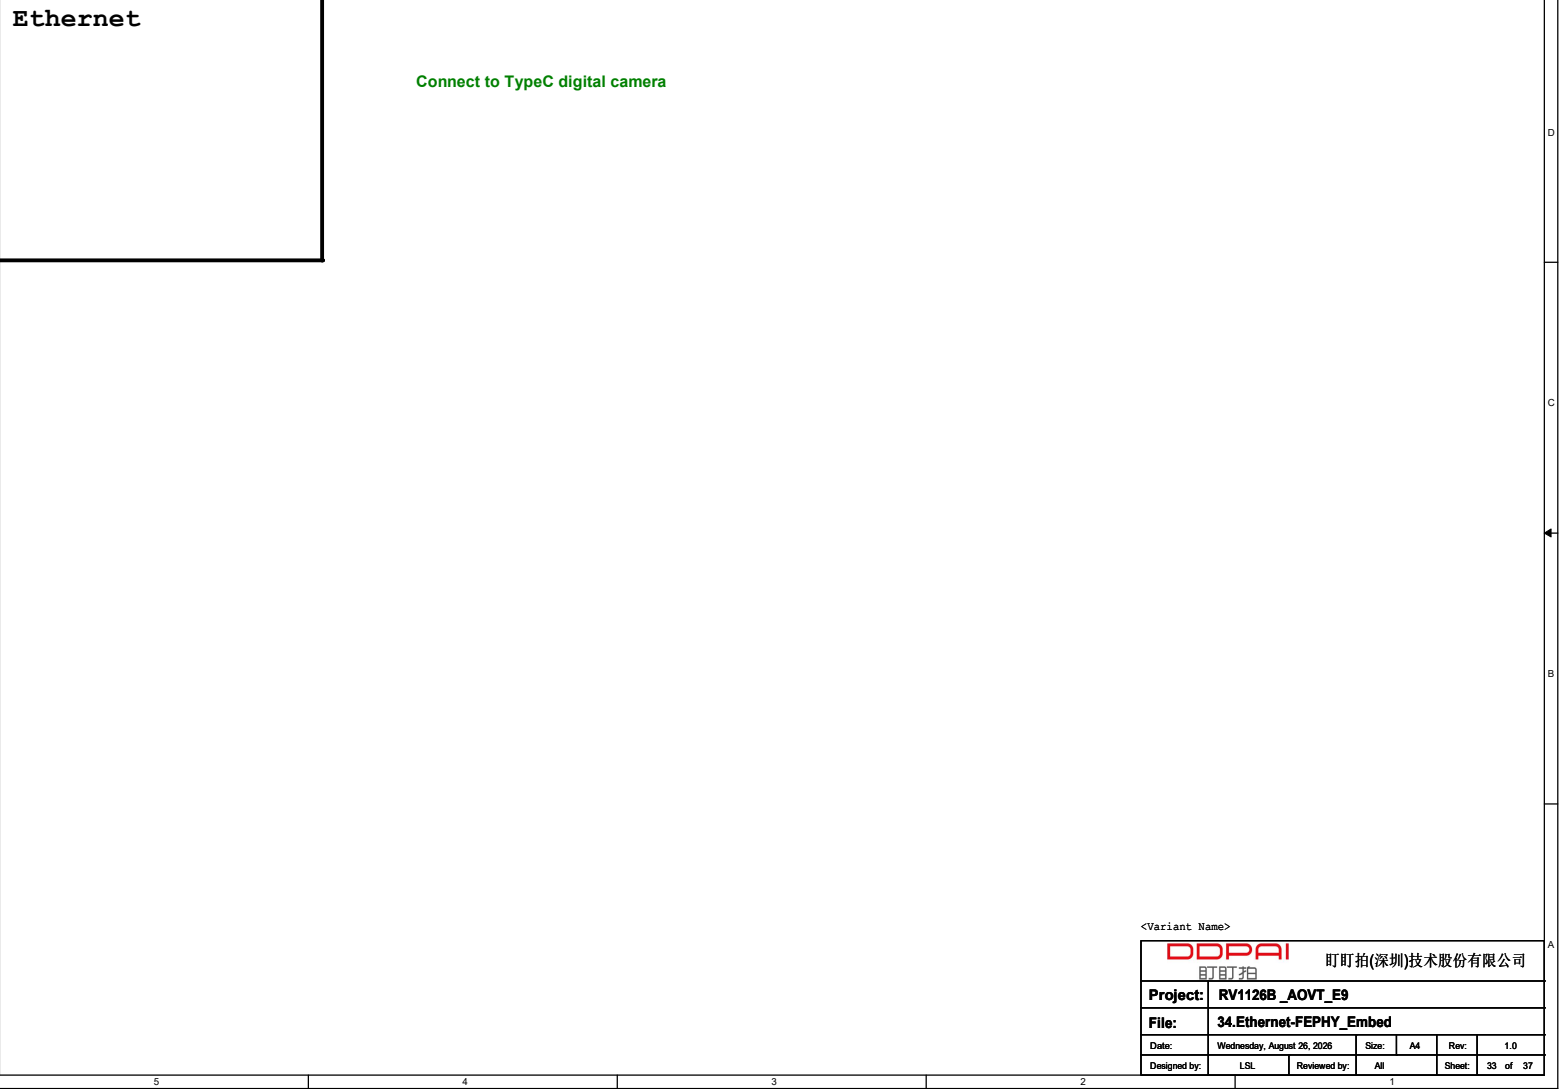




Audio Port

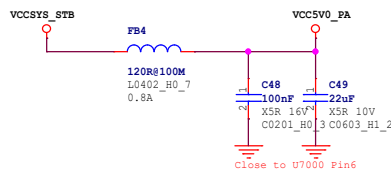



Audio DMIC IN

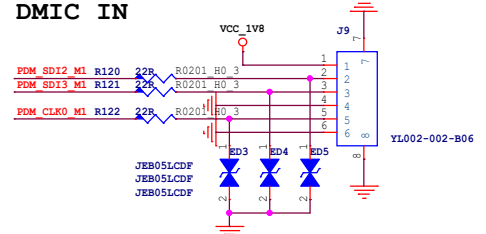

DSM OUT Filter

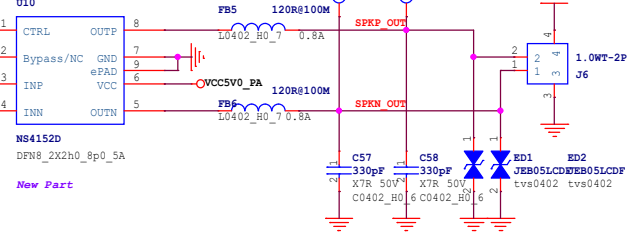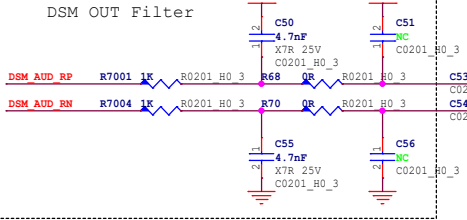


Audio ADC1-MIC IN

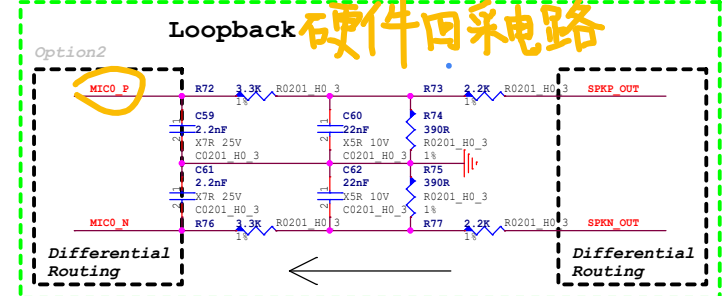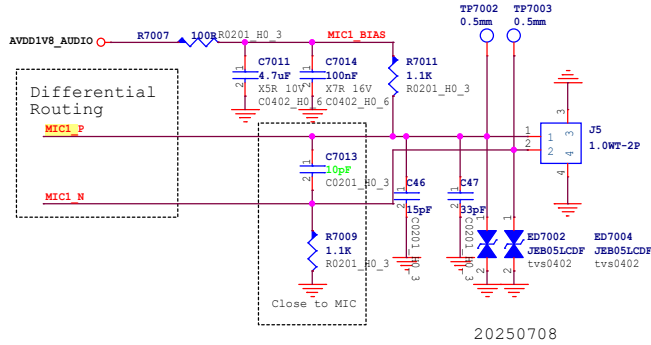


DDPAI		叮叮拍(深圳)技术股份有限公司			
叮叮拍					
Project:	RV1126B_AOVT_E9				
File:	35.Audio Port				
Date:	Wednesday, August 26, 2026		Size:	A4	Rev: 1.0
Designed by:	LSL	Reviewed by:	All		Sheet: 34 of 37

Key Array

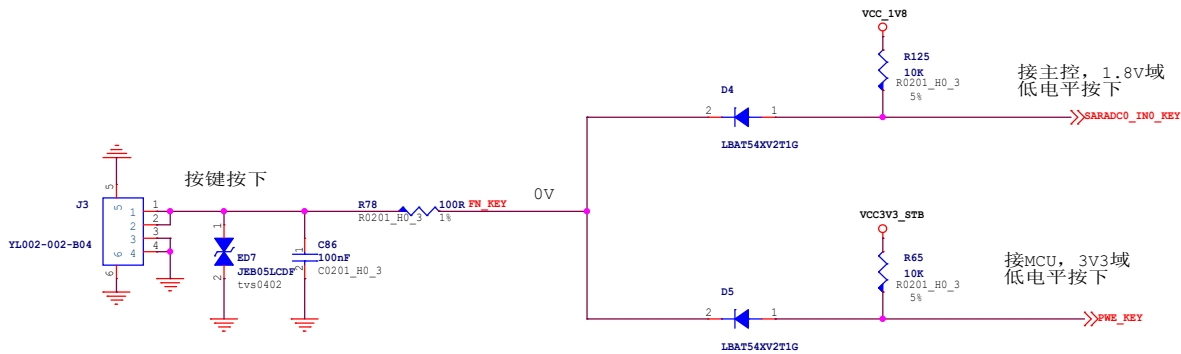

主控短按息屏/亮屏/长按关机

MCU休眠状态下短按开机/死机状态长按断电

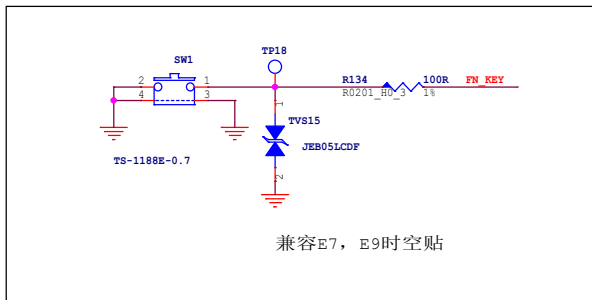


兼容E7, E9时空贴

<Variant Name>

DDPAI 叮叮拍		钉钉拍(深圳)技术股份有限公司	
Project:		RV1126B_AOVT_E9	
File:		36.Key Array	
Date:	Wednesday, August 26, 2026	Size:	A4
Designed by:	LSL	Reviewed by:	Alt
		Rev:	1.0
		Sheet:	35 of 37

UART0_RX_DBG <<
UART0_TX_DBG >>

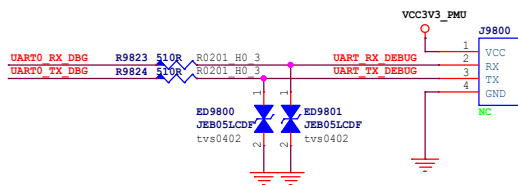

<Variant Name>

 叮叮拍(深圳)技术股份有限公司	
叮叮拍	
Project:	RV1126B_AOVT_E9
File:	37.UART Debug Port
Date:	Wednesday, 26 Feb, 2026
Size:	A4
Rev:	1.0
Designed by:	LSL
Reviewed by:	All
Sheet:	36 of 37

HOLE

MARK



CLIP



<Variant Name>						
DDPAI 钉钉拍		钉钉拍(深圳)技术股份有限公司				
Project:		RV1126B_AOVT_E9				
File:		38.Mark/Hole				
Date:	Wednesday, August 26, 2026			Size:	A4	Rev: 1.0
Designed by:	LSL	Reviewed by:	Ali	Sheet:	37 of 37	