


General

Rig Type:	Jackup
Rig Design:	Gusto MSC CJ 70 - 150 MC
Builder:	Hyundai Heavy Industries Ulsan, Korea
Year Built / Upgraded:	2003
Classification:	DNVA1 Self Elevating Drilling Unit DRILL (N), HELDK, CRANS, EO
Flag:	Danish
MODU Code:	1989

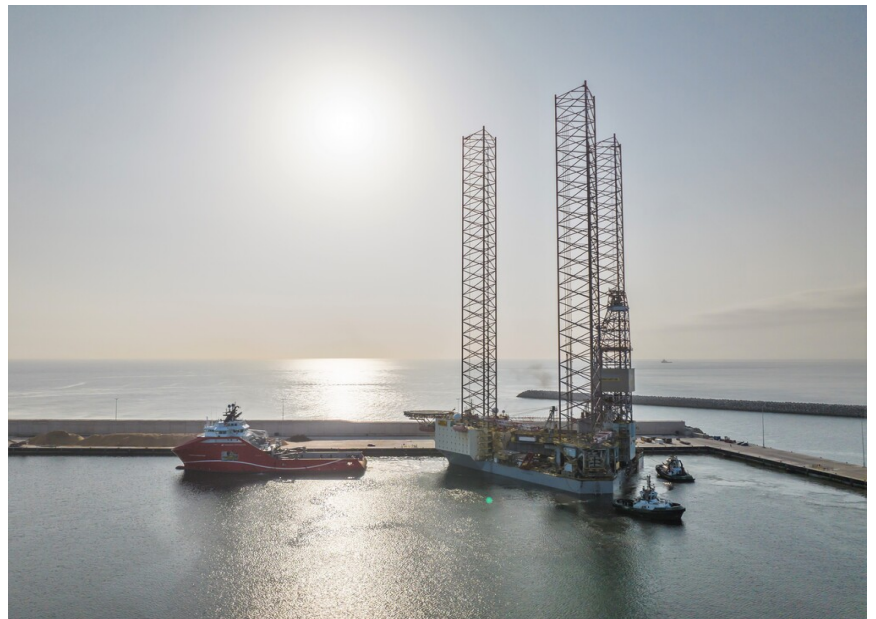

Ratings & Dimensions

Water Depth:	492 ft
Drilling Depth:	30,000 ft
Length:	291 ft
Breadth:	336 ft
Depth:	39,4 ft
Leg Length:	674 ft
Leg Spacing:	230 ft / 186 ft
Draft (Operating/ Transit):	15,7 ft transit
Cantilever Envelope:	100 ft x 65,6 ft (x-y skiddingsystem)
Variable Deck Load:	28,660 kips
Hook Load:	2,000 kips
Setback Capacity:	1,804 kips
Quarters Capacity:	120

Capacities

Fuel:	10,485 bbls
Drill Water:	20,885 bbls
Liquid Mud:	9,308 bbls
Brine Storage:	4,760 bbls
Base Oil Storage:	3,200 bbls
Bulk Storage:	15,890 cu ft
Sack Storage:	5,000 sacks

Equipment

Derrick:	NOV capacity 2,000 kips
Racking Capacity:	
Drawworks:	Varco AHS-10Q 4,600 HP
Top Drive:	Varco TDS-8SA; 63,000 ft-lbs continuous torque
Rotary:	Varco RST; 49-1/2 in
Iron Roughneck:	2 ea NOV AR-4500
BOP:	NOV Shaffer NXT 18 3/4" 15,000psi
LMRP:	N/A
Control System:	NOV 5000psi
Pipe Handling System:	2 ea Varco PRS6i rackers Varco Pipe Pick-up/lay-down (PTS 3) range 3 1/2"-20" consisting of: Pipe deck machine (PDM), Horizontal Transfer System (HTS)
Solids Control /System:	(6)3x Brandt VSM 300 + 3x MI Swaco MD3
Diverter:	Drillquip 500 (min 49 1/2" ID")
Cranes:	(3) Kenz EHC100/3500 (capacity 110kips@98')
Mud Pumps:	(3) Wirth 14"-2200Hp Triplex 7,500psi
Engines:	(4) 2,625kW ea
Jacking System:	National 700 electro-mechanical rack and pinion

These specifications are intended for informational purposes only. Noble makes no warranties about the accuracy or completeness of any information contained herein.

