
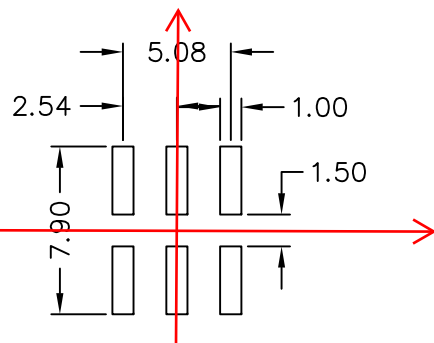


Front View

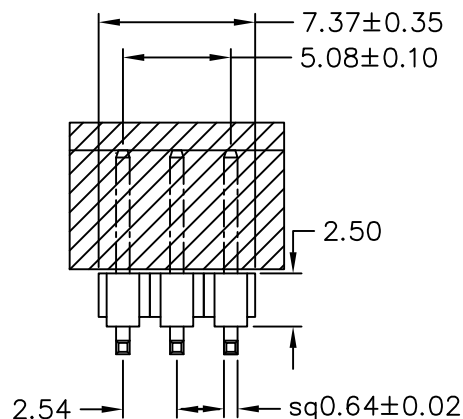


Top View

Recommended P.C.B Layout

Vendor: Pinrex
Vendor PN: 212-92-03SBEL

Side View

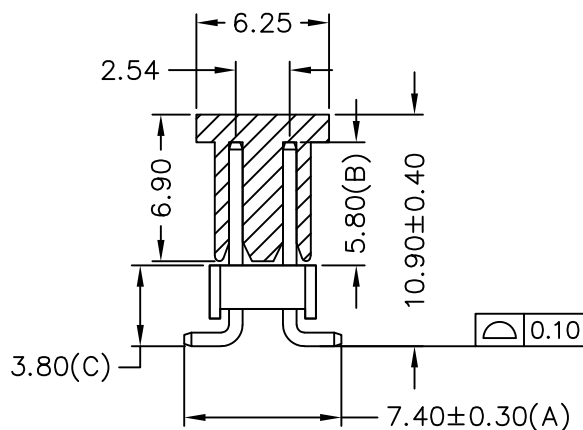

MATERIAL

Insulator: NY10T UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

Reflow Soldering condition: 260°C±5°C 3~5s

212-9 2- 03 S B EL
1 2 3 4 5 6

- 7: Green Product
- 9: Green Product High Temp
- 1: Single row
- 2: Dual rows
- No. of contacts per row
- S: Selective(Contact point: 30u"Gold plated;
Solder leg: 100u"Matte Tin plated;
50u"Min Nickel plated underlayer)
- B: Black Insulator
- Pinrex internal code.
- Packing: REEL



RoHS 2.0
