SINCE 2001

CABNIX

A Brand of Varudi Brass Products

"Engineered for Reliability. Built on Experience"

Precision Brass Cable Glands & Components for Industrial Applications

Backed by **23+ years** of brass manufacturing experience, **CABNIX** brings together established manufacturing expertise, precision machining and a customer-focused approach to deliver dependable cable entry solutions and brass components for industrial and electrical applications.

THE COMPANY

CABNIX is a specialized brand of **Varudi Brass Products**, a brass manufacturing business with a legacy dating back to **2003**. Based in Jamnagar, Gujarat, India, we specialize in the manufacturing and supply of brass cable glands, cable gland accessories and precision brass components for a wide range of industrial and electrical applications.

MANUFACTURING EXPERIENCE

With more than two decades of experience in brass manufacturing, we understand that reliable products begin with controlled manufacturing and attention to detail. Our approach combines established manufacturing practices with continuous improvement in processes, equipment and quality control. From raw material selection and machining to inspection, finishing and packing, we maintain a process-oriented approach to help ensure that products are manufactured according to the agreed specifications.

PRODUCT EXPERTISE

Our product portfolio includes armoured and unarmoured cable glands, double compression cable glands, PG and metric cable glands, A1/A2 cable gland, BW cable gland, CW cable gland, IP68 cable gland, Flange type cable gland, cable gland accessories and customized brass components. We focus on maintaining consistency in dimensions, threading, machining and finishing to meet the requirements of our customers.

QUALITY & RELIABILITY

From raw material selection and machining to inspection, finishing and packing, we follow a process-oriented approach focused on consistency and product conformity. Our objective is to provide dependable products and responsive service for every customer requirement.

LOOKING AHEAD

CABNIX is focused on building long-term relationships with customers in India and international markets by combining established brass manufacturing experience with a modern, customer-oriented approach.



info@cabnix.in www.cabnix.in



LIST OF CONTENTS

Page 001 Our Process
Page 002 Our Product Range
Page 003 IP68 Cable Glands
Page 004 Double Compression Weather Proof Cable Glands
Page 006 Double Compression Flame Proof Cable Glands
Page 008 Double Compression Unarmoured Weather Proof Cable Glands
Page 010 Single Compression Cable Glands
Page 011 Double Compression Cable Glands
Page 012 Flange Type Cable Glands
Page 013 BW Cable Gland
Page 014 CW Cable Gland
Page 015 E1FW Cable Gland
Page 016 A2F Flameproof Exd Cable Gland
Page 017 Cable Glands Accessories
Page 018 Brass Electric Components(for more details check cabnix.in)
Page 019 Brass Inserts(for more details check cabnix.in)

OUR PROCESS

01 — THE MAKING

Established manufacturing experience with controlled processes for consistent brass components and cable glands.





02 — HI-TECH MACHINING

Precision machining and threading focused on dimensional accuracy, consistency and efficient production.



03 — PERFECTION

Attention to workmanship, finishing and product consistency at every stage of manufacturing.



04 — QUALITY CONTROL

Inspection of dimensions, threads, material requirements, machining quality and finished products.



05 — PACKAGING & SHIPPING


Careful packing and product identification to support safe handling and reliable domestic or international dispatch.

OUR PRODUCT RANGE





BRASS CABLE GLANDS & ACCESSORIES

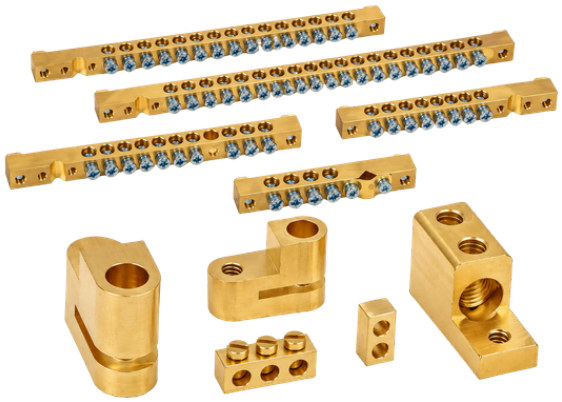


BRASS ELECTRIC COMPONENTS



BRASS INSERTS

IP68 Cable Glands

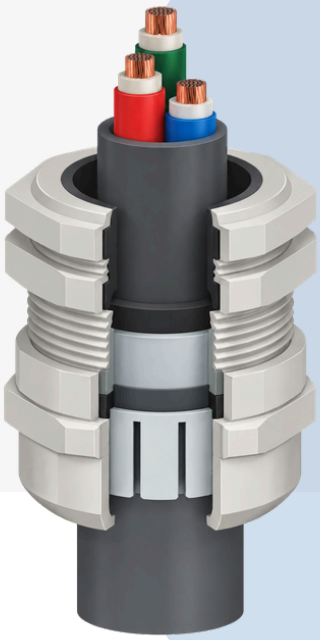

Technical Specifications:

Function	:	PG, Metric
Surface Finish	:	Nickel Plated Brass
Insert	:	Polymide PA6
Ingress	:	Maximum strain relief across the clamping range. Trapezoidal thread design for high-torque tightening and secure assembly.
Operating Temp.	:	-30°C to +100°C
Accessories	:	Lock Nut, Neoprene Washer, Polyamide Insert and Perbunan O Ring

Application:


Suitable for applications requiring IP68 protection against dust, liquids, water, strain, twisting and vibration. PG/Metric Cable Glands are commonly used with measuring and control instruments, machinery and industrial equipment.

They provide secure protection against movement, shaking and twisting, ensuring reliable cable entry and mechanical support.



Sr. No.	Type/Size	Clamping	Entry Thread	Wrench	Max Ass.
	PG/M	Range(mm)	Length(mm)	Size(mm)	Length
1	PG 7	02-6.5	5.00	14.00	23.00
2	PG 9	03-08	6.00	17.00	28.00
3	PG 11	04-10	6.00	20.00	29.00
4	PG 13.5	05-12	6.50	22.00	30.00
5	PG 16	08-14	6.50	24.00	31.00
6	PG 21	11-18	7.00	30.00	36.00
7	PG 29	16-25	8.00	40.00	41.00
8	PG 36	22-32	9.00	50.00	46.00
9	PG 42	28-38	10.00	57.00	52.00
10	PG 48	34-44	5.00	64.00	52.00
11	M 12	02-6.5	5.00	14.00	24.50
12	M 16	03-08	5.00	17.00	27.00
13	M 20	05-12	6.00	22.00	30.00
14	M 25	09-16	7.00	27.00	35.00
15	M 32	12-21	8.00	34.00	38.00
16	M 40	18-28	8.00	43.00	43.00
17	M 50	26-36	9.00	55.00	47.50
18	M 63	36-48	10.00	65.00	58.50
19	M 70	40-53	15.00	74.00	59.00
20	M75	48-63	15.00	79.00	59.00
21	M 80	53-68	15.00	85.00	62.00
22	M 90	60-75	20.00	95.00	70.00

Double Compression Weather Proof Cable Glands

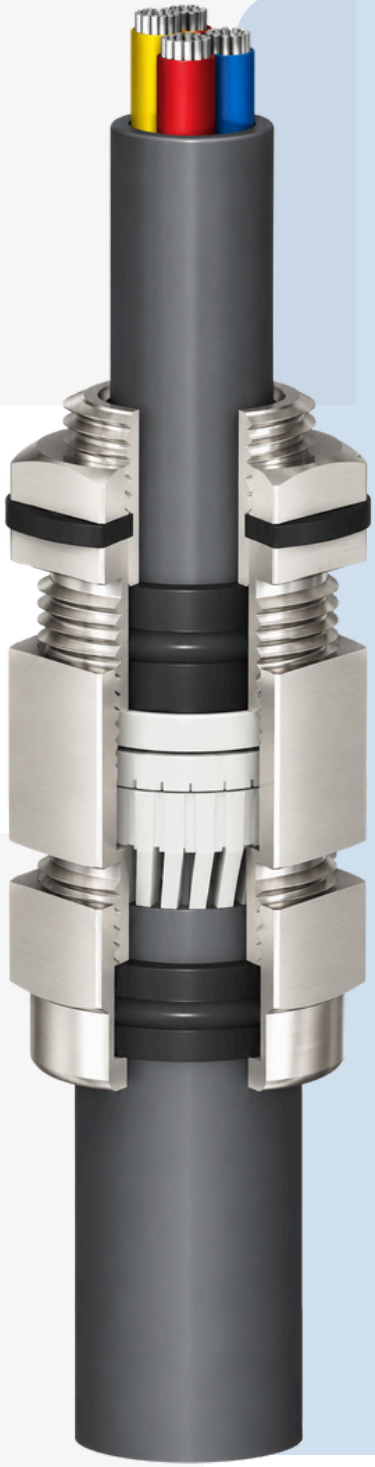

Technical Specifications:

Body Material	:	Brass (IS-319) Standard (Al. / S.S. / M.S. also available)
Surface Finish	:	Nickle Plated Standard (Chrome Natural Brass / Other finishes on request)
Entry Threads	:	BSC Standard (PG / Metric / NPT / BSP / also available)
Sealing Rubber Ring	:	Nitrile / Neoprene
Gland Standard	:	BS 6121
Ingress Protection	:	IP 66

Application:

Weather Proof Double Compression Glands are designed to provide weatherproof and dustproof protection with IP66 performance under normal climatic conditions. The use of suitable PVC shrouds provides additional protection where the glands are exposed to corrosive atmospheric conditions.

Accessories:

Compatible accessories can include PVC shrouds, adaptors, reducers,stopping plugs, etc. according to the selected gland and customer requirement.

Installation Sequence:

(a) Place Part No. 9, 8 & 7 over the cable outer sheath in the specified order before removing the sheath to expose the armour.


(b) After removing the required length of the outer sheath, position Part No. 6 over the exposed armour.

(c) Adjust the armour to the required length. Lift the armour and place Part No. 5 beneath it, keeping the tapered face towards the inner side. Secure Part No. 5 by pushing Part No. 6 firmly towards it.

(d) Position Part No. 4 & 3 over the inner sheath. Tighten Part No. 3 with Part No. 7, followed by tightening Part No. 9 with Part No. 7.


(e) Complete the gland assembly by fitting it into the enclosure entry thread provided. Where the enclosure does not have a threaded entry, secure the gland using the supplied Part No. 1.

Double Compression Weather Proof Cable Glands

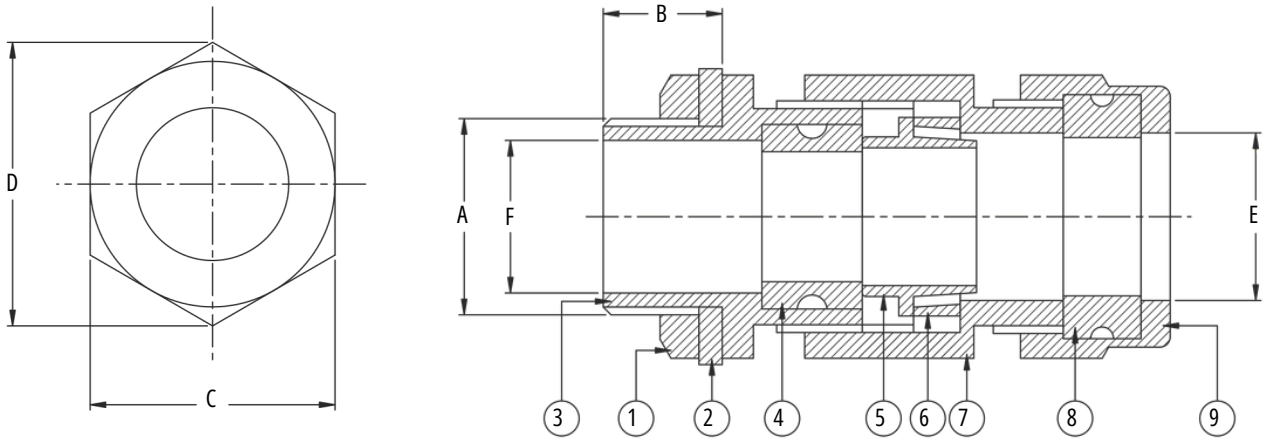

Suitable Cable Overall Dia		CABNIX Code	A Nipple Entry	B Length	C (A/F)	D (A/C)	E Dia.	F Dia.
From	To	CXW Series	Inches	mm	mm	mm	Ø mm	Ø mm
9.0	12.0	CXW 01SS	3/4"	15.0	22.0	25.0	16.0	14.0
12.0	16.5	CXW 01S	3/4"	15.0	25.0	29.0	17.5	14.5
16.5	18.5	CXW 01	3/4"	15.0	28.0	32.0	20.0	14.5
16.5	18.5	CXW 01A	1"	15.0	28.0	32.0	20.0	20.5
18.5	20.0	CXW 02	1"	15.0	29.5	33.0	21.0	19.0
18.5	20.0	CXW 02A	3/4"	15.0	29.5	33.0	21.0	15.0
20.0	23.0	CXW 03	1"	15.0	31.0	36.0	23.5	20.0
23.0	26.0	CXW 04	1"	15.0	36.0	41.0	27.0	20.0
23.0	26.0	CXW 04A	1.1/4"	15.0	36.0	41.0	27.0	26.0
26.0	30.0	CXW 05	1.1/4"	15.0	40.0	46.0	32.0	26.0
26.0	30.0	CXW 05A	1.1/2"	15.0	40.0	46.0	32.0	33.0
30.0	33.0	CXW 06	1.1/2"	15.0	46.0	52.5	35.0	31.0
30.0	33.0	CXW 06A	1.1/4"	15.0	46.0	52.5	35.0	27.0
33.0	37.0	CXW 07	1.1/2"	15.0	48.5	56.0	39.0	32.0
37.0	41.0	CXW 08	2"	15.0	55.5	64.0	44.0	43.5
41.0	46.0	CXW 09	2"	15.0	56.5	65.0	47.0	42.0
46.0	52.0	CXW 010	2"	20.0	65.0	75.0	54.0	45.0
46.0	52.0	CXW 010A	2.1/2"	20.0	66.0	76.0	54.0	55.0
52.0	54.0	CXW 011S	2.1/2"	20.0	71.0	82.0	61.0	56.0
54.0	61.0	CXW 011	2.1/2"	20.0	78.0	96.0	64.0	56.0
61.0	66.0	CXW 012	3"	20.0	84.0	96.0	67.0	64.0
66.0	72.0	CXW 013A	3"	20.0	90.0	103.0	76.0	68.0
72.0	78.0	CXW 013	3.1/4"	20.0	98.5	113.0	80.0	74.0
78.0	84.0	CXW 014	3.1/2"	20.0	102.0	117.0	90.0	78.0
84.0	94.0	CXW 015	4"	20.0	115.0	132.0	97.0	90.0
94.0	104.0	CXW 016	4.1/2"	20.0	126.0	145.0	106.0	102.0

Double Compression Flame Proof Cable Glands

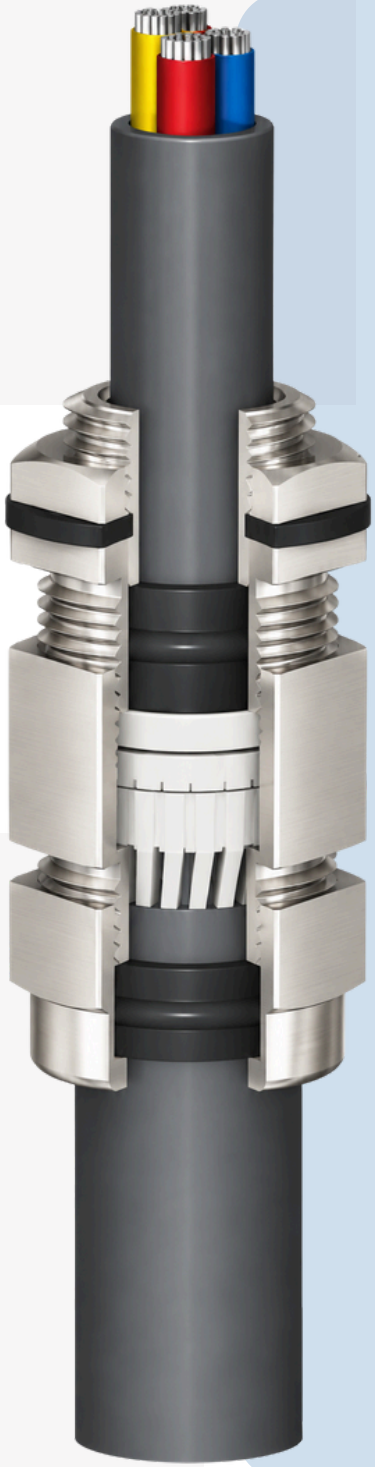

Technical Specifications:

Body Material	:	Brass (IS-319) Standard (Al. / S.S. / M.S. also available)
Surface Finish	:	Nickle Plated Standard (Chrome Natural Brass / Other finishes on request)
Entry Threads	:	BSC Standard (PG / Metric / NPT / BSP / also available)
Sealing Rubber Ring	:	Nitrile / Neoprene
Gland Standard	:	BS 6121
Ingress Protection	:	IP

Application:

Flame Proof Double Compression Glands are designed for cable entry applications in hazardous areas containing flammable gases or vapours as well as suitable normal industrial environments.

They provide weatherproof, water-resistant and dust-resistant protection up to IP66, where applicable to the specific product specification. The glands can also be used in hazardous climatic conditions where the required product specifications are met.

When fitted with suitable PVC shrouds, the glands can provide additional protection for applications exposed to corrosive atmospheric conditions.

Accessories:

Compatible accessories can include PVC shrouds, adaptors, reducers,stopping plugs, etc. according to the selected gland and customer requirement.

Installation Sequence:

(a) Place Part No. 9, 8 & 7 over the cable outer sheath in the specified order before removing the sheath to expose the armour.


(b) After removing the required length of the outer sheath, position Part No. 6 over the exposed armour.

(c) Adjust the armour to the required length. Lift the armour and place Part No. 5 beneath it, keeping the tapered face towards the inner side. Secure Part No. 5 by pushing Part No. 6 firmly towards it.

(d) Position Part No. 4 & 3 over the inner sheath. Tighten Part No. 3 with Part No. 7, followed by tightening Part No. 9 with Part No. 7.

(e) Complete the gland assembly by fitting it into the enclosure entry thread provided. Where the enclosure does not have a threaded entry, secure the gland using the supplied Part No. 1.

Double Compression Flame Proof Cable Glands

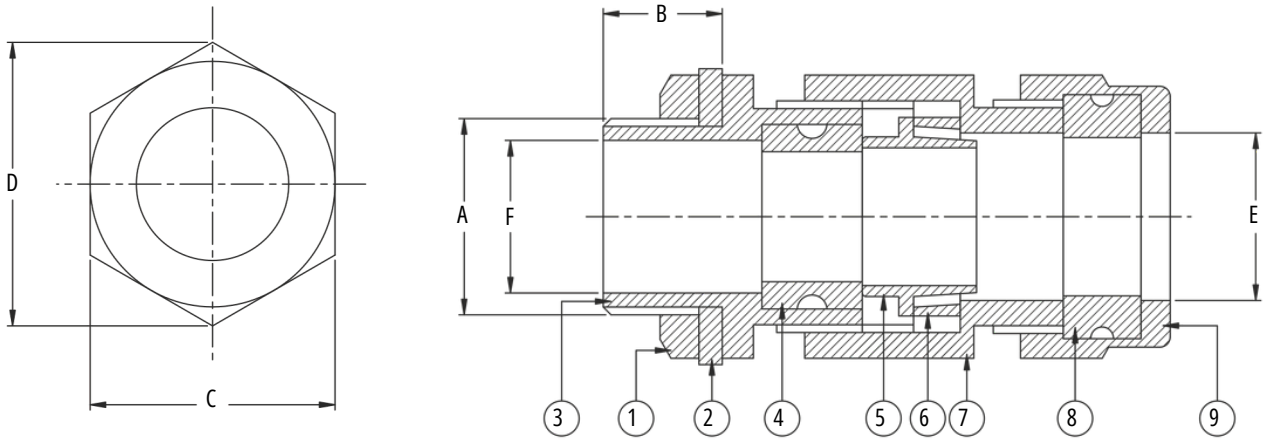

Suitable Cable Overall Dia		CABNIX Code	A Nipple Entry	B Length	C (A/F)	D (A/C)	E Dia.	F Dia.
From	To	CXF Series	Inches	mm	mm	mm	Ø mm	Ø mm
9.0	12.0	CXF 01SS	3/4"	25.0	22.0	25.0	16.0	14.0
12.0	16.5	CXF 01S	3/4"	25.0	25.0	29.0	17.5	14.5
16.5	18.5	CXF 01	3/4"	25.0	28.0	32.0	20.0	14.5
16.5	18.5	CXF 01A	1"	25.0	28.0	32.0	20.0	20.5
18.5	20.0	CXF 02	1"	25.0	29.5	33.0	21.0	19.0
18.5	20.0	CXF 02A	3/4"	25.0	29.5	33.0	21.0	15.0
20.0	23.0	CXF 03	1"	25.0	31.0	36.0	23.5	20.0
23.0	26.0	CXF 04	1"	25.0	36.0	41.0	27.0	20.0
23.0	26.0	CXF 04A	1.1/4"	25.0	36.0	41.0	27.0	26.0
26.0	30.0	CXF 05	1.1/4"	25.0	40.0	46.0	32.0	26.0
26.0	30.0	CXF 05A	1.1/2"	25.0	40.0	46.0	32.0	33.0
30.0	33.0	CXF 06	1.1/2"	25.0	46.0	52.5	35.0	31.0
30.0	33.0	CXF 06A	1.1/4"	25.0	46.0	52.5	35.0	27.0
33.0	37.0	CXF 07	1.1/2"	25.0	48.5	56.0	39.0	32.0
37.0	41.0	CXF 08	2"	25.0	55.5	64.0	44.0	43.5
41.0	46.0	CXF 09	2"	25.0	56.5	65.0	47.0	42.0
46.0	52.0	CXF 010	2"	25.0	65.0	75.0	54.0	45.0
46.0	52.0	CXF 010A	2.1/2"	25.0	66.0	76.0	54.0	55.0
52.0	54.0	CXF 011S	2.1/2"	25.0	71.0	82.0	61.0	56.0
54.0	61.0	CXF 011	2.1/2"	25.0	78.0	96.0	64.0	56.0
61.0	66.0	CXF 012	3"	25.0	84.0	96.0	67.0	64.0
66.0	72.0	CXF 013A	3"	25.0	90.0	103.0	76.0	68.0
72.0	78.0	CXF 013	3.1/4"	25.0	98.5	113.0	80.0	74.0
78.0	84.0	CXF 014	3.1/2"	25.0	102.0	117.0	90.0	78.0
84.0	94.0	CXF 015	4"	25.0	115.0	132.0	97.0	90.0
94.0	104.0	CXF 016	4.1/2"	25.0	126.0	145.0	106.0	102.0

Double Compression Unarmoured Weather Proof Cable Glands



Technical Specifications:

Body Material	:	Brass (IS-319) Standard (Al. / S.S. / M.S. also available)
Surface Finish	:	Nickle Plated Standard (Chrome Natural Brass / Other finishes on request)
Entry Threads	:	BSC Standard (PG / Metric / NPT / BSP / also available)
Sealing Rubber Ring	:	Nitrile / Neoprene
Gland Standard	:	BS 6121
Ingress Protection	:	IP 66

Application:

Weatherproof Double Compression Glands are designed to provide weatherproof and dustproof protection up to IP66, making them suitable for use under normal climatic conditions. When fitted with suitable PVC shrouds, they can also provide additional protection for applications exposed to corrosive atmospheric conditions.

Accessories:

Compatible accessories can include PVC shrouds, adaptors, reducers,stopping plugs, etc. according to the selected gland and customer requirement.

Installation Sequence:


(a) Pass Items 7, 6, 5, 4 & 3 over the cable in the specified order.


(b) Engage Items 5 & 3 together and tighten securely.

(c) Position Items 7 & 5 correctly and tighten the assembly.

(d) Screw Items 3 & 2 into the apparatus entry. For a plain-hole entry, secure the assembly using Item 1.


Double Compression Unarmoured Weather Proof Cable Glands

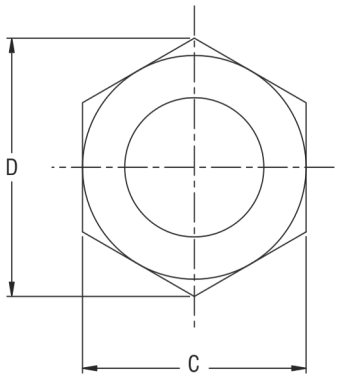

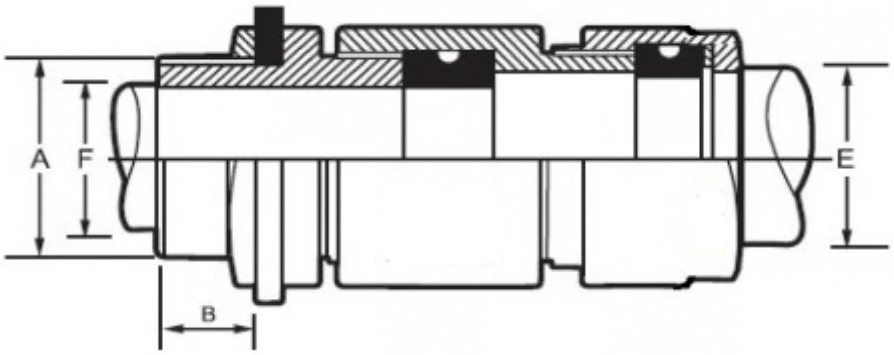

Suitable Cable Overall Dia		CABNIX Code	A Nipple Entry	B Length	C (A/F)	D (A/C)	E Dia.	F Dia.
From	To	CXW Series	Inches	mm	mm	mm	Ø mm	Ø mm
9.0	13.0	CXW 01SS UN	3/4"	15.0	21.0	24.0	13.0	13.0
13.0	14.5	CXW 01S UN	3/4"	15.0	25.0	29.0	14.5	14.5
14.5	18.0	CXW 01A UN	1"	15.0	28.0	32.0	18.0	18.0
18.0	20.0	CXW 02 UN	1"	15.0	31.5	36.5	20.0	20.0
20.0	23.0	CXW 03SP UN	M28	15.0	32.0	37.0	23.0	23.0
23.0	26.0	CXW 04A UN	1.1/4"	15.0	38.0	44.0	26.0	26.0
26.0	30.0	CXW 05A UN	1.1/2"	15.0	41.0	47.0	30.0	30.0
30.0	33.0	CXW 06SP UN	M40	15.0	47.0	54.0	33.0	33.0
33.0	36.0	CXW 07SP UN	M42	15.0	52.0	58.0	36.0	36.0
36.0	41.0	CXW 08 UN	2"	15.0	56.0	64.0	41.0	41.0
41.0	44.0	CXW 09 UN	2"	15.0	59.0	67.0	46.0	46.0
44.0	52.0	CXW 010A UN	2"	20.0	66.5	77.0	52.0	52.0
52.0	60.0	CXW 011SP UN	M70	20.0	80.0	92.0	60.0	60.0
60.0	66.0	CXW 012 UN	3"	20.0	85.0	97.0	66.0	66.0
66.0	72.0	CXW 013 UN	3.1/4"	20.0	90.0	103.0	72.0	72.0
72.0	80.0	CXW 014 UN	3.1/2"	20.0	105.0	122.0	80.0	80.0
80.0	90.0	CXW 015 UN	4"	20.0	117.0	135.0	90.0	90.0

Single Compression Cable Glands

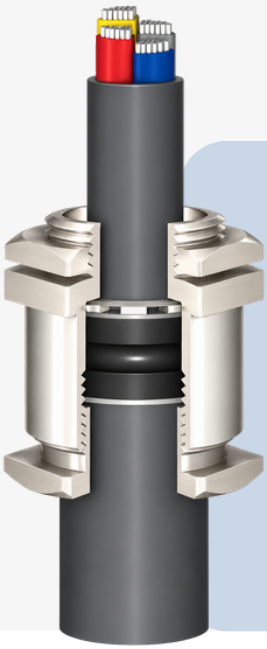


Technical Specifications:

Body Material	:	Brass
Surface Finish	:	Nickle Plated Standard
Entry Threads	:	BSC Standard (Metric also available)
Sealing Rubber Ring	:	Natural


Application:

Suitable for armoured and unarmoured cable applications in normal climatic conditions.

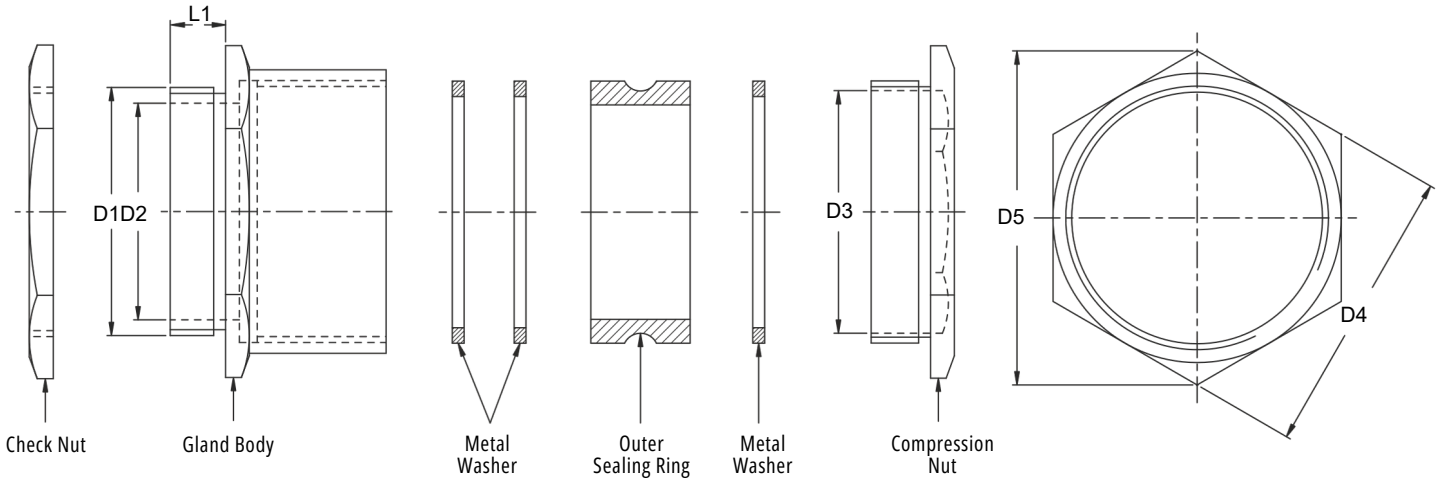

Suitable Cable Overall Dia		Size		D1 Nipple Entry	D2 Dia.	D3 Dia.	D4 (A/F)	D5 (A/C)	L1 Length
From	To	mm	Inches	Inches	Ø mm	Ø mm	mm	mm	mm
6.0	9.0	10	3/8"	5/8"	12.5	12.7	18.0	20.5	7.0
9.0	12.0	12	1/2"	5/8"	12.0	15.0	20.5	23.5	7.0
12.0	14.0	16	5/8"	3/4"	15.0	15.0	20.5	23.5	7.0*
14.0	16.0	19	3/4"	3/4"	15.5	18.0	22.5	26.0	7.0*
16.0	18.0	22	7/8"	3/4"	15.5	20.0	25.5	29.0	7.0*
18.0	21.5	25	1"	1"	21.5	23.5	28.5	32.5	8.0*
21.5	26.0	28	1 1/8"	1 1/8"	25.0	27.5	33.5	38.0	8.5*
26.0	31.0	32	1 1/4"	1 1/4"	27.5	31.0	35.5	40.5	10.0*
31.0	34.0	35	1 3/8"	1 3/8"	30.0	35.5	40.5	47.0	10.0*
34.0	38.0	38	1 1/2"	1 1/2"	33.5	38.0	45.0	52.0	10.0*
38.0	42.0	45	1 3/4"	1 3/4"	39.5	44.0	50.5	58.5	11.0*
42.0	48.0	50	2"	2"	45.5	51.5	58.0	66.5	11.0*
48.0	54.0	57	2 1/4"	2 1/4"	52.5	57.0	64.0	74.0	11.0
54.0	60.0	63	2 1/2"	2 1/2"	58.0	63.0	70.0	80.0	13.0
60.0	66.0	70	2 3/4"	2 3/4"	62.0	70.0	78.0	89.0	13.0
66.0	72.0	75	3"	3"	74.0	70.0	83.5	96.5	13.5
72.0	78.0	82	3 1/4"	3 1/4"	75.5	81.0	90.0	103.5	14.0
78.0	84.0	88	3 1/2"	3 1/2"	77.5	84.0	94.5	109.5	15.0
84.0	92.0	100	4	4"	92.5	100.0	110.0	127.0	15.0

Double Compression Cable Glands

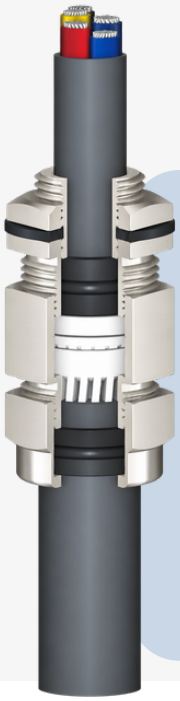



Technical Specifications:

Body Material	:	Brass
Surface Finish	:	Nickle Plated Standard
Entry Threads	:	BSC Standard (Metric also available)
Sealing Rubber Ring	:	Natural

Application:


Suitable for armoured and unarmoured cable applications in normal climatic conditions.

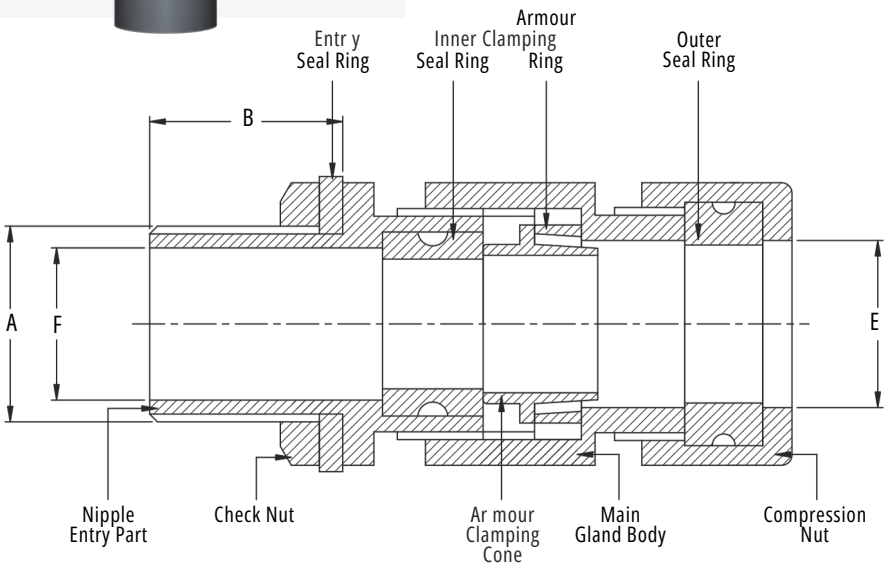

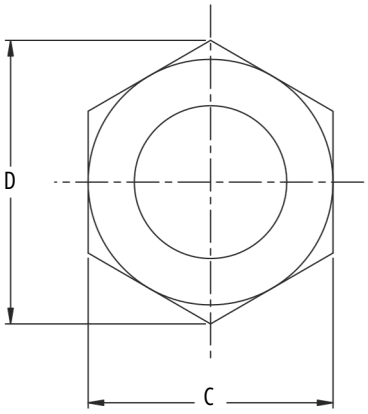

Suitable Cable Overall Dia		Size		A Nipple Entry	B Length	C (A/F)	D (A/C)	E Dia.	F Dia.
From	To	mm	Inches	Inches	mm	mm	mm	Ø mm	Ø mm
6.0	9.0	10	3/8"	5/8"	25.0	20.5	23.5	10.0	7.0
9.0	12.0	12	1/2"	5/8"	25.0	22.5	26.0	16.5	11.0
12.0	16.0	16	5/8"	3/4"	25.0	22.5	26.0	16.5	14.0
16.0	18.0	19	3/4"	3/4"	25.0	25.5	29.5	19.0	15.0
18.0	20.0	22	7/8"	3/4"	25.0	28.0	32.0	20.0	15.0
18.0	23.0	25	1"	1"	25.0	31.0	35.5	23.5	20.0
21.5	26.0	28	1 1/8"	1 1/8"	25.0	35.5	41.0	27.0	23.0
26.0	30.0	32	1 1/4"	1 1/4"	25.0	41.0	47.0	32.0	25.5
30.0	33.0	35	1 3/8"	1 3/8"	25.0	44.0	50.5	35.0	30.0
33.0	37.0	38	1 1/2"	1 1/2"	25.0	47.0	54.0	38.0	31.5
37.0	43.0	45	1 3/4"	2"	25.0	57.0	65.5	47.0	43.0
43.0	48.0	50	2"	2"	25.0	59.0	68.0	51.0	43.0
48.0	54.0	57	2 1/4"	2 1/4"	25.0	66.0	75.0	57.0	50.0
54.0	61.0	63	2 1/2"	2 1/2"	25.0	77.0	89.0	65.0	57.0
61.0	67.0	70	2 3/4"	2 3/4"	25.0	82.0	95.0	72.0	63.0
67.0	73.0	75	3"	3"	25.0	90.0	105.0	75.0	65.0
73.0	78.0	82	3 1/4"	3 1/4"	25.0	94.0	108.0	83.0	74.5
78.0	84.0	88	3 1/2"	3 1/2"	25.0	103.0	119.0	91.0	79.0
84.0	94.0	100	4	4"	25.0	113.0	130.0	98.0	91.0

Flange Type Cable Glands

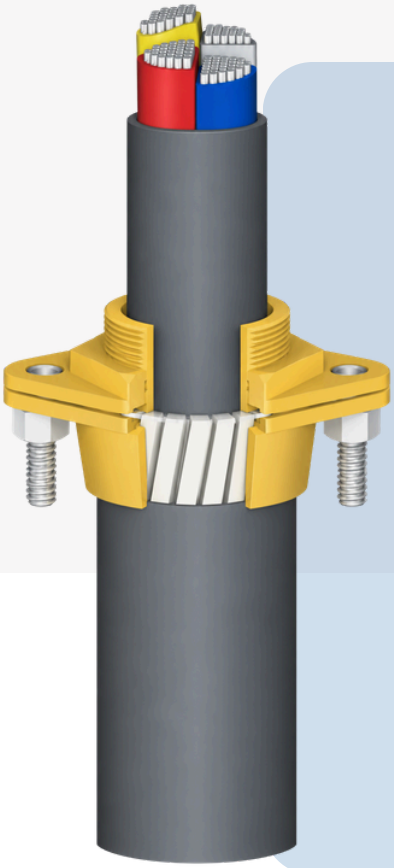

Technical Specifications:

Body Material	:	Brass
Surface Finish	:	Brass
Entry Threads	:	BSC / ET

Application:


Generally suitable for armoured cables and outdoor installations.


Description:

Flange Type Cable Glands are manufactured from brass castings and accurately machined to the required dimensions. Designed primarily for armoured cable applications, these mechanical glands are suitable for outdoor installations.

The gland consists of an oval-shaped brass flange body and clamping plate, secured with galvanised mild steel studs and nuts to provide firm clamping of the cable armour. A tapered cone and nut are provided for secure cable termination.


The tapered design of the cone and body provides a firm and reliable grip on the cable armour, ensuring secure mechanical termination.

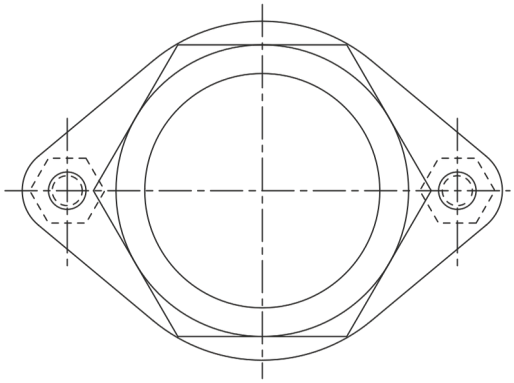

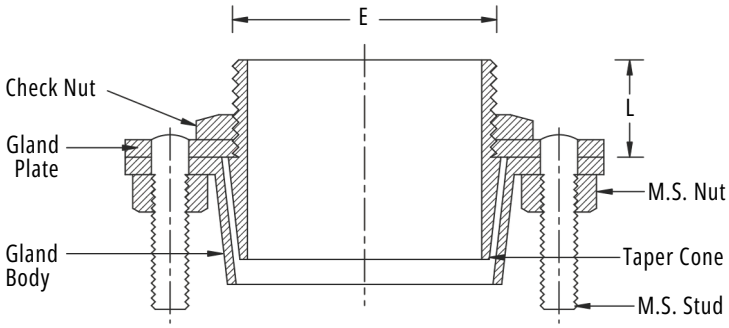

Suitable Cable Overall Dia		CABNIX Code	E Dia.	L Length
From	To	CXFL Series	Ø mm	mm
12.0	16.5	CXFL 5	15.0	13.0
15.0	19.0	CXFL 4	19.0	13.0
18.5	20.5	CXFL 3	19.5	13.0
20.5	24.5	CXFL 2	25.0	16.5
24.0	30.0	CXFL 1	31.0	15.5
29.5	34.0	CXFL 11	31.0	15.0
32.5	35.0	CXFL 0	37.5	21.0
34.5	38.0	CXFL 00	37.5	20.0
37.0	42.0	CXFL 38	42.0	21.5
40.5	44.0	CXFL 001	49.0	20.5
43.5	52.0	CXFL 002	53.5	21.5
51.0	58.0	CXFL 003	60.0	23.0
56.5	67.0	CXFL 0033	65.0	25.5
66.0	76.0	CXFL 004	75.0	22.5
75.0	83.0	CXFL 005	99.0	22.5

BW Cable Gland

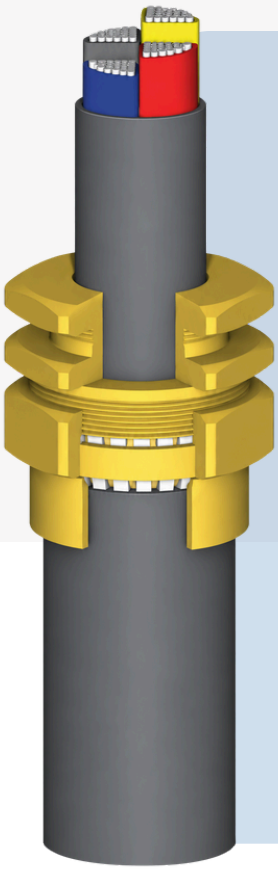

Technical Specifications:

Material	:	Brass BS 2874
Thread	:	Metric, NPT
Cable Type	:	SWA Cable
Operating Temp.	:	-80°C to +300°C
Accessories	:	Shroud,Earth Tag,Galvanized Steel,Lock Nut and Serrated Washer

Application:


Provides mechanical cable retention and electrical continuity through secure termination of the cable armour, making it suitable for indoor applications. The gland is designed for easy and efficient installation.



Size	Thread "C"		Thread Length	Cable Dia.	Cable Dia.	Armour Wire Dia.	Across Flat	Across Corners	CABNIX Code
	Metric	NPT	"D"	"A" Max.	"B" Max.				
20S	20	1/2"	10	11.5	15.5	0.90-1.25	21.25	23.25	CXBW20S
20	20	1/2"	10	14	20	1.25-1.60	23.85	27.25	CXBW20
25	25	1"	10	20.5	26	1.60-2.00	34	37	CXBW25
32	32	1"	15	27	33.9	1.60-2.00	40.5	45.5	CXBW32
40	40	1½"	15	33	41.5	2.00-2.50	48	54.5	CXBW40
50S	50	2"	15	38.5	47	2.00-2.50	55	60	CXBW50S
50	50	2"	15	44	52	2.50	63	71	CXBW50
63S	63	2"	15	51	59.2	2.50	70.5	75.5	CXBW63S
63	63	2½"	15	56.8	65.5	2.50	75	84.5	CXBW63
75S	75	2½"	15	63	74	2.50-3.15	85	90	CXBW75S
75	75	3"	15	68.5	79.5	3.15	92.25	102.5	CXBW75
82	82	3"	15	74.3	84.4	3.15	95	105	CXBW82
90	90	3"	15	82	91	3.15	99	110	CXBW90

Tolerance: ±1 mm

CW Cable Gland

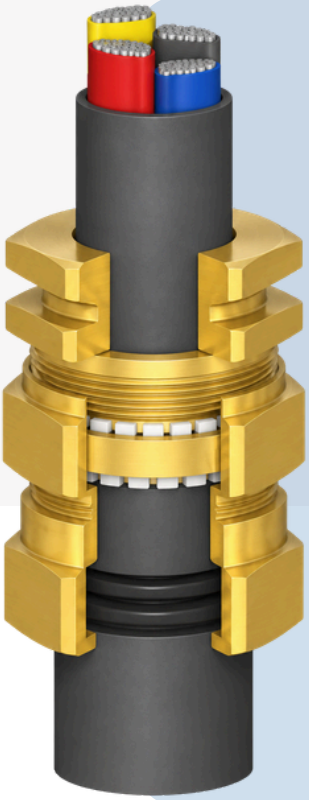

Technical Specifications:

Material	:	Brass BS 2874
Thread	:	Metric, NPT
Cable Type	:	SWA Cable
Operating Temp.	:	-60°C to +130°C
Features	:	Universal anyway clamping ring
Accessories	:	PVC Shroud,Earth Tag,Lock Nut,Serrated Washer and Entry Thread Sea

Application:


Provides a mechanical seal on the SWA cable outer sheath, while also providing mechanical cable retention and electrical continuity through secure termination of the cable armour. Suitable for both indoor and outdoor applications.



Size	Thread "C"		Thread Length	Cable Dia.	Cable Dia. "B"		Armour Wire Dia.	Across Flat	Across Corners	CABNIX Code
	Metric	NPT	"D"	"A" Max.	Min.	Max.				
16	16	-	10	8.6	6.1	12	0.90	20	23	CXCW16
20S	20	1/2"	10	11.8	9.5	16.2	0.90-1.25	24	27	CXCW20S
20	20	1/2"	10	14	13	20.25	0.90-1.25	27.7	31	CXCW20
25	25	3/4"	10	20.3	18	26	1.20-1.60	35	39	CXCW25
32	32	1¼"	10	26.5	23	33.7	1.60-2.00	43	47.5	CXCW32
40	40	1½"	13	33.2	28	40.1	1.60-2.00	51.5	57	CXCW40
50S	50	2"	13	40	34.5	45.75	2.00-2.50	58.5	65	CXCW50S
50	50	2"	13	44	39.6	53.1	2.00-2.50	66	73	CXCW50
63S	63	2½"	14	50	44	59.4	2.50	72	80	CXCW63S
63	63	2½"	14	56	54.5	65	2.50	80	89	CXCW63
75S	75	3"	15	62	59	71.4	2.50	86.5	97	CXCW75S
75	75	3"	15	69.5	66.7	78	2.50	94	105	CXCW75
90	90	3½"	20	80	76.2	89.25	2.50-3.15	106	118.7	CXCW90
100	100	-	20	91	86	102	3.15-4.00	123	133	CXCW100
110	110	-	20	100	101	110.5	3.15-4.00	134	144	CXCW110
115	115	-	20	102	101.5	110.5	3.15-4.00	134	144	CXCW115

Tolerance: ±1 mm

E1FW Cable Gland

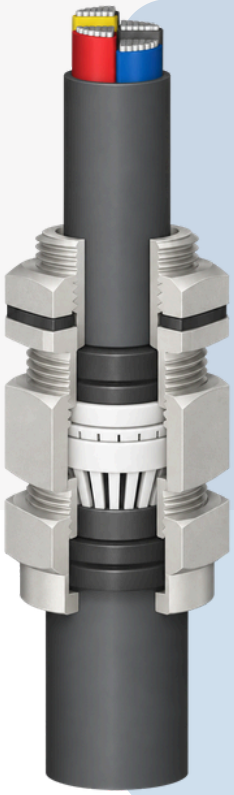

Technical Specifications:

Material	:	Brass BS 2874 and also available in Nickle Plated Brass
Thread	:	Metric, NPT and PG
Cable Type	:	Steel Wire(SWA) Cable
Operating Temp.	:	-60°C to +130°C
Features	:	Displacement seal and Two part Armour Lock
Accessories	:	Shroud,Earth Tag,Lock Nut, Serrated Washer, Entry Thread Seal,adapter and reducer

Application:

Provides a flameproof seal on the inner sheath and an environmental seal on the outer sheath of various types of armoured cables, suitable for indoor and outdoor applications in hazardous areas including Zone 1, Zone 2 and Zone 22.


It also provides mechanical cable retention and electrical continuity through secure termination of the cable armour.



Size	Thread "C"		Thread Length "D"	Cable Range Dia.		Cable Dia. B		Armour Wire Dia.	Across Flat	CABNIX Code
	Metric	NPT		Min.	Max.	Min.	Max.			
16	16	-	15.00	3.10	8.60	6.10	12.00	0.90	24.50	CXE1FW16
20S	20	1/2"	15.00	6.10	11.60	9.50	16.20	0.90-1.25	24.50	CXE1FW20S
20	20	1/2"	15.00	6.50	13.90	13.00	20.25	0.90-1.25	28.00	CXE1FW20
25	25	3/4"	15.00	11.10	19.90	18.00	26.00	1.25-1.60	38.00	CXE1FW25
32	32	1"	15.00	17.00	26.15	23.00	33.70	1.60-2.00	46.00	CXE1FW32
40	40	1¼"	15.00	22.00	32.10	28.00	40.10	1.60-2.00	54.00	CXE1FW40
50S	50	1½"	15.00	29.80	38.10	34.50	45.75	2.00-2.50	61.50	CXE1FW50S
50	50	2"	15.00	36.90	43.30	39.60	53.10	2.00-2.50	70.00	CXE1FW50
63S	63	2"	15.00	42.20	49.90	44.00	59.40	2.00-2.50	76.00	CXE1FW63S
63	63	2½"	15.00	48.30	54.90	54.50	65.00	2.00-2.50	80.00	CXE1FW63
75S	75	2½"	15.00	54.20	62.00	59.00	71.40	2.00-2.50	89.00	CXE1FW75S
75	75	3"	15.00	59.80	66.90	66.70	78.00	2.50-3.00	98.50	CXE1FW75
90	90	3"	18.00	66.60	79.30	76.20	89.25	3.00-3.50	113.00	CXE1FW90
100	100	3½"	20.00	77.00	91.00	86.00	102.00	3.15-4.00	123.00	CXE1FW100
110	110	-	20.00	86.00	100.00	101.00	110.50	3.15-4.00	134.00	CXE1FW110
115	115	-	20.00	86.00	102.00	101.50	110.50	3.15-4.00	134.00	CXE1FW115

Tolerance: ±1 mm

A2F Flameproof Exd Cable Gland

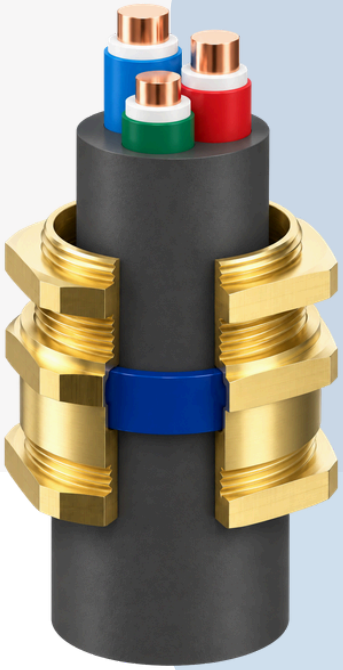

Technical Specifications:

Material	:	Brass BS 2874 and also available in Nickle Plated Brass
Thread	:	Metric, NPT and PG
Operating Temp.	:	-60°C to +130°C
Features	:	Outer Displacement seal
Accessories	:	Shroud, Earth Tag, Lock Nut, Serrated Washer, Entry Thread Seal, Adaptor and Reducer

Application:


Provides a combined flameproof and environmental seal on the outer sheath of various types of unarmoured cables, making it suitable for indoor and outdoor installations in hazardous areas.



Size	Thread "C"		Thread Length	Cable Range Dia.		Across Flat	Across Corners	CABNIX Code
	Metric	NPT	"D"	Min. "A"	Max. "B"			
16	16	-	15	3.1	8.6	21	23	CXA2F16
20S	20	1/2"	15	6.1	11.6	24	26.5	CXA2F20S
20	20	1/2"	15	6.5	13.9	27	30	CXA2F20
25	25	3/4"	15	11.1	19.9	36	39.75	CXA2F25
32	32	1"	15	17	26.15	41	46	CXA2F32
40	40	1¼"	15	22	32.1	49.25	55	CXA2F40
50S	50	1½"	15	29.8	38.1	54.75	61.3	CXA2F50S
50	50	2"	15	36.9	43.3	60	66.5	CXA2F50
63S	63	2"	15	42.2	49.9	70.25	77.5	CXA2F63S
63	63	2½"	15	48.3	54.9	74.75	83	CXA2F63
75S	75	2½"	15	54.2	62	80	89	CXA2F75S
75	75	3"	15	59.8	66.9	84	94	CXA2F75
90	90	3"	18	66.6	79.3	107	119.7	CXA2F90
100	100	3½"	20	77	91	122	132	CXA2F100
110	110	-	20	86	100	138	148	CXA2F110
115	115	-	20	86	102	138	148	CXA2F115

Tolerance: ±1 mm

A2F Flameproof Exd Cable Gland

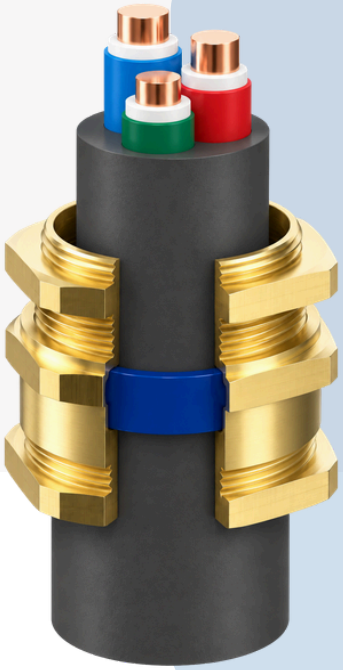

Technical Specifications:

Material	:	Brass BS 2874 and also available in Nickle Plated Brass
Thread	:	Metric, NPT and PG
Operating Temp.	:	-60°C to +130°C
Features	:	Outer Displacement seal
Accessories	:	Shroud, Earth Tag, Lock Nut, Serrated Washer, Entry Thread Seal, Adaptor and Reducer

Application:

Provides a combined flameproof and environmental seal on the outer sheath of various types of unarmoured cables, making it suitable for indoor and outdoor installations in hazardous areas.



Size	Thread "C"		Thread Length	Cable Range Dia.		Across Flat	Across Corners	CABNIX Code
	Metric	NPT	"D"	Min. "A"	Max. "B"			
16	16	-	15	3.1	8.6	21	23	CXA2F16
20S	20	1/2"	15	6.1	11.6	24	26.5	CXA2F20S
20	20	1/2"	15	6.5	13.9	27	30	CXA2F20
25	25	3/4"	15	11.1	19.9	36	39.75	CXA2F25
32	32	1"	15	17	26.15	41	46	CXA2F32
40	40	1¼"	15	22	32.1	49.25	55	CXA2F40
50S	50	1½"	15	29.8	38.1	54.75	61.3	CXA2F50S
50	50	2"	15	36.9	43.3	60	66.5	CXA2F50
63S	63	2"	15	42.2	49.9	70.25	77.5	CXA2F63S
63	63	2½"	15	48.3	54.9	74.75	83	CXA2F63
75S	75	2½"	15	54.2	62	80	89	CXA2F75S
75	75	3"	15	59.8	66.9	84	94	CXA2F75
90	90	3"	18	66.6	79.3	107	119.7	CXA2F90
100	100	3½"	20	77	91	122	132	CXA2F100
110	110	-	20	86	100	138	148	CXA2F110
115	115	-	20	86	102	138	148	CXA2F115

Tolerance: ±1 mm


Cable Glands Accessories



PVC Shroud

PVC Shroud are used for covering the Cable Glands as additional protection against weather conditions and corrosion.


Material	:	PVC
Application	:	Minimises the risk of dirt or foreign substances gathering on the cable gland body and / or point of cable to the gland inter face.

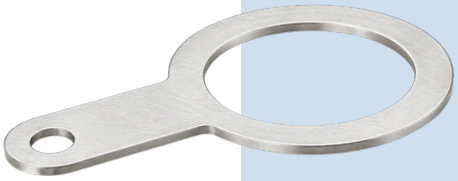

Earth Tag

EarthTag ensures earthing continuity between Gland and Enclosure.

Material	:	PVC
Plating	:	Nickle Plated
Application	:	Used with cable gland, adaptor & reducer to provide a means of conneting a exible earth bond.

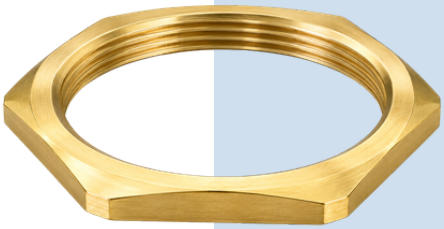

Lock Nut

fastening glands to the gland plate.

Material	:	Brass, Aluminium & Galvanized Steel
Thread	:	Available in Metric, Imperial, NPT, BSPT, BSP, & PG

SINCE 2001

CABNIX

A Brand of Varudi Brass Products

+91 7990653356

info@cabnix.in

www.cabnix.in

Plot no. K1 530B, GIDC PHASE 2,
Dared, Jamnagar, Gujarat(INDIA), 361004