Assignment 3

ques1

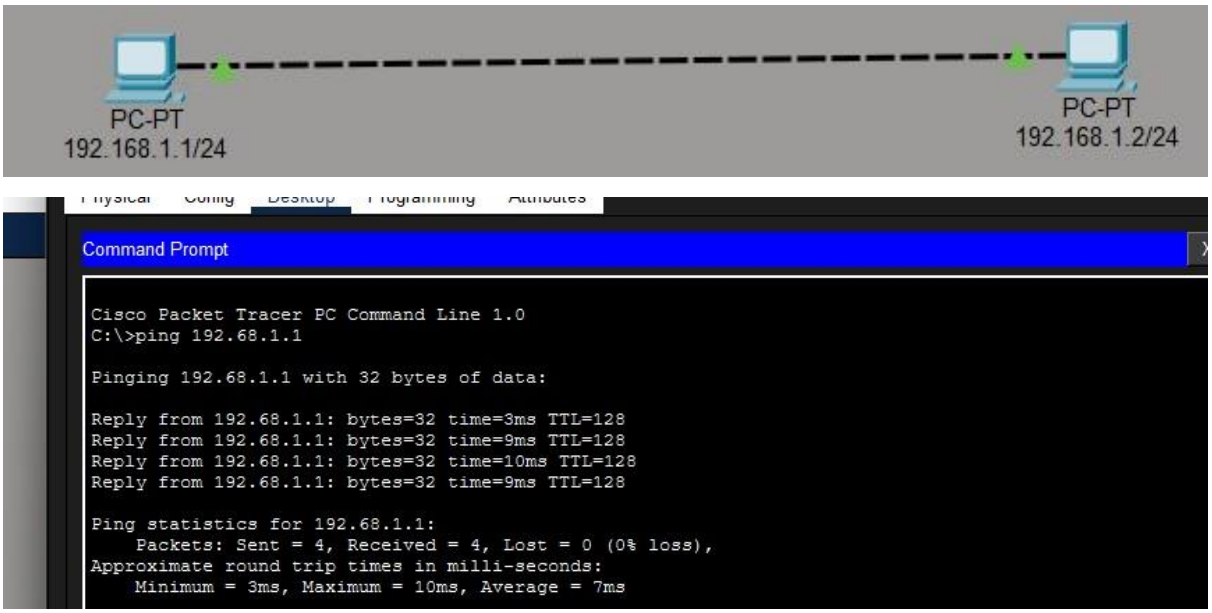

Ques 2

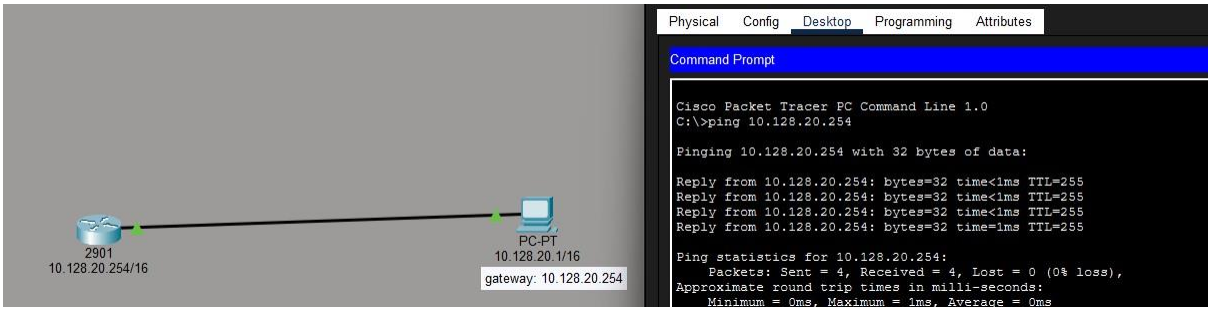


```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 10.128.20.254 255.0.0.0
Router(config-if)#ip address 10.128.20.254 255.0.0.0
Router(config-if)#
Router(config-if)#enable
                  ^
% Invalid input detected at '^' marker.

Router(config-if)#configure terminal
                  ^
% Invalid input detected at '^' marker.

Router(config-if)#interface GigabitEthernet0/0
Router(config-if)#ip address 10.128.20.254 255.255.0.0
Router(config-if)#no shutdown

Router(config-if)#``` [cite: 12]
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
```

Q3

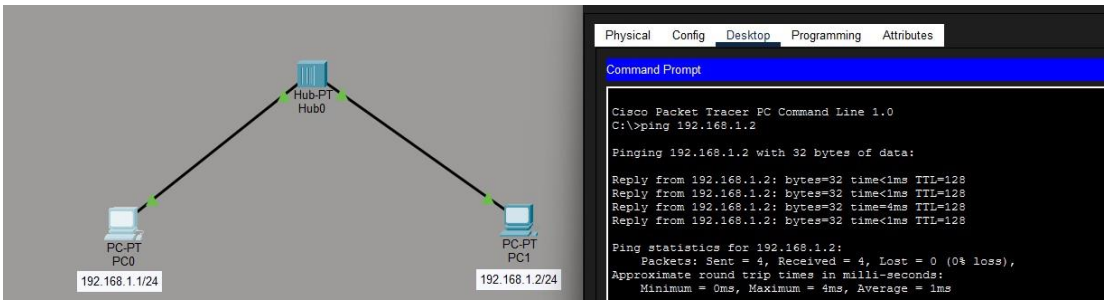
Hub-PT
Hub0
PC-PT
PC0
192.168.1.1/24
PC-PT
PC1
192.168.1.2/24
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=4ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 1ms

Q4

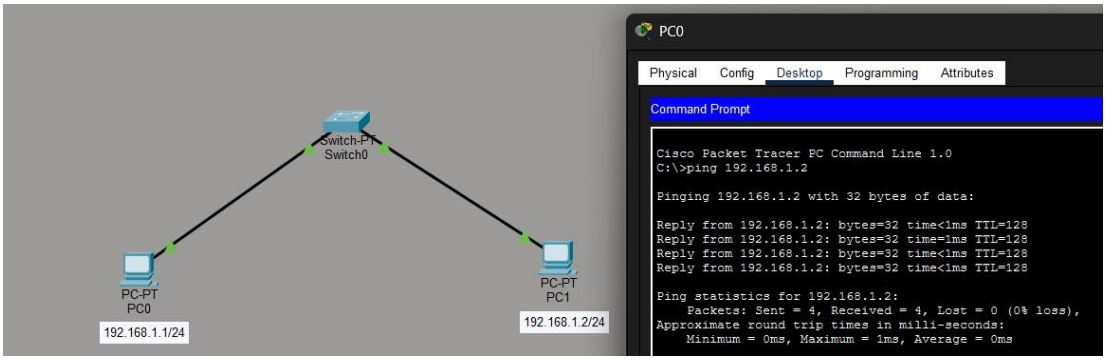
Switch-PT
Switch0
PC-PT
PC0
192.168.1.1/24
PC-PT
PC1
192.168.1.2/24
PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms

Q5 (a)

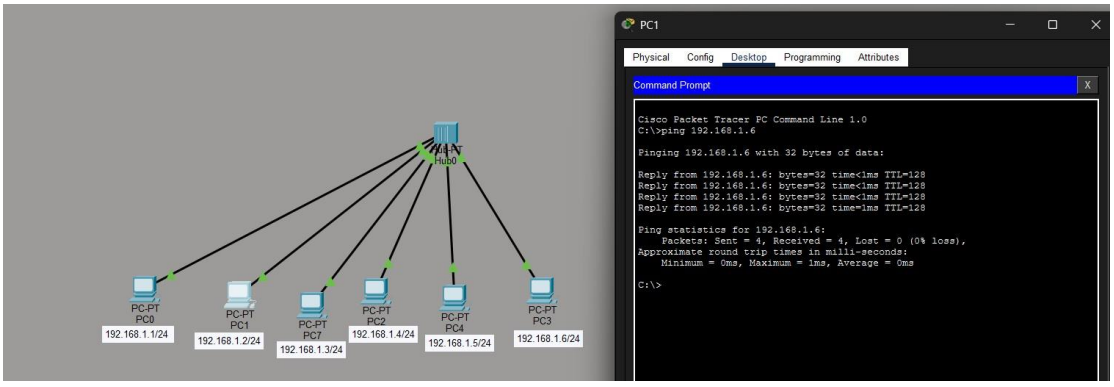
Hub0
PC-PT
PC0
192.168.1.1/24
PC-PT
PC1
192.168.1.2/24
PC-PT
PC7
192.168.1.3/24
PC-PT
PC2
192.168.1.4/24
PC-PT
PC4
192.168.1.5/24
PC-PT
PC3
192.168.1.6/24
PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.6
Pinging 192.168.1.6 with 32 bytes of data:
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time=1ms TTL=128
Ping statistics for 192.168.1.6:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>

(b)

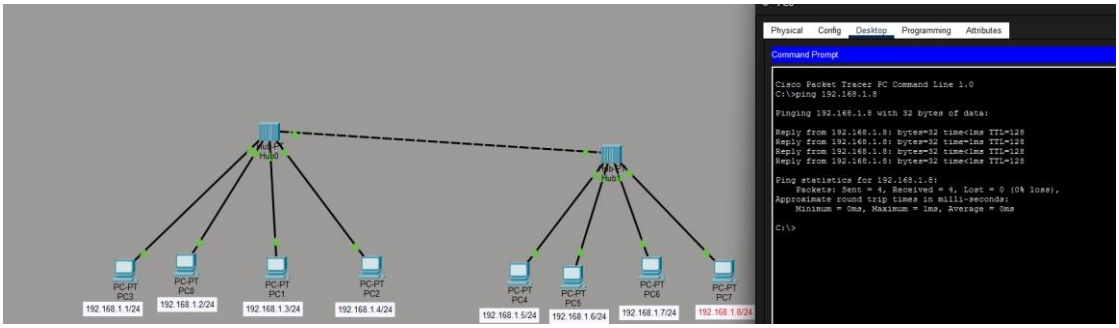
Hub0
Hub1
192.168.1.1/24
192.168.1.2/24
192.168.1.3/24
192.168.1.4/24
192.168.1.5/24
192.168.1.6/24
192.168.1.7/24
192.168.1.8/24
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.8
Pinging 192.168.1.8 with 32 bytes of data:
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.8:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>

Q6

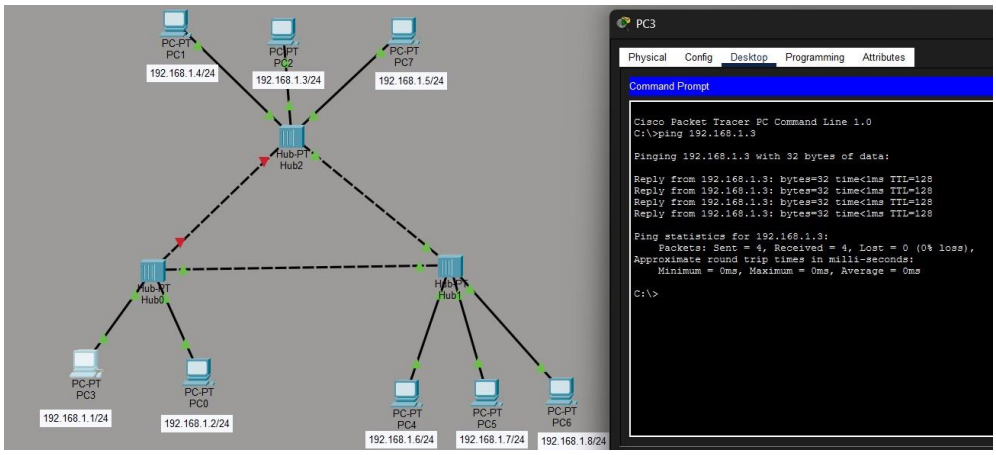
PC-PT PC1
192.168.1.4/24
PC-PT PC2
192.168.1.3/24
PC-PT PC7
192.168.1.5/24
Hub-PT Hub2
Hub-PT Hub0
Hub-PT Hub1
PC-PT PC3
192.168.1.1/24
PC-PT PC0
192.168.1.2/24
PC-PT PC4
192.168.1.6/24
PC-PT PC5
192.168.1.7/24
PC-PT PC6
192.168.1.8/24
PC3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>

Q7

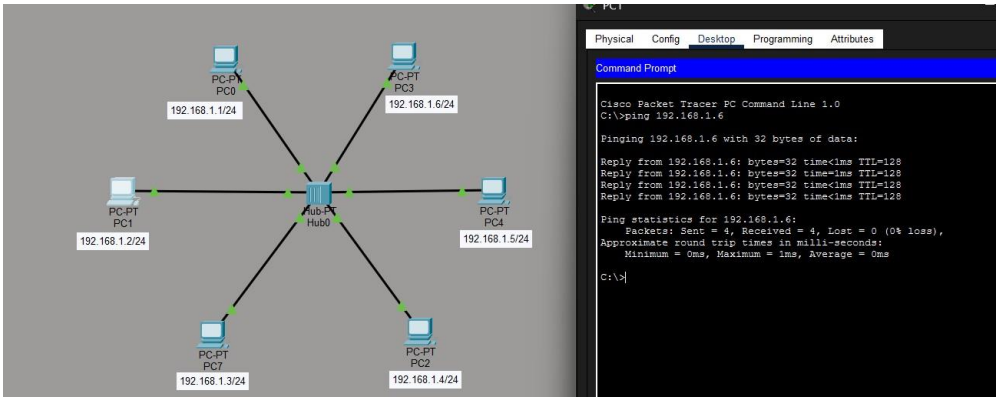
PC-PT PC0
192.168.1.1/24
PC-PT PC3
192.168.1.6/24
PC-PT PC1
192.168.1.2/24
Hub-PT Hub0
PC-PT PC4
192.168.1.5/24
PC-PT PC7
192.168.1.3/24
PC-PT PC2
192.168.1.4/24
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.6
Pinging 192.168.1.6 with 32 bytes of data:
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time=1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.6:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>

Q8

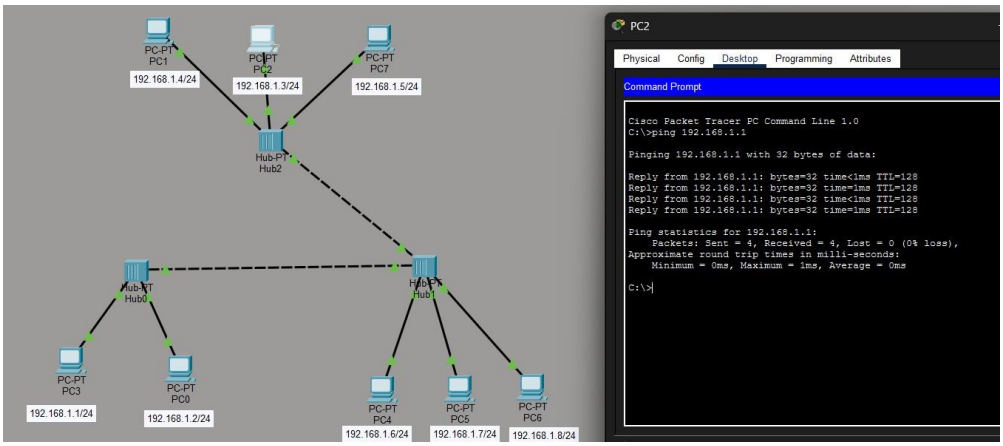
PC-PT PC1
192.168.1.4/24
PC-PT PC2
192.168.1.3/24
PC-PT PC7
192.168.1.5/24
Hub-PT Hub2
Hub-PT Hub0
Hub-PT Hub1
PC-PT PC3
192.168.1.1/24
PC-PT PC0
192.168.1.2/24
PC-PT PC4
192.168.1.6/24
PC-PT PC5
192.168.1.7/24
PC-PT PC6
192.168.1.8/24
PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1
Pinging 192.168.1.1 with 32 bytes of data:
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time=1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time=1ms TTL=128
Ping statistics for 192.168.1.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>