

EASY

Network Camera

Easy Series


Products from the Easy series are the most popular choices for entry-level applications such as residential and small retail stores. It consists of EasyBasic series IP cameras and the new Easystar series IP cameras.

They all feature Ultra 265 compression technology developed exclusively by Uniview. Their most important business value is to provide excellent performance at an affordable price.

Besides, Easy series products are very easy to install and maintain, allowing them to be set up anywhere in seconds. Easy series products are the most cost-effective option for residential and small business applications.

Updated U-code Technology


Virtual I Frame:
only 10% data of real I Frame
in static scene

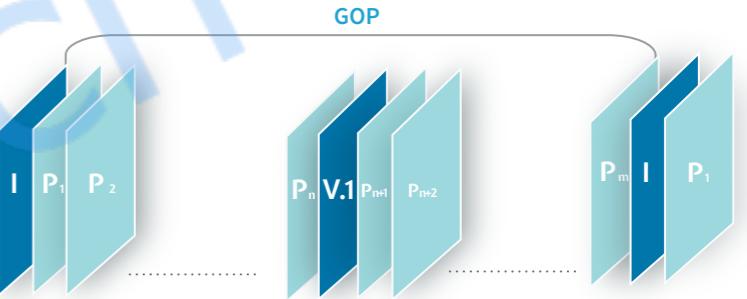

EasyStar Technology

EasyStar provides low-cost solution in low-light environments.

The long-range night IR visibility extends up to 50 meters (bullet models only).

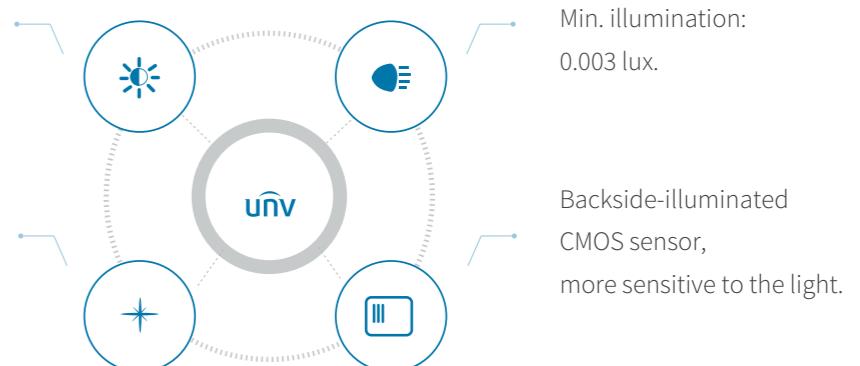

Indoor & Outdoor Image Performance



Traditional IP camera



EasyStar IP camera




Traditional IP camera



EasyStar IP camera

EasyStar products significantly reduce blurring, delivering clear, bright, and colorful images.



ANR

SD card for edge storage
Upload video in NVR after network reconnection



Network disconnection detection

Regularly detect network connection status.
Automatically reset the network or reset the IP camera if a network disconnection is detected.



One-click download/upload configuration

Quickly configure all IP cameras with one-click duplication of uploaded parameters.



One-click output diagnosis log


Easily output diagnostic logs for effective troubleshooting.

Smart Dual-Light Technology

3 Light Modes



No events
IR on

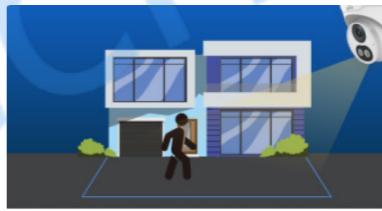

Human/Vehicle (Events) detected
Warm light on, provide colorful images with more details



Human/Vehicle leaves (Events end)
Back to IR on


IPC2128LE-ADF28(40)KMC-DL

- Smart dual light
- 120dB true WDR
- IP67 water proof
- Up to 30m IR & warm light distance
- 8MP@20fps(3840×2160)
- Built-in mic & speaker, built-in SD card slot
- Ultra 265, up to 95% bandwidth reduction





5th-Gen Night View Technology First in Industry

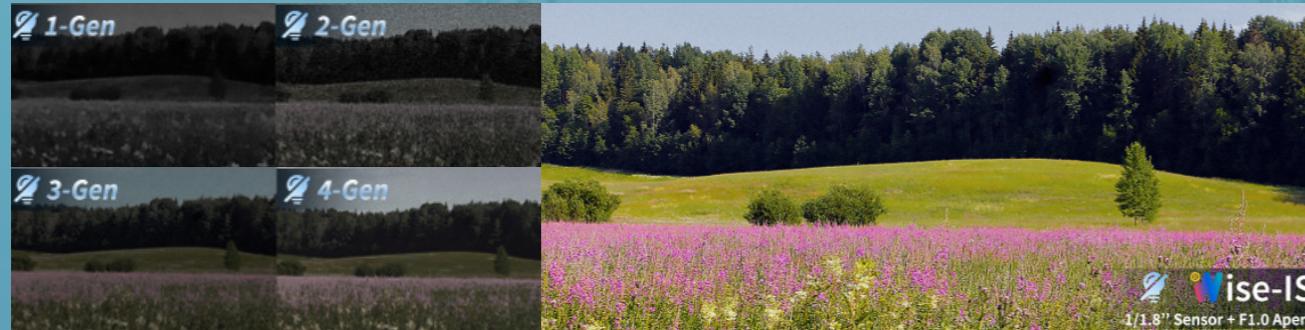

Great Image Improvement Through Software



Powered by Wise-ISP



F1.0 Aperture



Up to 1/1.8" Big Sensor



Wise-ISP



Advantages

- Increases light input by 4 times compared to F2.0.
- Captures 180% more light than a 1/2.8" sensor.
- Powered by Wise-ISP to restore the scene's true colors.

EASY Basic



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2122LB-AF28(40)K-DL

ColorHunter
1/2.9" 2MP CMOS
Digital WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 101.1°/83.7°
Fixed
Colour: 0.005 lux (F1.6, AGC ON) 0 Lux with light
Up to 30m (98ft)
Ultra 265, H.265, H.264
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3612LB-AF28K-DL

ColorHunter
1/2.9" 2MP CMOS
Digital WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view(H): 101.1°
Fixed
Colour: 0.005 lux (F1.6, AGC ON) 0 Lux with light
Up to 30m (98ft)
Ultra 265, H.265, H.264
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

EASY Basic



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3612LB-ADF28(40)K-H

Low-light
1/2.7" 2MP CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4.0mm Iris: F2.0 Angle of view (H): 112.9°/91.2°
Fixed
Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC2322LB-ADZK-H

Low-light
1/2.7" 2MP CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 103.6°~33.4°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 50 m (164 ft)
Ultra 265, H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2122LB-ADF28(40)KM-H

Low-light
1/2.7" 2MP CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4.0mm Iris: F2.0 Angle of view (H): 112.9°/91.2°
Fixed
Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC322LB-ADF28(40)K-H

Low-light
1/2.7" 2MP CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4.0mm Iris: F2.0 Angle of view (H): 112.9°/91.2°
Fixed
Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3532LB-ADZK-H

Low-light
1/2.7" 2MP CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 103.6°~33.4°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131 ft)
Ultra 265, H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3632LB-ADZK-H

Low-light
1/2.7" 2MP CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 103.6°~33.4°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131 ft)
Ultra 265, H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

EASY Basic



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2124LB-AF28(40)K-DL

ColorHunter
1/3.0"/4MP/CMOS
Digital WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 97.0°/ 79.0°
Fixed
Colour: 0.01 lux (F1.6, AGC ON) 0 lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
2560*1440 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3614LB-AF28K-DL

ColorHunter
1/3.0"/4MP/CMOS
Digital WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view(H): 97.0°
Fixed
Colour: 0.01 lux (F1.6, AGC ON) 0 lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
2560*1440 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

EASY Basic



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3614LB-ADF28(40)K-H

Low-light
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F2.0 Angle of view(H): 101.5°/84.1°
Fixed
Colour: 0.01 lux (F2.0, AGC ON) 0 lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
2560*1440 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC2324LB-ADZK-H

Low-light
1/3"/4MP/CMOS
120dB True WDR
Motorized
Focus: 2.8-12mm Iris: F1.6 Angle of view(H): 91.5°~34°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 50 m (164 ft)
Ultra 265, H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2124LB-ADF28(40)KM-H

Low-light
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F2.0 Angle of view(H): 101.5°/84.1°
Fixed
Colour: 0.01 lux (F2.0, AGC ON) 0 lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
2560*1440 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC324LB-ADF28(40)K-H

Low-light
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F2.0 Angle of view(H): 101.5°/84.1°
Fixed
Colour: 0.01 lux (F2.0, AGC ON) 0 lux with IR
Up to 30m (98ft)
Ultra 265, H.265, H.264, MJPEG
✓
2560*1440 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3534LB-ADZK-H

Low-light
1/3"/4MP/CMOS
120dB True WDR
Motorized
Focus: 2.8-12mm Iris: F1.6 Angle of view(H): 91.5°~34°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265, H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3634LB-ADZK-H

Low-light
1/3"/4MP/CMOS
120dB True WDR
Motorized
Focus: 2.8-12mm Iris: F1.6 Angle of view(H): 91.5°~34°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265, H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

EASY Basic



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR/LED
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2325LB-ADZK-H

Low-light
1/2.7"/5MP/CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 96.4°~32.7°
Fixed
Color: 0.001Lux (F1.6, AGC ON) 0Lux with IR
Up to 50 m (164 ft)
Ultra 265, H.265, H.264, MJPEG
✓
2880*1620 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3535LB-ADZK-H

Low-light
1/2.7"/5MP/CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 96.4°~32.7°
Fixed
Color: 0.001Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265, H.265, H.264, MJPEG
✓
2880*1620 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

EASY EasyStar



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2122LE-ADF28(40)KMC-DL

ColorHunter
1/2.8"/2MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.6 Angle of view (H):106.7°/87.5°
Fixed
Colour: 0.003 lux (F1.6, AGC ON) 0 Lux with light
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic,Built-in Speaker
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3612LE-ADF28(40)KC-DL

ColorHunter
1/2.8"/2MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.6 Angle of view (H):106.7°/87.5°
Fixed
Colour: 0.003 lux (F1.6, AGC ON) 0 Lux with light
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic,Built-in Speaker
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR/LED
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3635LB-ADZK-H

Low-light
1/2.7"/5MP/CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 96.4°~32.7°
Fixed
Color: 0.001Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265, H.265, H.264, MJPEG
✓
2880*1620 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2312LE-ADF28(40)KM-WP

ColorHunter
1/2.7"/2MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.0 Angle of view (H):99.0° / 77.5°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3522LE-ADF28(40)K-WP

ColorHunter
1/2.7"/2MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.0 Angle of view (H):99.0° / 77.5°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
N/A
Ultra265,H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

EASY EasyStar



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3622LE-ADF28(40)K-WP

ColorHunter
1/2.7"/2MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.0 Angle of view (H):99.0°/ 77.5°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
N/A
Ultra265,H.265, H.264, MJPEG
✓
1920*1080 30fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC2124LE-ADF28(40)KM-H

EasyStar
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 97.0°/ 79.0°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 50m (164ft)
Ultra265,H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

EASY EasyStar



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2124LE-ADF28(40)KMC-DL

ColorHunter
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.6 Angle of view (H):97.0°/79.0°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic,Built-in Speaker
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3614LE-ADF28(40)KC-DL

ColorHunter
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.6 Angle of view (H):97.0°/79.0°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC324LE-ADF28(40)K-H

EasyStar
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 97.0°/ 79.0°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265, H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3614LE-ADF28(40)K-H

EasyStar
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 97.0°/ 79.0°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265, H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant



IPC2314LE-ADF28(40)KM-WP

ColorHunter
1/1.8"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.0 Angle of view (H): 110.4°/ 88.2°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3524LE-ADF28(40)K-WP

ColorHunter
1/1.8"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.0 Angle of view (H): 110.4°/ 88.2°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3624LE-ADF28(40)K-WP

ColorHunter
1/1.8"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4.0mm Iris: F1.0 Angle of view (H): 110.4°/ 88.2°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
2688*1520 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC2125LE-ADF28(40)KM-H**

EasyStar
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H):110.0°/91.2°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 50m (164ft)
Ultra265,H.265, H.264, MJPEG
✓
2880*1620 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2128LE-ADF28(40)KM-H

EasyStar
1/2.8"/8MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 83.1°/98.7°
Fixed
Color: 0.005Lux (F1.6, AGC ON) 0Lux with IR
Up to 50m (164ft)
Ultra265, H.265,H.264, MJPEG
✓
3840*2160 20fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC328LE-ADF28(40)K-H**

EasyStar
1/2.8"/8MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 98.7°/83.1°
Fixed
Color: 0.005Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265, H.265,H.264, MJPEG
✓
3840*2160 20fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC325LE-ADF28(40)K-H

EasyStar
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H):110.0°/91.2°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
2880*1620 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC3615LE-ADF28(40)K-H**

EasyStar
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H):110.0°/91.2°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265,H.265, H.264, MJPEG
✓
2880*1620 25fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC3618LE-ADF28(40)K-H**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

**IPC2128LE-ADF28(40)KMC-DL**

ColorHunter
1/2.8"/8MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 98.7°/83.1°
Fixed
Color: 0.005Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265, H.265,H.264, MJPEG
✓
3840*2160 20fps
Built-in Mic,Built-in Speaker
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3618LE-ADF28(40)KC-DL**IPC2318LE-ADF28(40)KM-WP**

ColorHunter
1/1.8"8MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view(H): 98.7°/83.1°
Fixed
Color: 0.005Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra265, H.265,H.264, MJPEG
✓
3840*2160 20fps
Built-in Mic,Built-in Speaker
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2322LB-ADEZK-H**IPC3532LB-ADEZK-H****Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3528LE-ADF28(40)K-WP**IPC3628LE-ADF28(40)K-WP**

ColorHunter
1/1.8"8MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4.0mm Iris: F1.0 Angle of view (H): 111.0°/ 94.2°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
N/A
Ultra265, H.265,H.264, MJPEG
✓
3840*2160 20fps
Built-in Mic
N/A
N/A
Micro SD, up to 512 GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2324LB-ADEZK-H**IPC3534LB-ADEZK-H**

**Appearance****IPC245LP-ADF40(60)KC-WP**

Low illumination characteristics	ColorHunter
Sensor	1/1.8"/5MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 4.0mm,6.0mm Iris: F1.0 Angle of view (H):88.2°/61.8°
Iris	Fixed
Min. illumination	Color: 0.0003Lux (F1.0, AGC ON)
IR	N/A
Video Compression	Ultra265,H.265,H.264, MJPEG
Smart Function	/
Frame Rate	2880*1620 25fps
Audio I/O	1 / 1 (Built-in Mic,Built-in Speaker)
Alarm I/O	1 / 1
BNC	N/A
Edge Storage	Micro SD, up to 512 GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

PRIME

Network Camera

Prime Series

Incredibly, you can always find the ideal product in the UNV Prime range, which features even more advanced capabilities for excellent performance. Each Prime series is designed specifically for a particular market. Prime-III includes professional cameras for color imaging in ultra-low light conditions, powered by LightHunter and ColorHunter.

Prime-II can elevate your projects with its professional appearance, upgraded hardware, excellent image effects, and innovative smart functions.

Compared to the Easy series, the Prime-I series features enhanced hardware, including WDR, audio, alarms, and SD card support. Prime products are commonly used in commercial buildings, parks, and small-scale applications to effectively ensure safety.

LightHunter

LightHunter



Indoor



Traditional IPC



LightHunter IPC



Traditional IPC



LightHunter IPC

Outdoor



Powered by Wise-ISP



F1.0 Aperture



Up to 1/1.2" Big Sensor




Wise-ISP



Advantages

- Great image performance with 4K resolution & 1/1.2" sensor.
- Powered by Wise-ISP to restore the scene's true colors.
- Built-in with multiple smart functions.
- Comprehensive hardware design, including professional housing, audio & alarm I/O, IP67 & IK10 ratings, etc.

Tri-Guard 2.0

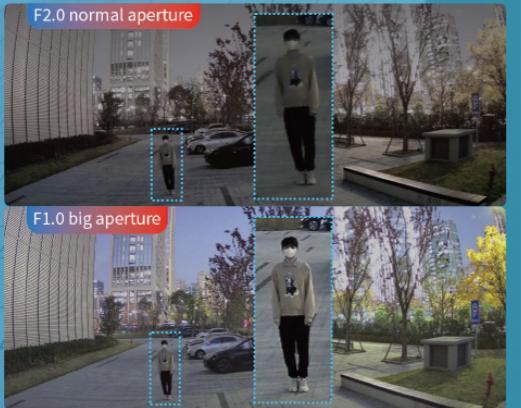

Excellent low-light performance



Advantages

- Upgraded red and blue lights for stronger deterrence.
- Integrated Smart Intrusion Prevention, ColorHunter, and Active Deterrence into one camera.
- Provides different deterrence modes for various scenes with smart dual-light.
- The dual-lens turret offers a 180° wide-angle panoramic image.

Prime I



Appearance

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 106.7°/87.5°
Iris	Fixed
Min. illumination	Color: 0.001Lux (F1.6, AGC ON) 0 Lux with IR
IR	Up to 40m (131ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 30fps
Audio I/O	Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

IPC2122SB-ADF28(40)KM-I0



IPC2312SB-ADF40KM-I0

LightHunter	LightHunter
1/2.8"/2MP/CMOS	1/2.8"/2MP/CMOS
120dB True WDR	120dB True WDR
Fixed	Fixed
Focus: 4mm Iris: F1.6 Angle of view (H): 87.5°	Focus: 4mm Iris: F1.6 Angle of view (H): 87.5°
Color: 0.001Lux (F1.6, AGC ON) 1 Lux with IR	Color: 0.001Lux (F1.6, AGC ON) 1 Lux with IR
Up to 80m (262ft)	Up to 80m (262ft)
Ultra 265,H.265, H.264,MJPEG	Ultra 265,H.265, H.264,MJPEG
✓	✓
1920*1080 30fps	1920*1080 30fps
Built-in Mic	Built-in Mic
N/A	1 / 1
N/A	N/A
MicroSD, up to 512GB	MicroSD, up to 512GB
10M/100M Base-TX Ethernet	10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)	DC 12V ±25% PoE (IEEE 802.3af)
IP67	IP67
N/A	N/A



IPC2222SB-AHDF28(40)(60)KM-I1



IPC322SB-DF28(40)K-I0

Appearance

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm, 6mm Iris: F1.6 Angle of view (H): 105.9°/86.9°/54°
Iris	Fixed
Min. illumination	Color: 0.001Lux (F1.6, AGC ON) 0 Lux with IR
IR	Up to 80m (262ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 60fps
Audio I/O	1 / 1 , Built-in Mic
Alarm I/O	1 / 1
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

LightHunter	LightHunter
1/2.8"/2MP/CMOS	1/2.8"/2MP/CMOS
120dB True WDR	120dB True WDR
Fixed	Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 106.7°/87.5°	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 106.7°/87.5°
Color: 0.001Lux (F1.6, AGC ON) 0 Lux with IR	Color: 0.001Lux (F1.6, AGC ON) 0 Lux with IR
Up to 30m (98ft)	Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG	Ultra 265,H.265, H.264,MJPEG
✓	✓
1920*1080 30fps	1920*1080 30fps
1 / 1	1 / 1
N/A	N/A
MicroSD, up to 512GB	MicroSD, up to 512GB
10M/100M Base-TX Ethernet	10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)	DC 12V ±25% PoE (IEEE 802.3af)
IP67	IP67
IK10	IK10

**Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 106.7°/87.5°
Iris	Fixed
Min. illumination	Color: 0.001Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 30fps
Audio I/O	Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

IPC312SB-ADF28K-I0**IPC3612SB-ADF28(40)KM-I0**

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm Iris: F1.6 Angle of view (H): 106.7°
Iris	Fixed
Min. illumination	Color: 0.001Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 30fps
Audio I/O	1/1 , Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

**Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 107.4°~29.2°
Iris	Fixed
Min. illumination	Color: 0.001Lux (F1.2, AGC ON) 0Lux with IR
IR	Up to 40m (131ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 30fps
Audio I/O	Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

IPC3632SB-ADZK-I0**IPC2322SB-HDZK-I0**

Lighthunter	1/2.8"/2MP/CMOS
120dB True WDR	120dB True WDR
Motorized	Motorized
Focus:2.7~13.5mm Iris:F1.2 Angle of view(H):30.6°~98.2°	Focus:2.7~13.5mm Iris:F1.2 Angle of view(H):30.6°~98.2°
Fixed	Fixed
Color: 0.001Lux (F1.2, AGC ON) 0Lux with IR	Color: 0.001Lux (F1.2, AGC ON) 0Lux with IR
Up to 50m(164 ft)	Up to 50m(164 ft)
Ultra265,H.265, H.264,MJPEG	Ultra265,H.265, H.264,MJPEG
✓	✓
1920*1080 60fps	1920*1080 60fps
1/1	1/1
N/A	N/A
MicroSD, up to 512GB	MicroSD, up to 512GB
10M/100M Base-TX Ethernet	10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE802.3af)	DC 12V ±25% PoE (IEEE802.3af)
IP67	IP67
IK10	IK10

**Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 107.4°~29.2°
Iris	Fixed
Min. illumination	Color: 0.001Lux (F1.2, AGC ON) 0Lux with IR
IR	Up to 50m (164ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 30fps
Audio I/O	1 / 1
Alarm I/O	1 / 1
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

IPC3232SB-ADZK-I0

LightHunter	1/2.8"/2MP/CMOS
120dB True WDR	120dB True WDR
Motorized	Motorized
Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 107.4°~29.2°	Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 107.4°~29.2°
Fixed	Fixed
Color: 0.001Lux (F1.2, AGC ON) 0Lux with IR	Color: 0.001Lux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)	Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG	Ultra 265,H.265, H.264,MJPEG
✓	✓
1920*1080 30fps	1920*1080 30fps
1 / 1	1 / 1
N/A	N/A
MicroSD, up to 512GB	MicroSD, up to 512GB
10M/100M Base-TX Ethernet	10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)	DC 12V ±25% PoE (IEEE 802.3af)
IP67	IP67
IK10	IK10

Appearance

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus: 2.7~13.5mm Iris: F1.2 Angle of view(H):30.6°~98.2°
Iris	Fixed
Min. illumination	Color: 0.001Lux (F1.2, AGC ON) 0Lux with IR
IR	Up to 50m(164 ft)
Video Compression	Ultra265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 60fps
Audio I/O	1/1
Alarm I/O	2/1
BNC	✓
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

IPC3232SB-AHDZK-I0**IPC2322SB-HDZK-PI-I0**

LightHunter	1/2.8"/2MP/CMOS
120dB True WDR	120dB True WDR
Motorized	Motorized
Focus:2.8~12mm Iris:F1.4 Angle of view(H):100.3°~32°	Focus:2.8~12mm Iris:F1.4 Angle of view(H):100.3°~32°
P-iris	P-iris
Color: 0.001Lux (F1.4, AGC ON) 0Lux with IR	Color: 0.001Lux (F1.4, AGC ON) 0Lux with IR
Up to 50m(164 ft)	Up to 50m(164 ft)
Ultra265,H.265, H.264,MJPEG	Ultra265,H.265, H.264,MJPEG
✓	✓
1920*1080 60fps	1920*1080 60fps
1 / 1	1 / 1
N/A	N/A
MicroSD, up to 512GB	MicroSD, up to 512GB
10M/100M Base-TX Ethernet	10M/100M Base-TX Ethernet
-30°C ~ 60°C (-22°F ~ 140°F)	-30°C ~ 60°C (-22°F ~ 140°F)
IP67	IP67
IK10	IK10
0.93kg(2.16lb)	0.93kg(2.16lb)

**Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus:2.8~12mm Iris:F1.4 Angle of view(H):100.3°~32°
Iris	P-iris
Min. illumination	Color: 0.001Lux (F1.4, AGC ON) 0Lux with IR
IR	Up to 40m(131 ft)
Video Compression	Ultra265,H.265,H.264,MJPEG
Smart Function	✓
Frame Rate	1920*1080 60fps
Audio I/O	1/1
Alarm I/O	2/1
BNC	✓
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	-30°C ~ 60°C (-22°F ~ 140°F)
Ingress Protection	IK10
Vandal Resistant	0.93kg(2.05lb)

**IPC2314SB-ADF40KM-I0**

Low illumination characteristics	LightHunter
Sensor	1/2.7"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 4mm Iris: F1.6 Angle of view (H): 83.7°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 80m (262ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688*1520 30fps
Audio I/O	Built-in Mic
Alarm I/O	1/1
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**IPC324SB-DF28(40)K-I0**

Low illumination characteristics	LightHunter
Sensor	1/3"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 101.1°/83.7°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688*1520 30fps
Audio I/O	1/1
Alarm I/O	1/1
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

**IPC3614SB-ADF28(40)KM-I0**

Low illumination characteristics	LightHunter
Sensor	1/3"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 101.1°/83.7°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688*1520 30fps
Audio I/O	Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.7"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 101.1°/83.7°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (131ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688*1520 30fps
Audio I/O	Built-in Mic&Speaker
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**IPC2124SB-ADF28(40)KMC-I0**

Low illumination characteristics	LightHunter
Sensor	1/3"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 101.1°/83.7°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 40m (131ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688*1520 30fps
Audio I/O	Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**IPC3614SB-ADF28(40)KMC-I0**

Low illumination characteristics	LightHunter
Sensor	1/2.7"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 101.1°/83.7°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688*1520 30fps
Audio I/O	Built-in Mic&Speaker
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**IPC314SB-ADF28K-I0**

Low illumination characteristics	LightHunter
Sensor	1/3"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm Iris: F1.6 Angle of view (H): 101.1°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688*1520 30fps
Audio I/O	1/1 ,Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC314SB-ADF28K-M12-I0

LightHunter
1/3"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view (H): 101.1°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1 ,Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25%
IP67
IK10

**IPC354SB-ADNF28(40)K-I0**

LightHunter
1/2.7"/4MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4mm Iris: F1.6 Angle of view (H): 101.1°/91.5°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1 ,Built-in Mic
1/1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP66
N/A

**IPC3634SB-ADZK-I0**

LightHunter
1/2.7"/4MP/CMOS
120dB True WDR
Motorized
Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 103.58°~ 31.05°
Fixed
Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC3534SB-ADNZK-I0**

LightHunter
1/2.7"/4MP/CMOS
120dB True WDR
Motorized
Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 103.58°~ 31.05°
Fixed
Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1 ,(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP66
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2324SB-DZK-I0

LightHunter
1/2.7"/4MP/CMOS
120dB True WDR
Motorized
Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 103.58°~ 31.05°
Fixed
Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR
Up to 50m (164ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC3234SB-ADZK-I0**

LightHunter
1/2.7"/4MP/CMOS
120dB True WDR
Motorized
Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 103.58°~ 31.05°
Fixed
Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1 ,Built-in Mic
1/1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC2125SB-ADF28(40)KM-I0**

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm,4mm Iris: F1.6 Angle of view (H): 96.1°/78.7°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC2125SB-ADF28(40)KMC-I0**

ColorHunter
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 112.9°/91.2°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
Built-in Mic&Speaker
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

Prime I

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2315SB-ADF40KM-I0

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 4mm Iris: F1.6 Angle of view (H): 91.2°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 80m (262ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
Built-in Mic
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC2225SB-ADF28(40)(60)KM-I1**

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm, 6mm Iris: F1.6 Angle of view (H): 108.5°/91.5°/56.3°
Fixed
Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Up to 80m (262ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1, Built-in Mic
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Prime I

**IPC3615SB-ADF28(40)KM-I0**

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 96.1°/78.7°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC3615SB-ADF28(40)KMC-I0**

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 101.1°/83.7°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
Built-in Mic&Speaker
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**Appearance**

Low-light
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 1.68mm Iris: F2.0 Angle of view (H): 180°
Fixed
Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Up to 20m (66ft)
Ultra 265,H.265, H.264,MJPEG
Ultra 265,H.265, H.264,MJPEG
2880*1620 30fps
N/A
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

IPC2105SB-ADF16KM-I0**IPC325SB-DF28(40)K-I0**

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 96.1°/78.7°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Appearance

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Motorized
Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 106.25°~ 30.42°
Fixed
Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR
Up to 50m (164ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC2325SB-DZK-I0****IPC3235SB-ADZK-I0**

LightHunter
1/2.7"/5MP/CMOS
120dB True WDR
Motorized
Focus: 2.7~13.5mm Iris: F1.2 Angle of view (H): 106.25°~ 30.42°
Fixed
Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1 (Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.7"/5MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus: 7.7~13.5mm Iris: F1.2 Angle of view (H):106.25°~ 30.42°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR
IR	Up to 40m (131ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	2880*1620 30fps
Audio I/O	Built-in Mic
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

IPC3605SB-ADF16KM-I0

Low-light	1/2.7"/5MP/CMOS
Sensor	120dB True WDR
Wide Dynamic Range	Fixed
Zoom	Focus: 1.68mm Iris: F2.0 Angle of view (H): 180°
Lens	Fixed
Iris	Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Min. illumination	Up to 20m (66ft)
IR	Ultra 265,H.265, H.264,MJPEG
Video Compression	✓
Smart Function	2880*1620 30fps
Frame Rate	N/A
Audio I/O	N/A
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

**IPC2228SB-ADF28(40)KM-I1****Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.7"/8MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 97°/84°
Iris	Fixed
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 80m (262ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	3840*2160 30fps
Audio I/O	1 / 1 , Built-in Mic
Alarm I/O	1 / 1
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

**IPC2108SB-ADF16KM-I0**

Low-light	1/2.7"/8MP/CMOS
Sensor	120dB True WDR
Wide Dynamic Range	Fixed
Zoom	Focus: 1.68mm Iris: F2.0 Angle of view (H): 180°
Lens	Fixed
Iris	Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Min. illumination	Up to 20m (65.6ft)
IR	Ultra 265,H.265, H.264,MJPEG
Video Compression	✓
Smart Function	3840*2160 30fps
Frame Rate	N/A
Audio I/O	N/A
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.7"/8MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 112.4°/86.5°
Iris	Fixed
Min. illumination	Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	3840*2160 20fps
Audio I/O	Built-in Mic,Built-in Speaker
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

IPC2128SB-ADF28(40)KM-I0

LightHunter	1/2.7"/8MP/CMOS
Sensor	120dB True WDR
Wide Dynamic Range	Fixed
Zoom	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 112.4°/86.5°
Lens	Fixed
Iris	Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
Min. illumination	Up to 30m (98ft)
IR	Ultra 265,H.265, H.264,MJPEG
Video Compression	✓
Smart Function	3840*2160 20fps
Frame Rate	Built-in Mic
Audio I/O	N/A
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**IPC328SB-ADF28(40)K-I0****Appearance**

Low illumination characteristics	LightHunter
Sensor	1/2.7"/8MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 112.9°/91.2°
Iris	Fixed
Min. illumination	Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 30m (98ft)
Video Compression	Ultra 265,H.265, H.264,MJPEG
Smart Function	✓
Frame Rate	3840*2160 20fps
Audio I/O	1 / 1 (Built-in Mic)
Alarm I/O	1 / 1
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

**IPC3618SB-ADF28(40)KM-I0**

LightHunter	1/2.7"/8MP/CMOS
Sensor	120dB True WDR
Wide Dynamic Range	Fixed
Zoom	Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 112.4°/86.5°
Lens	Fixed
Iris	Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
Min. illumination	Up to 30m (98ft)
IR	Ultra 265,H.265, H.264,MJPEG
Video Compression	✓
Smart Function	3840*2160 20fps
Frame Rate	Built-in Mic
Audio I/O	N/A
Alarm I/O	N/A
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC 12V ±25% PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	N/A

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3618SB-ADF28(40)KMC-I0

LightHunter
1/2.7"/8MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 106.7°/87.5°
Fixed
Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 20fps
Built-in Mic&Speaker
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC318SB-ADF28K-I0**

LightHunter
1/3"/8MP/CMOS
120dB True WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view (H): 101.1°
Fixed
Color: 0.002Lux (F1.6, AGC ON) 0Lux with IR
Up to 30m (98ft)
Ultra 265,H.265, H.264,MJPEG
✗
3840*2160 20fps
1 / 1 ,Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3238SB-ADZK-I0

LightHunter
1/2.8"/8MP/CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 107.4°~ 29.2°
Fixed
Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 20fps
1 / 1 (Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC3638SB-ADZK-I0**

LightHunter
1/2.8"/8MP/CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 107.4°~ 29.2°
Fixed
Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 20fps
Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3608SB-ADF16KM-I0

Low-light
1/2.7"/8MP/CMOS
120dB True WDR
Fixed
Focus: 1.68mm Iris: F2.0 Angle of view (H): 180°
Fixed
Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Up to 20m (66ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
N/A
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC2328SB-DZK-I0**

LightHunter
1/2.8"/8MP/CMOS
120dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.6 Angle of view (H): 107.4°~ 29.2°
Fixed
Color: 0.0025Lux (F1.6, AGC ON) 0Lux with IR
Up to 50m (164ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 20fps
1 / 1
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC815SB-ADF14K-I0

Low-light
1/2.8"/5MP/CMOS
120dB True WDR
Fixed
Focus:1.4mm Iris: F2.0 Angle of View: 360°
Fixed
Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Up to 10 m (33ft)
Ultra 265, H.265, H.264, MJPEG
✓
2592*1944 30fps
1 / 1 and 1 built-in Mic
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP66
IK10

Prime II



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2B12SS-ADF28(40)K-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 100.15°/87.5°
Fixed
Colour: 0.001 lux (F1.6, AGC ON) 0 lux with IR
Up to 80 m (262 ft)
Ultra 265,H.265, H.264,MJPEG
✓
1920*1080 60fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC322SS-ADF28(40)K-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 100.15°/87.5°
Fixed
Colour: 0.001 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
1920*1080 60fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Prime II



IPC3732SS-ADZK-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.0 Angle of view (H): 96.2°~ 26.0°
Fixed
Colour: 0.0005lux (F1.0, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
1920*1080 60fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3632SS-ADZK-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.0 Angle of view (H): 96.2°~ 26.0°
Fixed
Colour: 0.0005lux (F1.0, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
1920*1080 60fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3612SS-ADF28(40)K-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 100.15°/87.5°
Fixed
Colour: 0.001 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
1920*1080 60fps
Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC2B22SS-ADZK-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.0 Angle of view (H): 96.2°~ 26.0°
Fixed
Colour: 0.001 lux (F1.0, AGC ON) 0 lux with IR
Up to 60 m (196.9 ft)
Ultra 265,H.265, H.264,MJPEG
✓
1920*1080 60fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3222SS-ADF28(40)K-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 100.15°/87.5°
Fixed
Colour: 0.003 lux (F1.6, AGC ON) 0 lux with IR
Up to 30 m (98.4 ft)
Ultra 265,H.265, H.264,MJPEG
✓
1920*1080 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC2B14SS-ADF28(40)KMC-I1

ColorHunter
1/2.7"/4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 102.3°/85.0°
Fixed
Colour: 0.001 lux (F1.0, AGC ON) 0 lux with IR
IR 40 m, Warm Light 40 m
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1(Built-in Mic and Speaker)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

Prime II



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC324SS-ADF28(40)K-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 97.68°/81.39°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3614SS-ADF28(40)K-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 97.68°/81.39°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

Prime II



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2B24SS-ADZK-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.2 Angle of view (H): 103.8°~ 29.7°
Fixed
Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR
Up to 60 m (196.9 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3734SS-ADZK-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.2 Angle of view (H): 103.8°~ 29.7°
Fixed
Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3634SS-ADF28K-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view (H): 97.68°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3634SS-ADF28(40)KMC-I1

ColorHunter
1/2.7"/4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.0 Angle of view (H): 102.3°/85.0°
Fixed
Colour:0.001 lux (F1.0, AGC ON) 0 lux with IR
IR 30 m, Warm Light 30 m
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1(Built-in Mic and Speaker)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3634SS-ADZK-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.0 Angle of view (H): 103.8°~ 29.7°
Fixed
Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3224SS-ADF28(40)K-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 97.68°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 30 m (98.4 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 25fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Prime II



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2B15SS-ADF28(40)K-I1

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 110.0°/91.2°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 80 m (262 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC2B15SS-ADF28(40)KMC-I1

ColorHunter
1/2.7"/5MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.0 Angle of view (H): 112.8°/91.2°
Fixed
Colour: 0.001 lux (F1.0, AGC ON) 0 lux with IR
IR 40 m, Warm Light 40 m
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic and Speaker)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

Prime II



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3615SS-ADF28(40)K-I1

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 110.0°/91.2°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
Built-in Mic
N/A
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3635SS-ADF28K-I1

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view (H): 110.0°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC325SS-ADF28(40)K-I1

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 110.0°/91.2°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3515SS-ADF28K-I1-HI

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view (H): 110.0°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP54
IK10

Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3635SS-ADF28(40)KMC-I1

ColorHunter
1/2.7"/5MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.0 Angle of view (H): 112.8°/91.2°
Fixed
Colour: 0.001 lux (F1.0, AGC ON) 0 lux with IR
IR 30 m, Warm Light 30 m
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic and Speaker)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC2B25SS-ADZK-I1

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Motorized
Focus: 2.7~13.5 mm Iris: F1.2 Angle of view (H): 106.3°~32.5°
Fixed
Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR
Up to 60 m (196.9 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Prime II



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3735SS-ADZK-I1

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.2 Angle of view (H):106.3°~ 32.5°
Fixed
Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3635SS-ADZK-I1

LightHunter
1/2.7"/5MP/CMOS
130dB True WDR
Motorized
Focus: 2.7 ~ 13.5 mm Iris: F1.0 Angle of view (H):106.3°~ 32.5°
Fixed
Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
2880*1620 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

Prime II



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC328SS-ADF28(40)K-I1

LightHunter
1/2.8"/8MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 97.49°/88.39°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10



IPC3618SS-ADF28(40)K-I1

LightHunter
1/3.0"/4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 97.49°/88.35°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
Built-in Mic
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2B18SS-ADF28(40)K-I1

LightHunter
1/2.8"/8MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.6 Angle of view (H): 100.15°/87.5°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 80 m (262 ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC2B18SS-ADF28(40)KMC-I1

ColorHunter
1/2.8"/8MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.0 Angle of view (H): 106.5°/92.0°
Fixed
Colour:0.001 lux (F1.0, AGC ON) 0 lux with IR
IR 40 m, Warm Light 40 m
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1(Built-in Mic and Speaker)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3638SS-ADF28K-I1

LightHunter
1/2.8"/8MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm Iris: F1.6 Angle of view (H): 97.49°
Fixed
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40 m (131.2 ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1(Built-in Mic)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A



IPC3638SS-ADF28(40)KMC-I1

ColorHunter
1/2.8"/8MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.0 Angle of view (H): 106.5°/92.0°
Fixed
Colour: 0.001 lux (F1.0, AGC ON) 0 lux with IR
IR 30 m, Warm Light 30 m
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1(Built-in Mic and Speaker)
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2B14SE-ADF28(40)K-WP-I1

ColorHunter
1/1.8" /4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.0 Angle of view (H): 100.4°/88.2°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
N/A
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 /1,Built-in Mic
1 /1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC3634SE-ADF28(40)K-WP-I1**

ColorHunter
1/1.8" /4MP/CMOS
130dB True WDR
Fixed
Focus: 2.8mm, 4mm Iris: F1.0 Angle of view (H): 100.4°/88.2°
Fixed
Colour: 0.0003 lux (F1.0, AGC ON)
N/A
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 /1,Built-in Mic
1 /1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3K28SE-ADF28KMC-DL-I0

ColorHunter
1/2.7" /8MP/CMOS
130dB True WDR
Fixed
Focus: 2 * 2.8mm Iris: F1.0 Angle of view (H): 180.00°±10°
Fixed
Color: 0.0005Lux (F1.0, AGC ON) 0Lux with IR
IR 40m, Warm Light 40m
Ultra 265,H.265, H.264,MJPEG
✓
4096*1860 20fps
1 /1,Built-in speaker and two mics
1 /1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC2A24SE-ADZK-I0**

LightHunter
1/1.8" /4MP/CMOS
120dB True WDR
Motorized
Focus: 2.8-12.0mm Iris: F1.2 Angle of view (H): 42.6°~113.7°
Fixed
Color: 0.0005Lux (F1.2, AGC ON) 0Lux with IR
Up to 80m (98ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 /1,Built-in Mic
2 /1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2K24SE-ADF40KMC-WL-I0

ColorHunter
1/2.0" /4MP/CMOS
DWDR
Fixed
Focus: 2 * 4.0mm Iris: F1.0 Angle of view (H): 160.00°±10°
Fixed
Color: 0.0005Lux (F1.0, AGC ON)
N/A
Ultra 265,H.265, H.264,MJPEG
✓
3840*1080 25fps
1 / 1,Built-in speaker and two mics
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC2K28SE-ADF40KMC-WL-I0**

ColorHunter
1/2.7" /8MP/CMOS
130dB True WDR
Fixed
Focus: 2 * 4.0mm Iris: F1.0 Angle of view (H): 180.00°±10°
Fixed
Color: 0.0005Lux (F1.0, AGC ON)
N/A
Ultra 265,H.265, H.264,MJPEG
✓
5120*1440 20fps
1 / 1,Built-in speaker and two mics
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
N/A

**IPC3734SE-ADZK-I0**

LightHunter
1/1.8" /4MP/CMOS
120dB True WDR
Motorized
Focus: 2.8-12.0mm Iris: F1.2 Angle of view (H): 42.6°~113.7°
Fixed
Color: 0.005Lux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 /1,Built-in Mic
2 /1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC3634SE-ADZK-I0**

LightHunter
1/1.8" /4MP/CMOS
120dB True WDR
Motorized
Focus: 2.8-12.0mm Iris: F1.2 Angle of view (H): 42.6°~113.7°
Fixed
Color: 0.0005Lux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
2688*1520 30fps
1 /1,Built-in Mic
2 /1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Iris
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC2B18SE-ADF28(40)K-WP-I1

ColorHunter
1/1.2"/8MP/CMOS
130dB True WDR
Fixed
Fixed
N/A
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1,Built-in Mic
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC3638SE-ADF28(40)K-WP-I1**

ColorHunter
1/1.2"/8MP/CMOS
130dB True WDR
Fixed
Fixed
N/A
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1,Built-in Mic
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

LightHunter
1/1.8"/4MP/CMOS
120dB True WDR
Motorized
Focus:2.8~12.0mm Iris: F1.2 Angle of view (H): 48.0°~101.1°
Fixed
Color: 0.008ux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1(Built-in Mic)
2 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

IPC3638SE-ADZK-I0

LightHunter
1/1.8"/4MP/CMOS
120dB True WDR
Motorized
Focus:2.8~12.0mm Iris: F1.2 Angle of view (H): 48.0°~101.1°
Fixed
Color: 0.008ux (F1.2, AGC ON) 0Lux with IR
Up to 40m (131ft)
Ultra 265,H.265, H.264,MJPEG
✓
3840*2160 30fps
1 / 1(Built-in Mic)
2 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

**IPC542SE-HDK-I0**

LightHunter
1/2.8"/2MP/CMOS
120dB True WDR
Manual(No Zoom/focus interface)
N/A
DC-Iris/P-Iris
Color: 0.0005Lux (F1.2, AGC ON) B/W:0.0001Lux(F1.2, AGC ON)
N/A
Ultra 265, H.265, H.264, MJPEG
✓
1920*1080 60fps
1 / 1
2 / 1
✓
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
AC 24V ±25%, DC 12V ±25% PoE (IEEE802.3af)
N/A
N/A

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC264SA-AHDX4K-I1

LightHunter
1/1.8"/4MP/CMOS
130dB True WDR
Motorized
Focus:8~32mm Iris:F1.6 Angle of view(H):42.6°~15.2°
P-iris
Colour: 0.001lux (F1.6, AGC ON) 0 lux with IR
120 m (393.7 ft)
Ultra265,H.265,H.264,MJPEG
✓
2688×1520 60fps
2 / 1,Built-in 2 Mics
3 / 2
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE+ (IEEE 802.3at)
IP67
IK10

**IPC2B22SA-AHDZK-PI-I1**

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Motorized
2.7 to 13.5mm
P-iris
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
60 m (196.9 ft)
Ultra265,H.265,H.264,MJPEG
✓
1920×1080 60fps
1 / 1,Built-in 2 Mics
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE+ (IEEE 802.3at)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3234SA-AHDZK-PI-I1

LightHunter
1/2.9"/4MP/CMOS
130dB True WDR
Motorized
2.7 to 13.5mm
P-iris
Colour: 0.003 lux (F1.6, AGC ON) 0 lux with IR
Up to 40m(131 ft)
Ultra265,H.265,H.264,MJPEG
✓
2688×1520 60fps
1 / 1,Built-in 2 Mics
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE+ (IEEE 802.3at)
IP67
IK10

**Appearance**

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC3232SA-AHDZK-PI-I1

LightHunter
1/2.8"/2MP/CMOS
130dB True WDR
Motorized
2.7 to 13.5mm
P-iris
Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR
Up to 40m(131 ft)
Ultra265,H.265,H.264,MJPEG
✓
1920×1080 60fps
1 / 1,Built-in 2 Mics
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE+ (IEEE 802.3at)
IP67
IK10

**IPC2B24SA-AHDZK-PI-I1**

LightHunter
1/2.9"/4MP/CMOS
130dB True WDR
Motorized
2.7 to 13.5mm
P-iris
Colour: 0.003 lux (F1.6, AGC ON) 0 lux with IR
60 m (196.9 ft)
Ultra265,H.265,H.264,MJPEG
✓
2688×1520 60fps
1 / 1,Built-in 2 Mics
1 / 1
N/A
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE+ (IEEE 802.3at)
IP67
IK10



Network Camera

Pro Series

The UNV Pro series is designed with advanced ultra-smart technology to deliver a superior user experience.

Equipped with smart functions, products in the Pro series can adapt to a range of challenging situations. With features like 4K@30fps, 2MP@60fps, LightHunter, WDR, and abundant interfaces, the Pro series also includes the OmniView camera, which combines multiple sensors to provide a panoramic view.

Additionally, AlphaView is a series of cameras with built-in deep learning algorithms. It focuses accurately on people and vehicles in an image, allowing users to concentrate on real events.

Pro series products are the top choice for enterprise and project applications.

High Reliability



Wide temperature & voltage

Extreme operation temperature test for all outdoor products, -40 C ~60 C.



Reliable protection level

Protects the products reliably even when the power supply is unstable.



Provide the most reliable protection for the product.



Surging prevention

Provides up to 6KV surge protection to ensure the safety of outdoor products.


Industry products will be used in various complex environments, and UNV products have the ability to operate stably in complex environments.

IPC264EA Series & IPC3234EA Series

- 1/1.8" CMOS
- 140dB WDR
- P-iris
- 4MP@60fps, 8MP@60fps
- Wise-ISP
- IP67 & IK10

AlphaView

It focuses on people and vehicles with high precision.

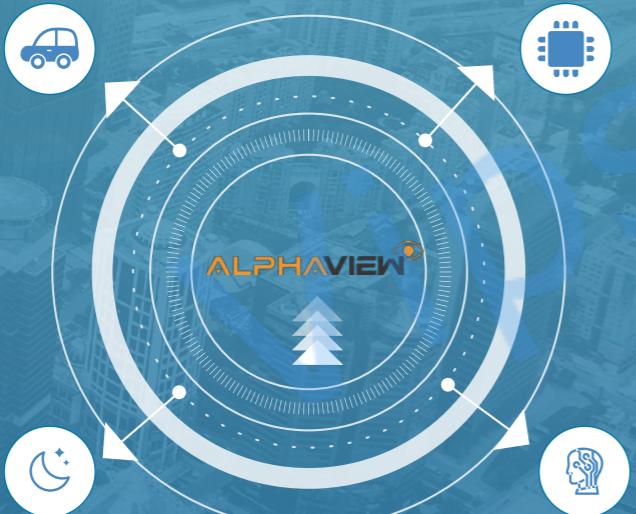


4MP@60fps or 8MP@30fps
equipped with LightHunter
technology.



Wise-ISP

5th-generation night view technology developed by Uniview. Supported by the smart algorithm, it captures intricate details and accurately represents colors.

Wise-ISP Advantages

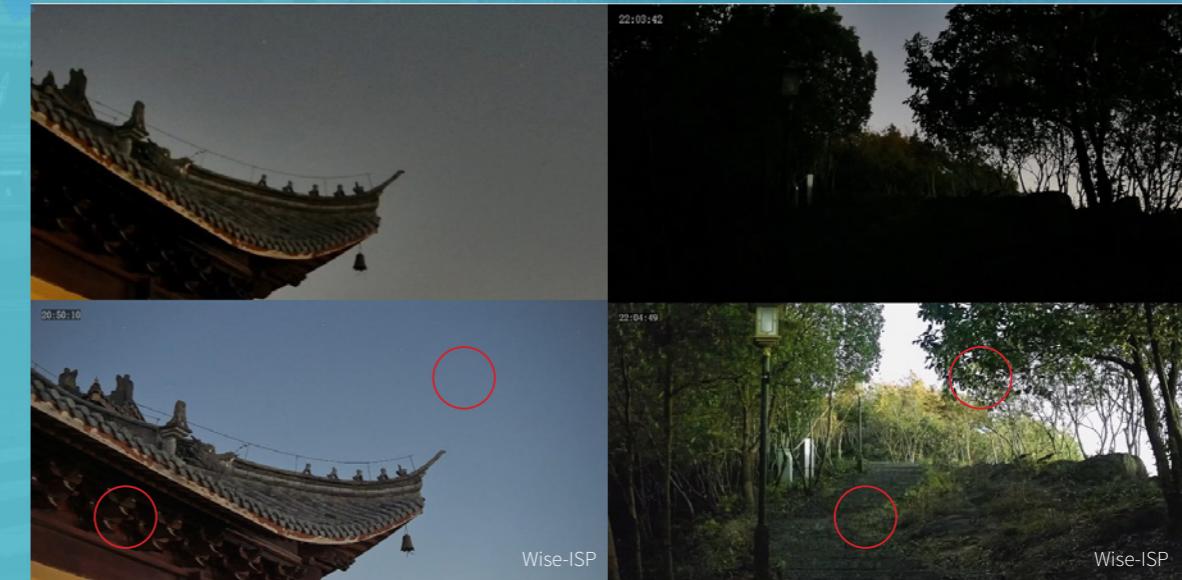

Better restore true color

Better restore true color

Multi-channel with Single IP



4 channels with one IP



Independent VCA



Independent image
adjustment

Longer Focus & Aperture

13.5mm ultra-long focal length, F1.2 ultra-large aperture, delivers clearer and brighter images

FOV: Horizontal: 102.9°, Vertical: 51.07°

IPC8645EA-ADZKM-I1

- 1/2.7" CMOS
- 130dB WDR
- P-iris
- 5MP@30fps
- Wise-ISP
- IP67 & IK10



PRO Basic



IPC262EB-HDX10K-I0

Low illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus: 5-50mm Iris: F1.6 Angle of view(H): 4.71°~55.87°
Iris	DC-Iris
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0 lux with IR
IR	Up to 100m(328.1 ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	1920×1080 60fps
9:16 Corridor Mode	✓
Audio I/O	1/1
Alarm I/O	2/1
BNC	✓
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC12V(±25%) PoE+ (IEEE802.3at) [AC24V(±25%) Customization available]
Ingress Protection	IP67
Vandal Resistant	IK10



IPC265EB-DX12K-I0

Light illumination characteristics	LightHunter
Sensor	1/2.8"/2MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus: 5-60mm Iris: F1.6 Angle of view(H): 4.71°~55.87°
Iris	DC-Iris
Min. illumination	Color: 0.002Lux (F1.6, AGC ON) 0 lux with IR
IR	Up to 100m(328.1 ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2880×1620 30fps
9:16 Corridor Mode	✓
Audio I/O	1/1
Alarm I/O	2/1
BNC	✓
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M Base-TX Ethernet
Power	DC12V(±25%) PoE+ (IEEE802.3at) [AC24V(±25%) Customization available]
Ingress Protection	IP67
Vandal Resistant	IK10



IPC254EB-DX22GK-I0

Low illumination characteristics	LightHunter
Sensor	1/1.8"/4MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Motorized
Lens	Focus: 6.5-143mm Iris: F1.5~F3.4 Angle of view(H): 60.47°~3.49°
Iris	DC-iris
Min. illumination	Color: 0.001Lux (F1.5, AGC ON) 0 lux with IR
IR	Up to 150m(492.1 ft)
Video Compression	Ultra 265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688×1520 30fps
9:16 Corridor Mode	N/A
Audio I/O	1/1
Alarm I/O	2/1
BNC	✓
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M/1000M Base-TX Ethernet +100M/1000M SFP
Power	AC 24V ±25%, PoE (IEEE 802.3at)
Ingress Protection	IP67
Vandal Resistant	N/A



IPC568EB-DGK-I0

Light illumination characteristics	LightHunter
Sensor	1/1.8"/8MP/CMOS
Wide Dynamic Range	120dB True WDR
Zoom	N/A
Lens	P-Iris/DC- Iris
Iris	Colour: TBD (F1.2, AGC ON) B/W: TBD (F1.2, AGC ON)
Min. illumination	N/A
IR	Ultra 265, H.265, H.264, MJPEG
Video Compression	✓
Smart Function	3840x2160 30fps
Frame Rate	×
9:16 Corridor Mode	1/1
Audio I/O	2/1
Alarm I/O	✓
BNC	MicroSD, up to 512GB
Edge Storage	10M/100M Base-TX Ethernet
Network Interface	AC 24V ±25%, DC 12V±25%, PoE (IEEE 802.3af)
Power	N/A
Ingress Protection	N/A
Vandal Resistant	N/A

PRO Basic



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Iris
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
9:16 Corridor Mode
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC86CEB-AF18KC-I0

Low-light
1/1.7"/12MP/CMOS
DWDR
Fixed
Focus: 1.8mm Iris: F2.0 Angle of view : 360°
Fixed
Colour: 0.03Lux (F2.0, AGC ON) 0Lux with IR
Up to 15m (49ft)
Ultra 265, H.265, H.264, MJPEG
✓
Fisheye View: 4000*3000 20fps 3000*3000 20fps 2560*2560 25fps
N/A
1 / 1 (Built-in two Mics)
2 / 1
✓
MicroSD, up to 512GB
10M/100M Base-TX Ethernet
DC 12V ±25% PoE (IEEE 802.3af)
IP67
IK10

PRO AlphaView



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC264EA-AHDZK-I1

Detail
LightHunter
1/1.8", 8MP, CMOS
120dB True WDR
5X
Focus:10~50mm Iris:F1.6 Angle of view(H):33.8°~8.4°
Colour:0.005lux (F1.6, AGC ON) 0 lux with IR
Up to 50m (164.0ft) IR range
Ultra265,H.265,H.264,MJPEG
✓
3840*2160 30fps
2/1
3/2
N/A
Micro SD, up to 512 GB
10M/100M/1000M Base-TX Ethernet
AC24V±25%

Panorama

LightHunter
1/1.8", 4MP, CMOS
120dB True WDR
N/A
Focus:4mm Iris:F1.0 Angle of view(H):94.7°
Colour:0.0005lux (F1.0, AGC ON)
N/A
Ultra265,H.265,H.264,MJPEG
N/A
2688*1520 30fps
2/1
3/2
N/A
Micro SD, up to 512 GB
10M/100M/1000M Base-TX Ethernet
AC24V±25%

PRO AlphaView



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC264EA-AHDZK-I1

Lighthunter
1/1.8"/4MP/CMOS
140dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.2 Angle of view: 106.5°~51.3°
Colour:0.0003 lux (F1.2, AGC ON) 0 lux with IR
Up to 100m (328ft)
Ultra265,H.265,H.264,MJPEG
✓
2688×1520 60fps 1920×1080 60fps
2 / 1
3 / 2
N/A
Micro SD, up to 512 GB
10M/100M/1000M Base-TX Ethernet
DC12V(±25%) , PoE+ (IEEE 802.3af)
IP67
IK10



IPC264EA-AHDZK-I1

Lighthunter
1/1.8"/4MP/CMOS
140dB True WDR
Motorized
Focus: 8~32mm Iris: F1.6 Angle of view: 42.6°~15.2°
Color: 0.005Lux (F1.6, AGC ON) 0Lux with IR
Up to 100m (328ft)
Ultra265,H.265,H.264,MJPEG
✓
2688×1520 60fps 1920×1080 60fps
2 / 1
3 / 2
N/A
Micro SD, up to 512 GB
10M/100M/1000M Base-TX Ethernet
DC12V(±25%) , PoE+ (IEEE 802.3at)
IP67
IK10



Appearance

Low illumination characteristics
Sensor
Wide Dynamic Range
Zoom
Lens
Min. illumination
IR
Video Compression
Smart Function
Frame Rate
Audio I/O
Alarm I/O
BNC
Edge Storage
Network Interface
Power
Ingress Protection
Vandal Resistant

IPC268EA-AHDZK-I1

Lighthunter
1/1.8"/8MP/CMOS
140dB True WDR
Motorized
Focus: 2.8~12mm Iris: F1.2 Angle of view: 102.5°~ 48.5°
Color: 0.001lux (F1.2, AGC ON) 0Lux with IR
Up to 60 m (196.9 ft)
Ultra265,H.265,H.264,MJPEG
✓
3840×2160 60fps 1920×1080 60fps
2 / 1
3 / 2
N/A
Micro SD, up to 512 GB
10M/100M/1000M Base-TX Ethernet
DC12V(±25%) , PoE+ (IEEE 802.3af)
IP67
IK10



IPC268EA-AHDZK-I1

Lighthunter
1/1.8"/8MP/CMOS
140dB True WDR
Motorized
Focus: 8~32mm Iris: F1.6 Angle of view: 42°~15.3°
Color: 0.003 lux (F1.6, AGC ON) 0 lux with IR
Up to 120 m (393.7 ft)
Ultra265,H.265,H.264,MJPEG
✓
3840×2160 60fps 1920×1080 60fps
2 / 1
3 / 2
N/A
Micro SD, up to 512 GB
10M/100M/1000M Base-TX Ethernet
DC12V(±25%) , PoE+ (IEEE 802.3at)
IP67
IK10

PRO AlphaView



Appearance

Low illumination characteristics	Lighthunter
Sensor	1/1.8" 4MP CMOS
Wide Dynamic Range	140dB True WDR
Zoom	Motorized
Lens	Focus: 2.8~12mm Iris: F1.2 Angle of view: 106.6°~51.3°
Min. illumination	Colour: 0.0003 lux (F1.2, AGC ON) 0 lux with IR
IR	Up to 40m (131 ft)
Video Compression	Ultra265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688×1520 60fps 1920×1080 60fps
Audio I/O	2 / 1
Alarm I/O	3 / 2
BNC	N/A
Edge Storage	Micro SD, up to 512 GB
Network Interface	10M/100M/1000M Base-TX Ethernet
Power	DC12V(±25%), PoE+ (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

IPC3234EA-AHDZK-I1



IPC3234EA-AHDZK-I1

Low illumination characteristics	Lighthunter
Sensor	1/1.8" 4MP CMOS
Wide Dynamic Range	140dB True WDR
Zoom	Motorized
Lens	Focus: 8~32mm Iris: F1.2 Angle of view: 42.6°~15.2°
Min. illumination	Colour: 0.0005 lux (F1.2, AGC ON) 0 lux with IR
IR	Up to 40m (131 ft)
Video Compression	Ultra265, H.265, H.264, MJPEG
Smart Function	✓
Frame Rate	2688×1520 60fps 1920×1080 60fps
Audio I/O	2 / 1
Alarm I/O	3 / 2
BNC	N/A
Edge Storage	Micro SD, up to 512 GB
Network Interface	10M/100M/1000M Base-TX Ethernet
Power	DC12V(±25%), PoE+ (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10

PRO AlphaView



Appearance

Low illumination characteristics	LightHunter(0.002lux)
Sensor	1/1.8" 4*4MP CMOS
Wide Dynamic Range	120dB True WDR
Zoom	Fixed
Lens	Focus: 2.8mm Iris: F1.6 Angle of view (H): 180° Angle of view (V): 80°
Min. illumination	Color: 0.001Lux (F1.6, AGC ON) 0Lux with IR
IR	Up to 50m (164ft)
Video Compression	Ultra265, H.264, MJPEG
Smart Function	✓
Frame Rate	4800×2688 30fps 3840×2160 30fps 2688×1520 30fps
Audio I/O	1 / 1
Alarm I/O	2 / 1
BNC	N/A
Edge Storage	MicroSD, up to 512GB
Network Interface	10M/100M/1000M Base-TX Ethernet
Power	AC 24V ±25%, DC24V Support 18~48V PoE (IEEE 802.3at)
Ingress Protection	IP67
Vandal Resistant	N/A

IPC8544EA-KM-I1



Appearance

Low illumination characteristics	LightHunter
Sensor	1/2.7" 4*5MP CMOS
Wide Dynamic Range	130dB True WDR
Zoom	Motorized
Lens	Focus: 2.7~13.5mm Iris: F1.2 (W)110.3°~(T)31°
Min. illumination	Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR on
IR	Up to 50m (164ft)
Video Compression	Ultra265, H.264, MJPEG
Smart Function	✓
Frame Rate	2880×1620 30fps 1080P 30fps
Audio I/O	1 / 1
Alarm I/O	3 / 2
BNC	N/A
Edge Storage	Micro SD, up to 512 GB
Network Interface	10M/100M/1000M Base-TX Ethernet
Power	AC 24V ±25%, DC24V ±25% PoE (IEEE 802.3at)
Ingress Protection	IP67
Vandal Resistant	IK10

IPC8645EA-ADZKM-I1