


# UNIVIEW

PRODUCT GUIDE 2024

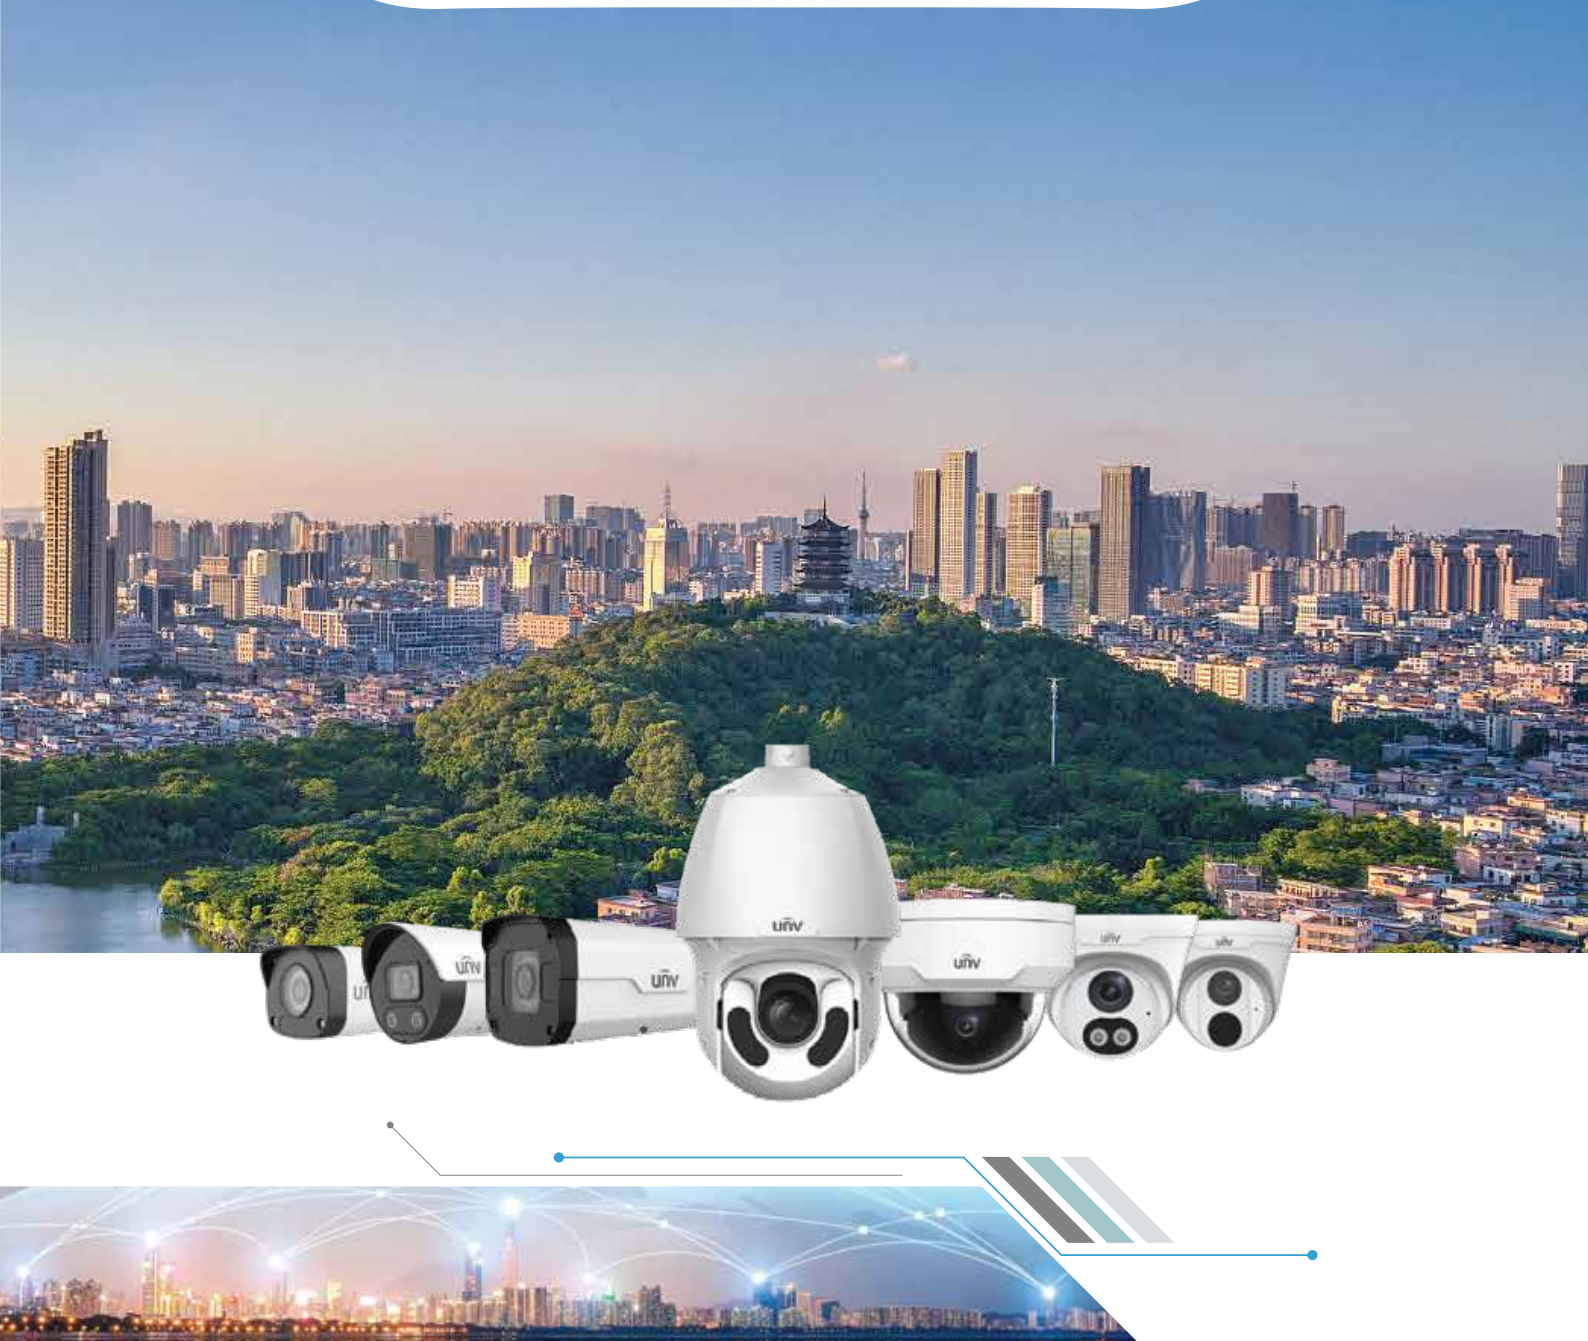

## ABOUT US

# Unlimited New View

With 16 years of unlimited exploration, Uniview evolves from video surveillance to AIoT, taking Big data, Cloud and IoT technology as the core: the video surveillance product lines include IP cameras, NVR, Encoder, Decoder, Storage, Client Software and app, the AIoT ranges from display, intelligent access control to smart office and smart home. With the pragmatic attitude and continuous innovation, from 2011 to 2021, Uniview achieved 20 times revenue growth, from 300 million to 6.07 billion.

Uniview provides professional solutions covering all industries, delivered more than 7000 cases in transportation, industrial park, commercial, bank, residential, school, healthcare etc.

Uniview endeavor to build a safer world based on professionalism and reliability

## In-depth Global Coverage




Set up **18** international branches,  
covering more than **200** countries and regions

- Sale representatives & marketing employees spread out worldwide
- Channels cover wide selection of countries & cities
- Local teams are rooted into domestic markets

# Rising With Solid Foundation

## Pioneering R&D capacity

Univ's research and development expenditure amounted to over 10% of revenue in its 2021 fiscal year, ranks second video surveillance companies worldwide in terms of R&D spend.

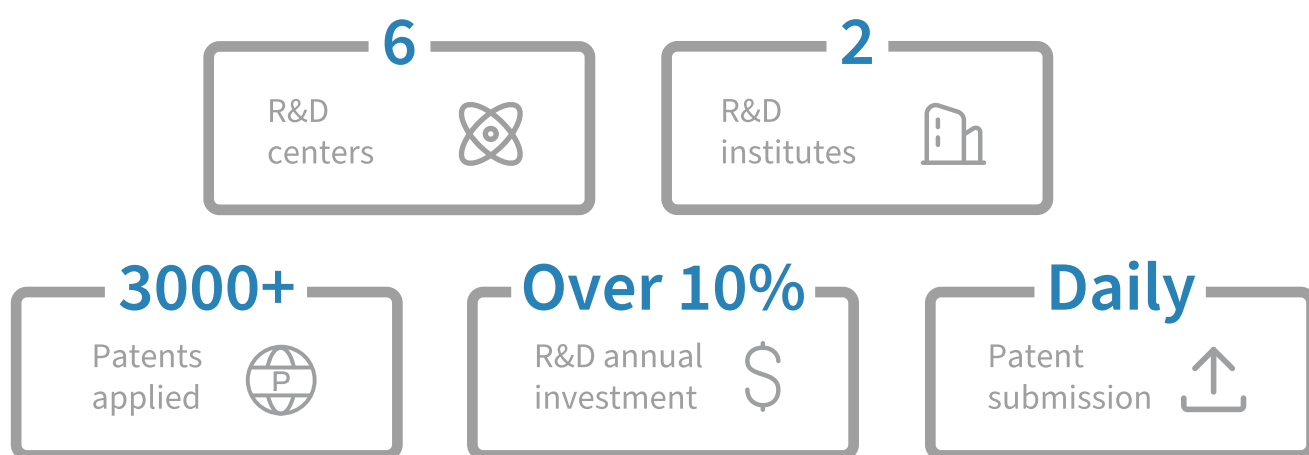

## CERTIFICATIONS

### Safety & EMC & ERP



### Industry

CMMI5 Erp UL 2802  
 EN50155  
 ITS Certifications from  
 China Public Security

### Environment



### Security



### Reliability

IP  
 IK  
 NEMA 4X  
 UL 50E

### System Certification

ISO 9001 OHSAS 18001  
 ISO 14001 ISO 20000-1  
 ISO 27001

## ENTRY LEVEL FIXED LENS SERIES

2MP



IPC2122LB-SF40-A

- 2MP (1920\*1080)@30/25fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67
- 3-Axis



IPC322LB-SF28-A

- 2MP (1920\*1080)@30/25fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 / IK10
- 2-Axis

2MP



IPC3612LB-SF28-A

- 2MP (1920\*1080)@30/25fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67
- 3-Axis



IPC2122LB-ADF40KM-G

- 2MP (1920\*1080)@30/25fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card

2MP



IPC322LB-DSF28K-G

- 2MP (1920\*1080)@30/25fps
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- IP67/IK10



IPC3612LB-ADF28K-G

- 2MP (1920\*1080)@30/25fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- 2D/3D DNR (Digital Noise Reduction)
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Supports 128 G Micro SD card
- IP67 protection

2MP/3MP



C1L-2WN-G

- 2MP(1920\*1080)@30fps
- 2.8mm fixed lens
- Support Wi-Fi / RJ45
- Smart IR, up to 10m (32ft)
- Ultra 265, H.265, H.264, MJPEG
- Built-in Mic & speaker
- Micro SD, up to 128 GB
- Power supply DC 5V+ 10%



IPC3613LR3-APF28K-F

- 3MP (2304\*1296)@20fps
- 2.8mm fixed lens
- Smart IR, up to 30m (98ft)
- 2D/3D DNR (Digital Noise Reduction)
- Ultra 265, H.265, H.264
- Built-in Mic
- Micro SD, up to 128 GB
- IP67

3MP/4MP



IPC2A23LB-F40(60)K-A

- 3MP (2304\*1296)@20fps
- 4mm/6mm fixed lens
- Smart IR, up to 60m (196ft)
- 2D/3D DNR (Digital Noise Reduction)
- Ultra 265, H.265, H.264
- Micro SD, up to 128 GB
- IP67



IPC2124LB-SF40-A

- 4MP (2560\*1440)@25/20fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67
- 3-Axis



4MP



IPC3614LB-SF28-A

- 4MP (2560\*1440)@25/20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67
- 3-Axis



IPC324LB-SF28K-G

- 4MP (2560\*1440)@25/20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Supports 128 G Micro SD card
- IP67 / IK10
- 3-Axis

4MP



IPC2124LB-SF40KM-G

- 4MP (2560\*1440)@25/20fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Supports 128 G Micro SD card
- IP67
- 3-Axis



IPC3614LB-SF28K-G

- 4MP (2560\*1440)@25/20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Supports 128 G Micro SD card
- IP67
- 3-Axis

4MP



IPC3614LE-ADF28K-G

- 4MP (2688\*1520)@25/20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- Smart functions: Human body detection
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- Supports 256G Micro SD card
- IP67



IPC2124LE-ADF40KM-G

- 4MP (2688\*1520)@25/20fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 50m (164ft) IR distance
- Day/night functionality
- Smart functions: Human body detection
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- Supports 256G Micro SD card
- IP67

5MP



IPC2125LE-ADF28KM-G

- Easystar 5MP (2880\*1620)@ 25/20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 50m (164ft)
- Supports 256 G Micro SD card
- IP67 protection



IPC3615LE-ADF28K-G

- Easystar 5MP (2880\*1620)@ 25/20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 30m (98ft)
- Supports 256 G Micro SD card
- IP67 protection

8MP



IPC2128LE-ADF28KM-G

- Easystar 8MP (3840\*2160)@ 20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 50m (164ft)
- Supports 256 G Micro SD card
- IP67 protection



IPC3618LE-ADF28K-G

- Easystar 8MP (3840\*2160)@ 20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 30m (98ft)
- Supports 256 G Micro SD card
- IP67 protection

2MP



IPC2122LE-ADF40KMC-WL

- 2MP (1920\*1080) @30/25fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft)
- White Light, up to 30m (98ft)
- Supports 128G Micro SD card
- IP67 protection



IPC3612LE-ADF28KC-WL

- 2MP (1920\*1080) @30/25fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft)
- White Light, up to 30m (98ft)
- Supports 128 G Micro SD card
- IP67 protection

4MP



IPC2124LE-ADF40KMC-WL

- 4MP (2688\*1520)@ 25/20fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft)
- White Light, up to 30m (98ft)
- Supports 128 G Micro SD card
- IP67 protection



IPC3614LE-ADF28KMC-WL

- 4MP (2688\*1520)@ 25/20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft)
- White Light, up to 30m (98ft)
- Supports 128 G Micro SD card
- IP67 protection

## ENTRY LEVEL VARIFOCAL LENS SERIES

2MP



IPC2322LB-ADZK-G

- 2MP (1920\*1080)@30/25fps;
- 2.8mm-12mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 50m (164ft) IR distance
- Supports 128 G Micro SD card
- IP67



IPC3532LB-ADZK-G

- 2MP (1920\*1080)@30/25fps;
- 2.8mm-12mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 40m (131ft)
- Supports 128 G Micro SD card
- IP67/ IK10

4MP



IPC2324LB-ADZK-G

- 4MP (2688\*1520)@25/20fps;
- 2.8mm-12mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 50m (164ft) IR distance
- Supports 256G Micro SD card
- IP67



IPC3534LB-ADZK-G

- 4MP (2688\*1520)@25/20fps;
- 2.8mm-12mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Support 9:16 Corridor Mode
- Smart functions: Human body detection
- Built-in Mic
- Smart IR, up to 40m (131ft)
- Supports 256G Micro SD card
- IP67/ IK10

## PRIME SERIES FIXED LENS

2MP



IPC312SB-ADF28K-I0

- 2mp (1920\*1080)@30/25fps
- 2.8mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- VCA Smart Functions
- Triple streams
- 9:16 corridor format
- Built-in Mic
- Supports 256GB Micro SD card
- IP67 / IK10



IPC2122SB-ADF40KM-I0

- 2mp (1920\*1080)@30/25fps
- 4mm fixed lens
- Smart IR, up to 40m (131ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- VCA Smart Functions
- Triple streams
- 9:16 corridor format
- Built-in Mic
- Supports 256G Micro SD card
- IP67

4MP



IPC2124SR3-ADPF40M-F

- 4mp (2592\*1520)@30fps
- 4mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Triple streams
- Built-in Mic
- Supports 256G Micro SD card
- IP67



IPC3614SR3-ADPF28-F

- 4mp (2592\*1520)@30fps
- 2.8mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Triple streams
- Built-in Mic
- Supports 256G Micro SD card
- IP67

4MP



IPC324ER3-DVPF28

- 4mp (2592\*1520)@30fps
- 2.8mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- VCA Smart Functions
- Triple streams
- 9:16 corridor format
- Audio I/O, Alarm I/O
- Supports 256G Micro SD card
- IP67 / IK10



IPC314SB-ADF28k10

- 4mp (2688\*1520)@ 30/25fps
- 2.8mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- VCA Smart Functions
- Triple streams
- 9:16 corridor format
- Built-in Mic
- Supports 256GB Micro SD card
- IP67 / IK10

5MP



IPC2125SS-ADF40KM-I0

- 5mp (2592\*1944)@20fps
- 4mm fixed lens
- Smart IR, up to 40m (131ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Triple streams
- VCA Smart Functions
- 9:16 corridor format
- Built-in Mic
- Supports 256G Micro SD card
- IP67



IPC325SB-DF28K-I0

- 5mp (2880\*1620)@30fps
- 2.8mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Triple streams
- VCA Smart Functions
- 9:16 corridor format
- Audio I/O, Alarm I/O
- Supports 256G Micro SD card
- IP67 / IK10

5MP



IPC2125SR3-ADPF40M-F

- 5mp (2592\*1944)@20fps
- 4mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Triple streams
- VCA Smart Functions
- 9:16 corridor format
- Built-in Mic
- Supports 256G Micro SD card
- IP67



IPC3615SS-ADF28KM-I0

- 5mp (2880\*1620)@30fps
- 2.8mm fixed lens
- Smart IR, up to 30m (98ft)
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR
- Triple streams
- VCA Smart Functions
- 9:16 corridor format
- Built-in Mic
- Supports 256G Micro SD card
- IP67

## PRIME SERIES VERY FOCAL LENS

2MP



IPC2322SB-DZK-I0

- 2mp (1920\*1080)@30/25fps
- 2.7mm-13.5mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter area, leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10



IPC3232SA-DZK

- 2mp (1920\*1080)@30/25fps
- 2.8mm-13.5mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter area, leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 40m (131ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10

4MP



IPC2324SB-DZK-I0

- 4MP (2688\*1520)@30fps;
- 2.7mm-13.5mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter area, leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10



IPC3234SB-ADZK-I0

- 4MP (2688\*1520)@30fps;
- 2.7mm-13.5mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter / leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Build in Mic, Audio: 1 in/1 out
- Alarm:1 in/1 out,
- Smart IR, up to 40m (131ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10

5MP



IPC2325SB-DZK-I0

- 5MP (2880\*1620)@ 30/25fps;
- 2.7mm-13.5mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter area, leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10



IPC3235SB-ADZK-I0

- 5MP (2880\*1620)@ 30/25fps;
- 2.7mm-13.5mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter / leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Build in Mic, Audio: 1 in/1 out
- Alarm:1 in/1 out,
- Smart IR, up to 40m (131ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10

8MP



IPC2328SB-DZK-I0

- 8MP (3840\*2160)@ 20fps;
- 2.8mm-12mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter area, leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10



IPC3238SB-ADZK-I0

- 8MP (3840\*2160)@ 20fps;
- 2.8mm-12mm motorized varifocal lens
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, crossline, intrusion, enter / leave area detection
- Based on target classification, smart intrusion, Intelligent People Flow Counting and Crowd Density Monitoring
- 120dB true WDR
- Support 9:16 Corridor Mode
- Build in Mic, Audio: 1 in/1 out
- Alarm:1 in/1 out,
- Smart IR, up to 40m (131ft) IR distance
- Supports 256 G Micro SD card
- IP67 / IK10



## PRIME SERIES FISHEYE CAMERA

5MP/12MP



IPC815SB-ADF14K-I0

- 5MP (2592\*1944):@ 30/25fps;
- 1.4mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 360° Fish Eye Camera
- 120dB true WDR
- Built-in 2 Mic
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 10m (33ft) IR distance
- Supports 256 G Micro SD card
- IP66 / IK10



IPC868CEB-AF18KC-I0

- 12MP (4000\*3000):@15fps;
- 1.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- 360° Fish Eye Camera
- 120dB true WDR
- Built-in microphone & speaker
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 10m (33ft) IR distance
- Supports 256 G Micro SD card
- IP66 / IK10

## PRIME SERIES DUAL LENS CAMERA

4MP + 4MP



IPC2K24SE-ADF40KMC-WL-I0

- 4MP (3840\*1080)@25fps; 4MP (3840\*1080)@20fps
- High quality image with 4MP, 1/2.9"CMOS sensor
- The double lens splicing technology is adopted to realize the horizontal viewing angle of 160.00°±10°
- Ultra 265, H.265, H.264, MJPEG
- Support Human Body Detection
- Colorhunter technology ensures 24-hour full-color images
- Alarm:1 in/1 out ; Audio: 1 in/1 out
- Built-in speaker and dual mics
- Support 256 GB micro SD card
- 12V DC/PoE power supply

8MP + 8 MP



IPC2K28SE-ADF40KMC-WL-I0

- 8MP (5120\*1440)@20fps, 8MP (5120\*1440)@20fps
- High quality image with 8MP, 1/2.7"CMOS sensor
- The double lens splicing technology is adopted to realize the horizontal viewing angle of 180.00°±10°
- Colorhunter technology ensures 24-hour full-color images
- Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds and lights etc., accurately focus on human and, motor vehicle and non-motor vehicle
- Intelligent People Flow Counting and Crowd Density Monitoring
- Auto Scene Match (ASM) (Only WDR)
- Alarm:1 in/1 out ; Audio: 1 in/1 out
- Built-in speaker and dual mics
- Support 256 GB micro SD card
- 12V DC/PoE power supply

## PTZ DOME EASY SERIES

2MP



IPC672LR-AX4DUWK

- 2MP:1080P 1920\*1080@30 fps
- 2.8mm-12mm AF & motorized lens
- LightHunter illumination
- Ultra 265,H.265, H.264, MJPEG
- 4X optical zoom
- Up to 50 m (164 ft) IR and 10m (33 ft) warm light distance
- Micro SD up to 128G
- Built-in microphone & speaker
- Triple streams
- ONVIF
- IP66



IPC6412LR-X16-VG

- 2MP 1920\*1080@30fps
- 5mm-80mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- 16 X optical zoom
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR
- Micro SD, up to 256GB
- Smart IR, up to 100m (328 ft)
- DC 12V±25% or PoE+ (IEEE 802.3at)
- IP66 ingress protection

2MP



IPC6612SR-X25-VG

- 2MP 1920\*1080@30fps
- 5mm-125mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- 25X optical zoom
- Smart intrusion prevention, support false alarm filtering, Cross Line, Intrusion, Enter Area, Leave Area detection
- Up to 120 dB Optical WDR
- Audio 1 in and 1 out, Alarm 2 in and 1 out
- Micro SD, up to 256GB
- Smart IR, up to 150m (492 ft)
- IP66 ingress protection



IPC6612SR-X33-VG

- 2MP 1920\*1080@30fps
- 4.5mm-148.5mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- 33X optical zoom
- Smart intrusion prevention, support false alarm filtering, Cross Line, Intrusion, Enter Area, Leave Area detection
- Up to 120 dB Optical WDR
- Audio 1 in and 1 out, Alarm 2 in and 1 out
- Micro SD, up to 256GB
- Smart IR, up to 150m (492 ft)
- IP66 ingress protection

4MP



IPC94144SFW-X25-F40C

- 4MP 2688\*1520@30fps
- Fixed camera(4mm lens) and PTZ (4.8-128mm lens) camera integration, dual channels with one IP
- Ultra 265, H.265, H.264, MJPEG
- 25X optical zoom
- SIP, false alarm filtering, Cross Line, Intrusion, Enter Area, Leave Area
- People Counting, people flow counting and crowd density
- IR 100m & warm light(30m)
- Built-in speaker
- Alarm 2 in and 1 out, Audio 1 in and 1 out
- Micro SD, up to 256GB
- IP66 ingress protection



IPC6624SR-X33-VF

- 4MP 2688\*1520@30fps
- 4.5mm-148.5mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- 33X Optical Zoom
- SIP, false alarm filtering, Cross Line, Intrusion, Enter Area, Leave Area
- People Counting, people flow counting and crowd density monitoring.
- Smart IR, up to 150m (492 ft) IR distance
- AC 24V±25%, DC 24V±25% / PoE+(IEEE 802.3at) power supply
- Alarm I2/O1, Audio I1/O1
- IP66 ingress protection

4MP / 5MP



IPC6625SR-X33-VF

- 5MP 2688\*1520@30fps
- 4.5mm-148.5mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- 33X Optical Zoom
- SIP, false alarm filtering, Cross Line, Intrusion, Enter Area, Leave Area
- People Counting, people flow counting and crowd density monitoring.
- Smart IR, up to 150m (492 ft) IR distance
- AC 24V±25%, DC 24V±25% / PoE+(IEEE 802.3at) power supply
- Alarm I2/O1, Audio I1/O1
- IP66 ingress protection



IPC6658SR-X25-VF

- 8MP 3840\*2160@30fps
- 6mm-150mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- 25X Optical Zoom
- SIP, false alarm filtering, Cross Line, Intrusion, Enter Area, Leave Area
- People Counting, people flow counting and crowd density monitoring.
- Smart IR, up to 200m (656 ft) IR distance
- AC 24V±25%, DC 24V±25% / PoE+(IEEE 802.3at) power supply
- Alarm I2/O1, Audio I1/O1
- IP66 ingress protection

2MP



IPC6852SR-X38UG

- 2MP 1920\*1080@60fps
- 5.7mm-216.6mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- 38X optical zoom
- SIP, false alarm filtering, Cross Line, Intrusion, Enter Area, Leave Area
- Up to 120 dB Optical WDR
- Audio 1 in and 1 out, Alarm 2 in and 1 out
- Micro SD, up to 256GB
- Smart IR, up to 250m (820 ft)
- IP66 ingress protection



IPC7622ER-X44-VF

- 2MP 1920\*1080@60fps
- 5mm-220mm AF & motorized lens
- Ultra 265, H.265, H.264, MJPEG
- 44X optical zoom
- SIP, Cross Line, Intrusion, People flow & crowd density Enter/Leave Area, etc.,
- Optical WDR, Optical Defog,
- Rain-sensing auto wiper
- Alarm 7 in and 2 out, Audio 1 in and 1 out
- Micro SD, up to 256GB
- Smart IR, up to 400m (1312 ft)
- IP67 ingress protection

## ENTRY LEVEL NVR SERIES

NVR



NVR301-04LS2-P4

- Support Ultra 265/H.265/H.264
- 4-channel input
- 64 Mbps Income / 48 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 4K resolution recording
- 1 SATA HDD up to 6 TB
- 1 x Network RJ-45 10/100M
- 4 x PoE RJ-45 10M/100M
- Support cloud upgrade



NVR301-08LS2-P8

- Support Ultra 265/H.265/H.264
- 8-channel input
- 64 Mbps Income / 48 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- 1 SATA HDD up to 6 TB
- 1 x Network RJ-45 10/100M
- 8 x PoE RJ-45 10M/100M
- Support cloud upgrade

NVR



NVR301-04S3

- Support Ultra 265/H.265/H.264
- 4-channel input
- 64 Mbps Income / 48 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 4K resolution recording
- 1 SATA HDD up to 8TB
- 1 x Network RJ-45 10/100M
- Support cloud upgrade



NVR301-08/16S3

- Support Ultra 265/H.265/H.264
- 8/16 -channel input
- 64 Mbps Income / 48 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 4K resolution recording
- 1 SATA HDD up to 8TB
- 1 x Network RJ-45 10/100M
- Support cloud upgrade

NVR



NVR302-09S/S2

- Support Ultra 265/H.265/H.264
- 9 -channel input
- 160 Mbps Income / 64 Mbps Outgoing
- ONVIF (Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 4K resolution recording
- 2 SATA HDD up to 8TB
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade



NVR302-16S/S2

- Support Ultra 265/H.265/H.264
- 16 -channel input
- 160 Mbps Income / 64 Mbps Outgoing
- ONVIF (Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 4K resolution recording
- 2 SATA HDD up to 8TB
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade

NVR



NVR302-16S-P8

- Support Ultra 265/H.265/H.264
- 16-channel input
- 160 Mbps Income / 96 Mbps Outgoing
- ONVIF (Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 4K resolution recording
- 2 SATA HDD up to 10TB
- 1 x Network RJ-45 10/100/1000M
- 8 x PoE RJ-45 10M/100M
- Support cloud upgrade



NVR302-16S-P16

- Support Ultra 265/H.265/H.264
- 16-channel input
- 160 Mbps Income / 96 Mbps Outgoing
- ONVIF (Profile S, Profile G, Profile T )
- and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 4K resolution recording
- 2 SATA HDD up to 10TB
- 1 x Network RJ-45 10/100/1000M
- 16 x PoE RJ-45 10M/100M
- Support cloud upgrade

NVR



NVR304-16/32S

- Support Ultra 265/H.265/H.264
- 32-channel input
- 160 Mbps Income / 64 Mbps Outgoing
- ONVIF (Profile S, Profile G, Profile T) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 4 SATA HDD up to 8TB
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade

PRIME NVR SERIES

NVR



NVR302-16E2

- Support Ultra 265/H.265/H.264
- 16-channel input
- 160 Mbps Income / 320 Mbps Outgoing
- ONVIF: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- 2 SATA HDDs, Up to 10TB for each disk
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade



NVR302-32E2

- Support Ultra 265/H.265/H.264
- 32-channel input
- 160 Mbps Income / 320 Mbps Outgoing
- ONVIF: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA,
- HDMI at up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- 2 SATA HDDs, Up to 10TB for each disk
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade

NVR



NVR304-32E2

- Support Ultra 265/H.265/H.264
- 32-channel input
- 320 Mbps Income / 320 Mbps Outgoing
- ONVIF: Profile S, Profile G, Profile T
- Support 2-ch HDMI, 1-ch VGA, HDMI2 at up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- 4 SATA HDDs, Up to 10TB for each HDD
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade



NVR304-64E2

- Support Ultra 265/H.265/H.264
- 64-channel input
- 320 Mbps Income / 320 Mbps Outgoing
- ONVIF: Profile S, Profile G, Profile T
- Support 2-ch HDMI, 1-ch VGA, HDMI2 at up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- 4 SATA HDDs, Up to 10TB for each HDD
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade

NVR



NVR304-16/32X

- Support Ultra 265/H.265/H.264
- 16/32-channel input
- 384 Mbps Income / 384 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support RAID 1, 5
- 4 SATA HDDs, Up to 10TB for each HDD
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade



NVR504-16/32B

- Support Ultra 265/H.265/H.264
- 16/32-channel input
- 320 Mbps Income / 160 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support RAID 1, 5
- 4 SATA HDDs, Up to 16TB for each HDDt
- 2 x Network RJ-45 10/100/1000M
- Support cloud upgrade

NVR



NVR308-32/64X

- Support Ultra 265/H.265/H.264
- 32/64-channel input
- 384 Mbps Income / 384 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support RAID 1, 5
- 8 SATA HDDs, Up to 10TB for each HDD
- 2 x Network RJ-45 10/100/1000
- Support cloud upgrade
- Support N+1 Hot spare



NVR508-32/64B

- Support Ultra 265/H.265/H.264
- 64-channel input
- 320 Mbps Income / 160 Mbps Outgoing
- ONVIF(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support RAID 1, 5
- 8 SATA HDDs, Up to 16TB for each HDD
- 2 x Network RJ-45 10/100/1000
- Support cloud upgrade
- Support N+1 Hot spare

## PRO NVR SERIES

NVR



NVR516-64/128

- Support Ultra 265/H.265/H.264
- 64/128-channel input
- 64 Ch 384 Mbps In/ 384 Mbps Out.
- 128 Ch 512 Mbps In/ 384 Mbps Out.
- ONVIF: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 2-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording

- Redundant power supply optional
- 2 decoding cards optional, up to 12-ch HDMI
- Support HDD hot swap
- RAID 0, 1, 5, 6, 10, 50, 60
- 16 SATA HDDs, up to 16TB for each HDD
- 4 x Network RJ-45 10/100/1000
- Support 2 miniSAS Interfaces
- Support 12V power output
- Support cloud upgrade
- Support N+1 Hot spare

NVR



NVR824-128/256R

- Support Ultra 265/H.265/H.264
- 128 / 256-channel input
- 768 Mbps Income / 768 Mbps Outgoing
- ONVIF: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 2-ch HDMI, 1-ch VGA,
- HDMI at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Redundant power supply optional

- 2 decoding cards optional, up to 12-ch HDMI
- Support HDD hot swap
- RAID 0, 1, 5, 6, 10, 50, 60
- 24 SATA HDDs, up to 16TB for each HDD
- 4 x Network RJ-45 10/100/1000
- Support 2 miniSAS Interfaces
- Support 12V power output
- Support cloud upgrade
- Support N+1 Hot spare

## ALL IN ONE SERVER

UNICORN



UNICORN

- Third-part IP Cameras supported with standard ONVIF
- Support for mobile clients (iOS & Android) access
- Up to 1000 device/2000 channels connections
- Unified management of NVR, IPC, decoder, network keyboard and cloud devices
- 16 SATA HDDs, Up to 14TB each HDD
- 16×1080P decoding outputs in 3 screens, expandable up to 112×1080P in 15 screens with 2 decoding cards inserted
- Support for live view, playback, sequence, video wall, E-map, two-way audio, alarm plan
- Support of network fault tolerance, multi-IP configuration and load balancing
- Provide a comprehensive management dashboard, server status, device/channel online/offline status, HDD status, online users, bandwidth usage, packet loss rate, log query
- RAID 0, 1, 5, 6, 10, 50, 60
- Support 2 miniSAS Interfaces, for extend storage capacity
- 4 x Network RJ-45 10/100/1000, 2×1000M SFP optical interfaces
- Support N+1 Hot spare



## HYBRID NVR SERIES

### NVR



NVR301-04Q3

- 4-channel BNC input
- 2-ch(only IP up to 6ch),each channel up to 4K
- 8MP@15fps, 5MP@20fps, 4MP@30fps 1080P@30fps 720P@60fps
- Support H.265/H.264
- 48 Mbps Income / 48 Mbps Outgoing
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 1-ch HDMI output at up to 4K(3840x2160), 1-ch VGA output, 1ch CVBS Output
- 1 SATA HDD up to 8TB
- 1 x Network RJ-45 10/100M



NVR301-08Q3

- 8-channel BNC input
- 4-ch(only IP up to 12ch),each channel up to 4K
- 8MP@15fps, 5MP@20fps, 4MP@30fps 1080P@30fps, 720P@60fp
- Support H.265/H.264
- 56 Mbps Income / 64 Mbps Outgoing
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 1-ch HDMI output at up to 4K(3840x2160), 1-ch VGA output, 1ch CVBS Output
- 1 SATA HDD up to 8TB
- 1 x Network RJ-45 10/100M

### NVR



NVR302-16Q3

- 16-channel BNC input
- 8-ch(only IP up to 24ch), each channel up to 8MP
- 8MP@15fps, 5MP@20fps, 4MP@30fps, 1080P@30fps, 720P@60fp
- Support H.265/H.264
- 112 Mbps (after all analog channel conversion) Income / 160 Mbps Outgoing
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras
- 1-ch HDMI output at up to 4K(3840x2160), 1-ch VGA output, 1ch CVBS Output
- 2 SATA HDD up to 8TB
- 1 x Network RJ-45 10/100/1000M

## POE SWITCHES & ACCESSORIES

### POE SWITCHES



NSW2020-6T-POE-IN

- 6×100Mbps network ports (RJ45)
- 4 PoE ports
- Switching capacity - 1.2Gbps
- Forwarding performance- 0.90MBPS
- Max capacity: 65W
- Max capacity for single port: 30W
- PoE Transmission distance up to 250 meters.



NSW2020-10T-POE-IN

- 10×100Mbps network ports (RJ45)
- 8 PoE ports
- Switching capacity - 2Gbps
- Forwarding performance- 1.49MBPS
- Max capacity: 120 W
- Max capacity for single port: 30W
- PoE Transmission distance up to 250 meters.

### POE SWITCHES



NSW2020-16T1GT1GC-POE-IN

- 16×10/100Mbps PoE+ ports (RJ45)+2×1000Mbps Combo ports,RJ45 port, full duplex, MDI/MDI-X adaptive
- 16 PoE ports
- Switching capacity - 7.2Gbps
- Forwarding performance- 5.36MBPS
- Max capacity: 225W
- Max capacity for single port: 30W
- PoE Transmission distance up to 250 meters.

### ACCESSORIES



KB1100

- Four-dimensional joystick
- 1 RJ-45 10 M / 100 M adaptive
- Ethernet port,1
- USB2.0 interfaces
- 1 RS-232, 2 RS-485
- 12V DC



TR-WE45-IN

- PTZ Wall Mount

# Uniarch Life in Focus



Via optimizing for ease of use, we leave rooms for what's matter the most. By business empowerment, we entail creating an environment that fosters growth.



## ENTRY LEVEL HD SERIES

2MP



UAC-B112-F40

- 2MP high quality image
- 4mm fixed lens
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages



UAC-T112-F28

- 2MP high quality image
- 2.8mm fixed lens
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages

5MP



UAC-B115-F40

- 5MP high quality image
- 4mm fixed lens
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages



UAC-T115-F28

- 5MP high quality image
- 2.8mm fixed lens
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages

## ENTRY LEVEL AUDIO HD SERIES

5MP



UAC B112-AF40H

- 2MP high quality image
- 4mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67



UAC T112-AF28H

- 2MP high quality image
- 2.8mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67

5MP



UAC B115-AF40H

- 5MP high quality image
- 4mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- Supports 20m white light illumination, 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67



UAC T115-AF28H

- 5MP high quality image
- 2.8mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- Supports 20m white light illumination, 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67

## ENTRY LEVEL COLORHUNTER HD SERIES

2MP



UAC T112-F40W

- 2MP high quality image
- 4mm fixed lens
- TVI/AHD/CVI/CVBS
- Supports 20m white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages



UAC-T112-F28-W

- 2MP high quality image
- 2.8mm fixed lens
- TVI/AHD/CVI/CVBS
- Supports 20m white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages



5MP



UAC-B115-F40-W

- 5MP high quality image
- 4mm fixed lens
- TVI/AHD/CVI/CVBS
- Supports 20m white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages



UAC-T115-F28-W

- 5MP high quality image
- 2.8mm fixed lens
- TVI/AHD/CVI/CVBS
- Supports 20m white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67
- OSD configuration menu in 11 languages

## ENTRY LEVEL COLORHUNTER AUDIO HD SERIES

2MP



UAC B112-AF40-WH

- 2MP high quality image
- 4mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67



UAC-T112-F28-WH

- 2MP high quality image
- 2.8mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67

5MP



UAC B115-AF40-WH

- 5MP high quality image
- 4mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67



UAC-T115-F28-WH

- 5MP high quality image
- 2.8mm fixed lens
- Built-in mic for HQ audio via coaxial cables
- TVI/AHD/CVI/CVBS
- IR 20m with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67

## ENTRY LEVEL XVR SERIES

XVR



XVR-104/08F

- 4/8-channel BNC input
- 4ch XVR Upto 6 IP ch(6MP) replacing of all BNC
- 8ch XVR Upto 10 IP ch(6MP) replacing of all BNC
- 2MP@30fps, 720P@30fps
- Support H.265/H.264
- 4-ch XVR bandwidth: 32Mbps
- 8-ch XVR bandwidth: 40Mbps
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IPC
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- 1 SATA HDD up to 6TB
- 1 x Network RJ-45 10/100M



XVR-104G3

- 4 -channel BNC input
- 2-ch(only IP up to 6ch), each channel up to 4MP IP Video Input
- Support 5MP@20fps(The first channel), 5MP@12fps, 4MP@15fps, 1080P@30fps, 720P@60fps
- Support H.265/H.264
- 48 Mbps Income / 60 Mbps Outgoing
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IPC
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- 1 SATA HDD up to 6TB
- 1 x Network RJ-45 10/100M



XVR-108/16G3

- 8/16-channel BNC input (Support TVI, AHD, CVI, CVBS, IPC)
- 8ch XVR @ 4-ch (only IP up to 8ch), each channel up to 4MP IP Video Input
- 16ch XVR @ 8-ch(up to 16-ch after analog camera conversion)
- Support 5MP@12fps, 4MP@15fps, 1080P@30fps, 720P@30fps
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- Support H.265/H.264

- 48 Mbps Income / 60 Mbps Outgoing
- Support audio over coaxial cable
- 1 SATA HDD up to 6TB
- 1 x Network RJ-45 10/100M

## ENTRY LEVEL IP SERIES

2MP



IPC-T122PF28

- 2MP (1920\*1080)@25fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- 3-Axis



IPC-B112PF28

- 2MP (1920\*1080)@25fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- 3-Axis

2MP



IPC-T122APF28

- 2MP (1920\*1080)@25fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- IP67 protection
- 3-Axis



IPC-B122APF40

- 2MP (1920\*1080)@25fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- IP67 protection
- 3-Axis

3MP



IPC-T213-APF28W

- 3MP(2304\*1296)@25/20fps
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 15m (49ft)
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- IP67 protection
- 3-Axis



IPC-B233-APF40-W

- 3MP(2304\*1296)@25/20fps
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 50m (164ft)
- White Light, up to 15m (49ft)
- ONVIF
- 3-Axis
- Built-in Mic
- IP67

3MP / 4MP



IPC-B213APF40

- 3MP(2304\*1296)@25/20fps
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- IP67 protection
- 3-Axis



IPC-B124-APF28(40)

- 4MP (2592\*1944), Max 20fps;
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- IP67 protection
- 3-Axis

4MP / 5MP



IPC-T124APF28

- 4MP (2592\*1944), Max 20fps;
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- Built-in Mic
- IP67 protection
- 3-Axis



IPC-B125-PF40

- 5MP (2592\*1944), Max 20fps
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- 3-Axis



## SMART HOME CAMERA

2MP



Uho-B1R-M2F3

- 2MP, 1/2.9"CMOS sensor
- 1920\*1080 @30/25fps
- 2.8mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Built-in Mic
- Supports 128 G Micro SD card
- Wi-Fi / RJ45 Connect & easy installation
- IP67 protection
- 3-Axis



Uho-B1R-M2F4

- 2MP, 1/2.9"CMOS sensor
- 1920\*1080 @30/25fps
- 4mm fixed lens
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Built-in Mic
- Supports 128 G Micro SD card
- Wi-Fi / RJ45 Connect & easy installation
- IP67 protection
- 3-Axis

2MP / 3MP



Uho-S2E

- 2MP, 1/3"CMOS sensor
- 1920\*1080 @30/25fps
- 2.8mm fixed lens
- Ultra 265, H.265, H.264
- Smart IR, up to 10m (33ft) IR distance
- Built-in Mic
- Support 256 G Micro SD card
- Wi-Fi / RJ45 Connect & easy installation
- IP67 protection



Uho-P1A-M3F4D

- 3MP, 1/2.8"CMOS sensor
- 2304\*1296@20fps
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Built-in Mic & Speaker, two-way audio
- Smart IR, up to 30M IR & 10M warm light
- 2D/3D DNR (Digital Noise Reduction)
- Supports 256GB Micro SD card
- Wi-Fi / RJ45 Connect & easy installation
- IP66 protection

3MP PAN & TILT



IPC-P213-AF40KC

- 3MP (2304\*1296)@20fps
- 4mm fixed lens
- Ultra 265, H.265, H.264
- Support digital WDR
- Built-in Mic & Speaker
- Support two-way audio
- Smart IR, Up to 30 m (98 ft) IR and 30m (98 ft) warm light distance
- Supports 256 G Micro SD card
- IP66 ingress protection
- Self-contained bracket



IOT-UNEAR A30

- Omnidirectional 4 microphones array algorithm, 5-meter far-field clear voice pickup
- Exclusive AI noise-suppression technology, significantly increase concentration of conference participants
- Real full-duplex, HQ uninterrupted communication
- 115° wide-angle distortionless camera captures all meeting participants clearly
- Plug & play, general compatibility with leading online conference platforms
- Audio & video all-in-one, intuitive control experience

## Softwares:

Uniview

PC



EZ Station



EZ Tools

Mobile



EZ View

Uniarch

PC



Uniarch Client

Mobile



Uniarch



- Uniview
- UniviewHQ
- Uniview
- Uniview Tech
- Info@univiewworld.in
- rma@univiewworld.in
- +91 7304449941
- Toll Free: 1800-890-3788



[www.uniview.com](http://www.uniview.com)

Authorised Distributor / Dealer

**VipseeInfotech**  
Redefining Networks

+91 9321139367  
022 44508542