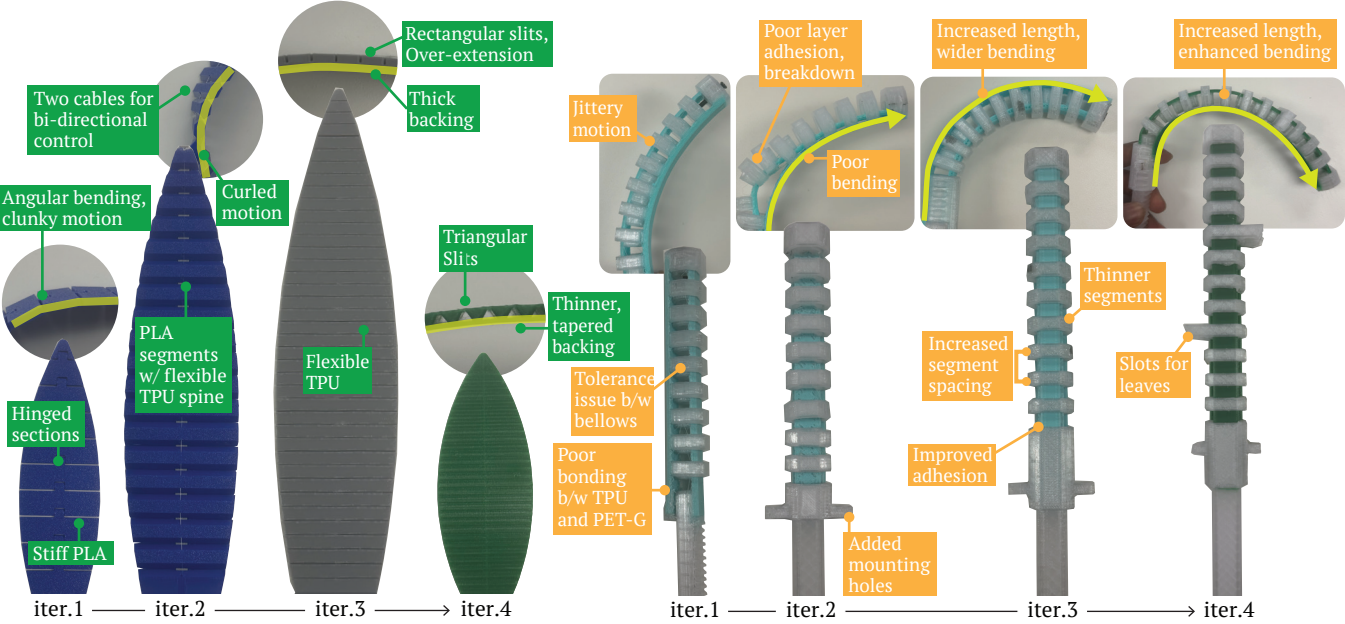
Two cables for bi-directional control
Curled motion
Angular bending, clunky motion
PLA segments w/ flexible TPU spine
Hinged sections
Stiff PLA
Rectangular slits, Over-extension
Thick backing
Flexible TPU
Triangular Slits
Thinner, tapered backing
iter.1
iter.2
iter.3
iter.4
Jittery motion
Poor layer adhesion, breakdown
Poor bending
Increased length, wider bending
Increased length, enhanced bending
Tolerance issue b/w bellows
Poor bonding b/w TPU and PET-G
Added mounting holes
Thinner segments
Increased segment spacing
Improved adhesion
Slots for leaves
iter.1
iter.2
iter.3
iter.4