




Taxiway obstruction Light LED

Low Intensity, Omni-directional, Elevated Light
VAS-OBS / VAS-OBS-230

Operating Conditions

- Temp:- -25° / +55°
- Wind:- 370 Km/hr
- Elevation Height :- 280mm
- Relative Humidity : ≤95%

Installation Diagram

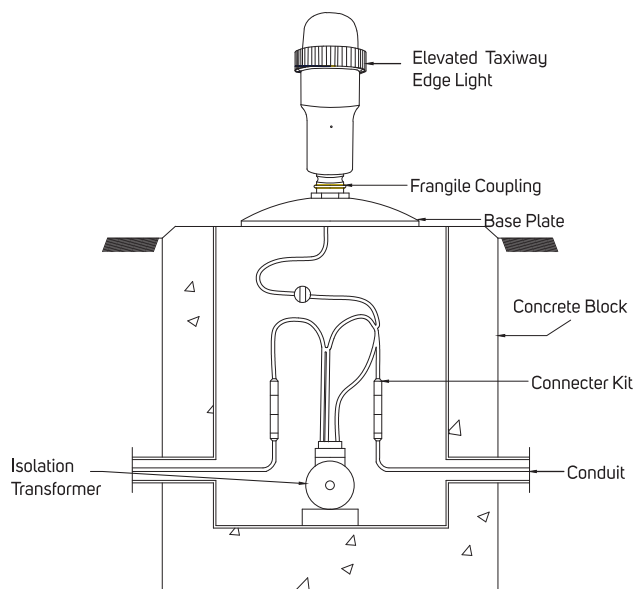


Installation Of OBS in Seating Box

Electrical Supply and Current driven

For 15W Transformer

Main Beam Aperture		Colour	Typical Power consumption	
Horiz(°)	Vert(°)		Fitting Watts	Tx Primary Watts
±6.5°	0-7°	RED	Less than 8W	15W
Horiz(°)	Vert(°)		Current	Voltage
±6.5°	0-7°	RED	26 mA	230 V

- Suitable for use in 6.6A airfield lighting circuits normally supplied from 10W/15W Isolating transformer
- Fitting can work with existing AFL Taxiway Circuit having 45 watt transformers
- Low energy consumption - Below 8W.
- LED Power consumption - 1 W.
- Average light intensity 12 Cd.

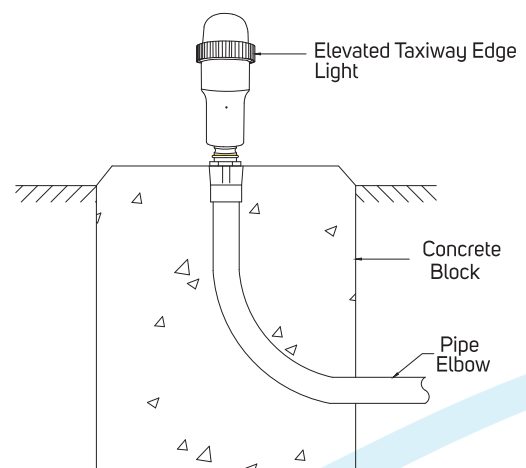

Installation Of OBS in Pipe Elbow



Features

- Ultra-bright single 1W LED.
- Single Lens used for LEDs.
- Aluminium Alloy Base for easy mounting.
- Easy to use On/Off Push Button Switch.
- Lightweight, corrosion resistant body.
- Rechargeable Battery.
- Three step brightness control using slider switch.
- The battery will be recharged at 230 V, 50 Hz single phase power supply with the use of charger.
- Once the battery will be charged it will give us a backup of 14- 20 hours.
- The light IP rating is IP65.
- Working frequency of 50HZ.
- The LED is of Red colour.

Technical Specifications

Intensity	>10Cd
No. of LEDs	1
Maximum Power	1W
Type of Battery	Ni-Cd
Lens Material	Polycarbonate
Colour of LED	Red
Temperature Range	-40 Deg C to +50 Deg C
IP Rating	Ip65
Service Life	Up to 100,000 Hours
Level of Brightness	3
Battery Charging Indicator	Green for Full Charge & Red for Low
Battery Capacity	2.4V, 5000mAH

Part Diagram

