



Runway Guard Light LED (L-804)

High Intensity, Uni-directional, Elevated Light

VAS-RGL-L

Compliance with standards

- ICAO Annex 14, Volume 1
- ICAO ADM DOC 9157 Part 5 & 6
- FAA AC-150/5345-46F EB No. 67D
- IEC TS 61827

Application

- Runway Guard Light (RGL) is installed at taxiway runway intersections to warn pilots and vehicle operators before entering an active runway. It enhances visibility and safety in low visibility conditions and helps prevent runway incursions.

Performance

- Power Factor: >0.9
- Environmental Temp. -25°C to +55°C
- Energy Consumption 31W
- Lights can withstand with Jet Blast & High Wind Pressure (Wind load-485km/h).

Electrical supply

- Suitable for use in 2.8 to 6.6A airfield lighting circuits.
- Isolation Transformer 45W

Features

- This Light is suitable for a runway visual range less than 500 meters.
- The Light is designed to withstand wind speed of 480km/h.
- Flashes 45 to 50 times per minute, and the LED sources emits light alternatively.
- The professional LED heat dissipation method can effectively reduce the working temperature of the LED Junction and the driver, and ensure the long service life of the LED's.
- The design of the light head hood can effectively prevent the pilot from being dazzled by light from a specific angle;
- Aluminium alloy body-light weight, corrosion-resistant & powder coated for environmental protection.
- The overall protection of the luminaire preventing dust and rain from eroding the interior of the luminaire;
- The glass cover is made of special tempered glass to prevent the glass cover from bursting due to drastic changes in temperature;
- Fasteners are made of stainless steel, which is durable;



Photometric Data

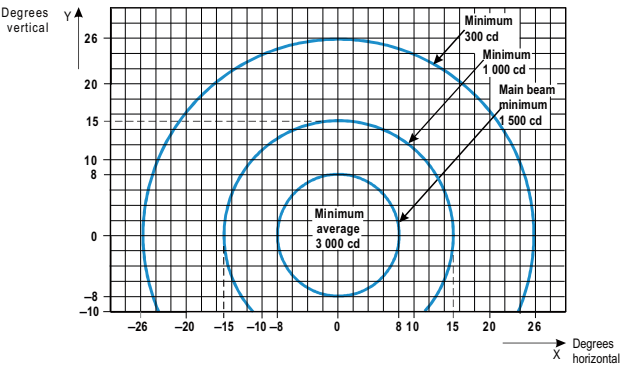


Figure A2-25. High-Intensity Runway guard light


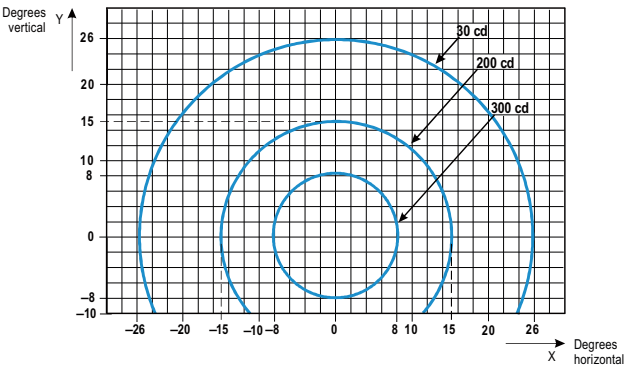


Figure A2-24. Low-Intensity Runway guard light

Standard	Main beam		Color	Main beam minium on curve (Cd)		High-Intensity Min.Avg. (Cd)
	H	V				
ICAO Fig. A2-25	±8°	±8°	Yellow	1500	300	3000
ICAO Fig. A2-24						
Chromaticity	ICAO Annex. 14 Fig A1-1b					

Installation

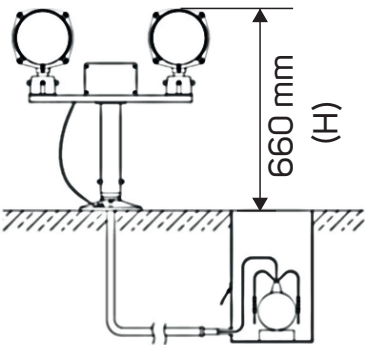


Ordering information

VAS-RGL-L

- L = Led
- RGL = Runway guard light
- VAS = VARDHMAN

Packaging data

- Net Weight 13.2 kg
- Gross Weight 14.5 kg
- Box Size 640 (l) x 340 (w) x 360 (h) (in mm)

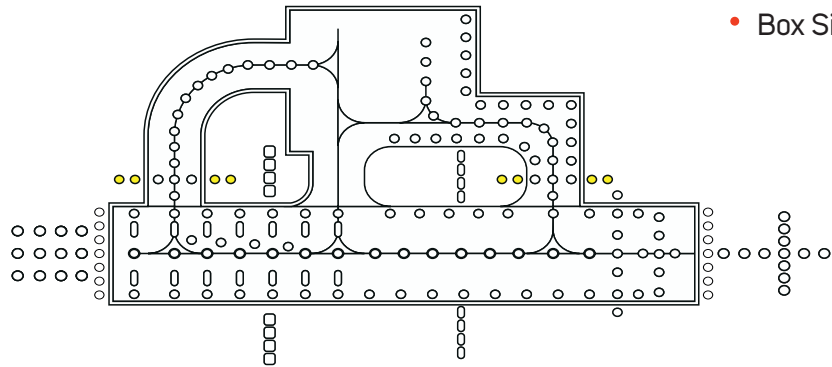

1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India

+91-9818295444 IT: +91-11-45710588

contact@vardhmanairports.com www.vardhmanairports.com

CIN U62100DL2014PTC263759