

Secondary Connectors



VAS-SC

Compliance with standards

- ICAO: Aerodrome Design Manual 9157 Part 5
- FAA: AC150/5345-26 (L-823)


Features

- Connector are resistant to abrasive chemicals and all weather conditions.
- Connector kits cover all currently available airfield lighting cables.
- FAA L-823 style 5 Plug & style 12 Receptacle are used.
- Excellent watertightness.
- Quick on-site installation.

Description

- Plug and Receptacle, Type II, Class B, 1.5/4 sq. mm style 5 & 12

Outline Diagram

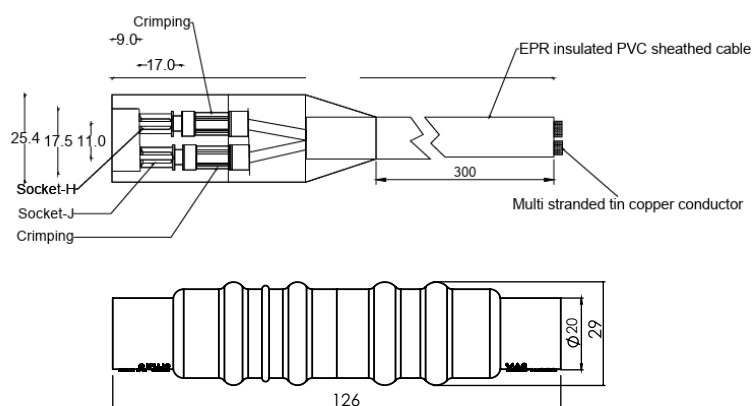

Application

Secondary Connectors are designed for a fast-and-easy watertight connection between the secondary cable and the series isolating transformer

Performance

- Working Temperature between -55° to 65° Degree.

Electrical supply

- Upto 20A, 600V.

Part List

- Plug Body
- Male Socket
- Receptacle Body
- Female Socket
- Grease

Dimensional data

VAS Type	Type	Conductor Size	AWG	Cable Diameter
VAS SP-1	Plug	1.5 to 2.5 mm ²	16-14	11.0-12.0mm
VAS SP-1.1	Plug	4.0 mm ²	12-10/8	11.0-12.0mm
VAS SR-1	Receptacle	1.5 to 2.5 mm ²	16-14	11.0-12.0mm
VAS SR-1.1	Receptacle	4.0 mm ²	12-10/8	11.0-12.0mm

