



Taxiway Edge Light LED (L-861T)

Low Intensity, Omni-directional, Elevated Light

VAS-TXE-L

Compliance with standards

- ICAO Annex 14, Volume 1
- DGCA CAR Series B Part-I Section 4
- FAA AC-150/5345-46F

Application

- Low-Intensity, Omni-directional, elevated taxiway edge LED light that can be used in SAPL & ICAO category I, II & III systems.

Performance

- Power Factor: >0.9
- Environmental Temp. : -25°C to +55°C
- Relative Humidity: ≤95%.
- Energy Consumption: 9W
- Lights can withstand with Jet Blast & High Wind Pressure.


Electrical supply

- Suitable for use in 6.6A airfield lighting circuits.
- Isolation Transformer 15W
- Color Blue

Features

- Aluminium alloy body- light weight, corrosion-resistant & powder coated.
- Compact structure and attractive appearance, with small windward area and strong wind resistance capability.
- Smooth outer dome eliminates the build-up of dirt & easy to clean.
- Long life LED technology with rated projected life greater than 50,000 hours.
- Operates on either 3 or 5 step constant current operation.
- Reduces power consumption up to 80% compared to incandescent.
- Removable Cap secures glass dome to housing, and allows for quick access to LED optical assembly without any special tool.

Photometric Data

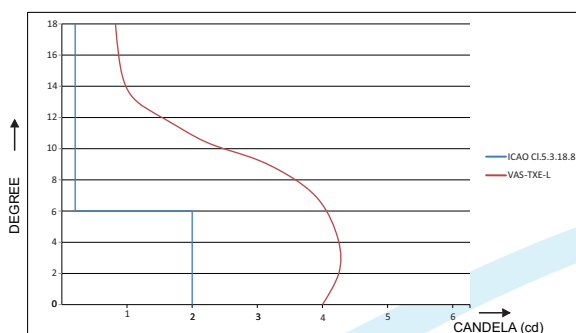


Photometric Data


Taxiway edge Light				
Application	Main beam		Required Min. Average Cd	Actual Average. Cd
	H	V		
ICAO Clause 5.3.18.8	360°	0°-6°	2cd	>4cd
	360°	6°-75°	0.2cd	>0.2cd
Chromaticity			ICAO Annex. 14 Fig A1-1b	

Ordering information


VAS-TXE-L

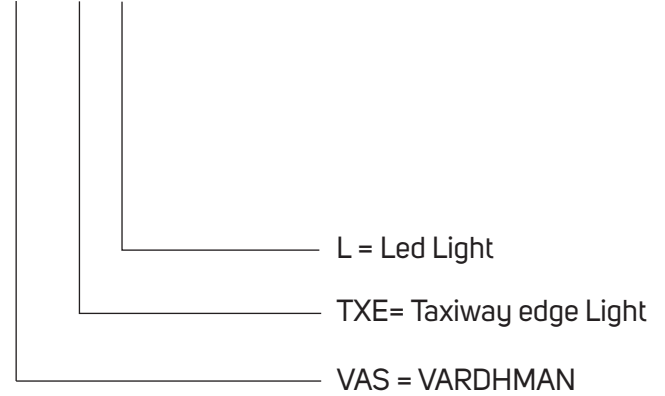

Installation

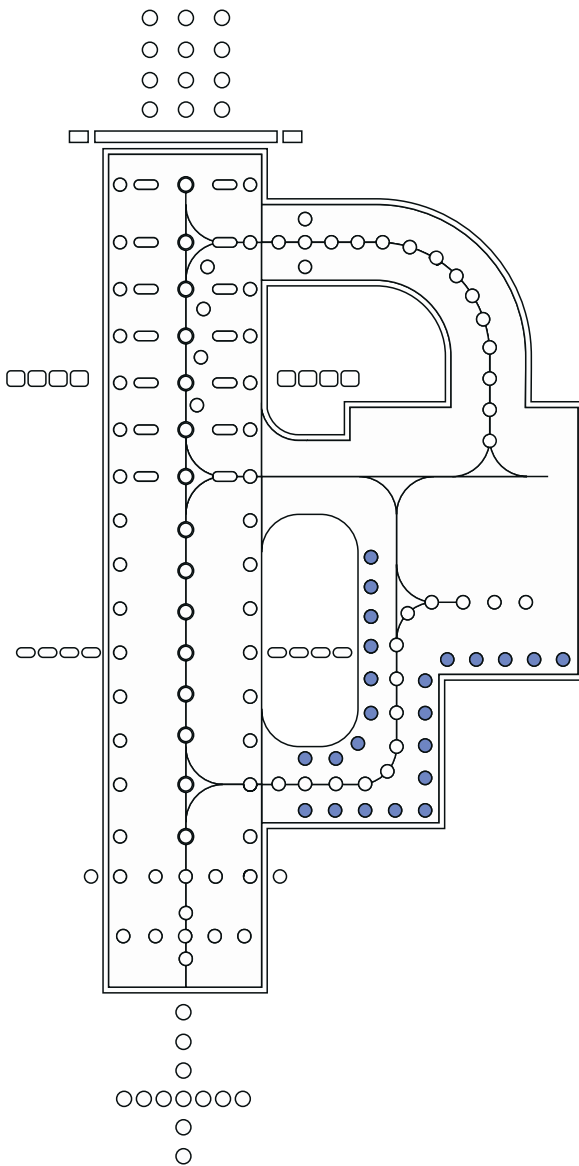

Dimensions

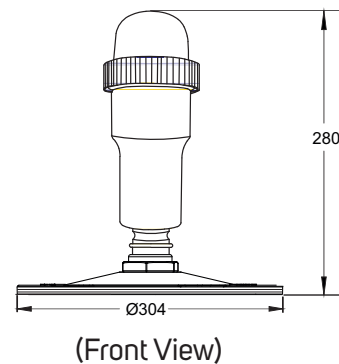

Packaging data

- Net Weight 1.3 kg
- Gross Weight 1.4 kg
- Box Size 110 mm (l) x 110mm (w) x 260mm (h)



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India



+91-9818295444 IT: +91-11-45710588



contact@vardhmanairports.com



www.vardhmanairports.com


CIN U62100DL2014PTC263759

Ver. 1.0

Rev. 1.2 /Oct-2025 Product specifications and pictures may slightly vary and are not binding. We reserve the right to revise or upgrade the specification for improvement.


Installation

- The Light fixture can be installed on pipe elbow & C.I box.

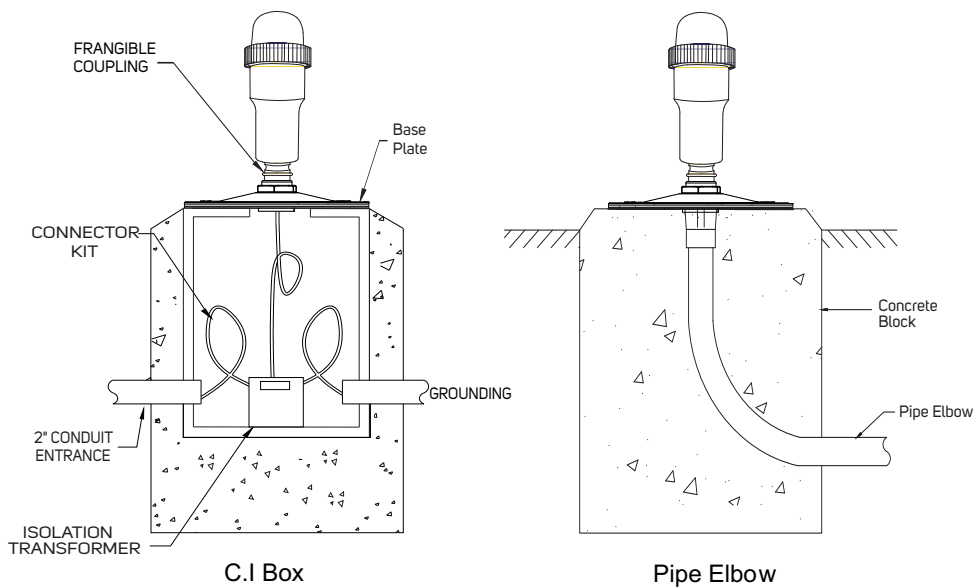

Components

S no.	Part Names	Part Codes	S no.	Part Names	Part Codes
1	Ring	TXE-L001-0004	6	Gasket - Housing	TXE-L001-0002B
2	Gasket-Dome	TXE-L001-0002A	7	Main Housing	TXE-L001-003
3	Dome	TXE-L001-0001	8	Secondary Cable	TXE-L001-0008
4	Led Assembly	TXE-L001-0006	9	Frangible Coupling	TXE-L001-0005
5	Driver-6.6A Driver-230V	TXE-L001-0020 TXE-L002-0020	10	Base Plate	TXE-L001-0007

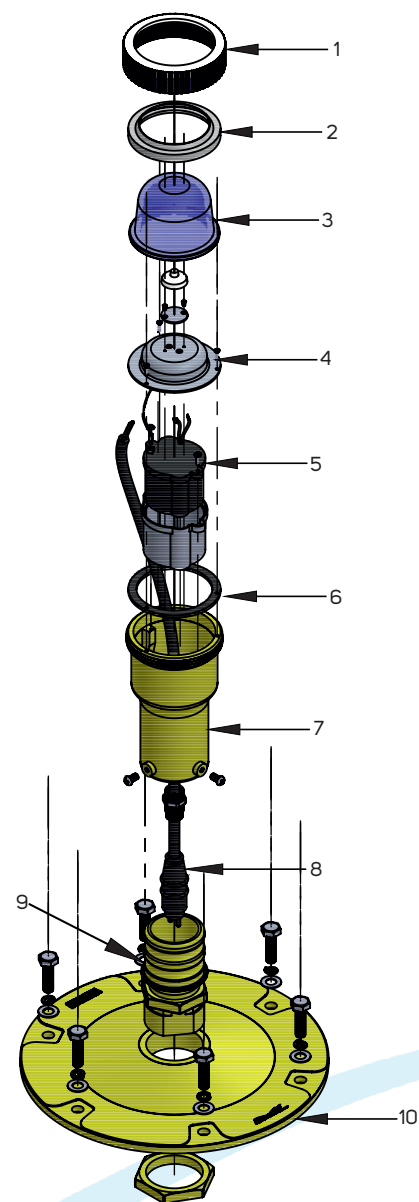

This Page is intentionally Left Blank



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India



+91-9818295444 IT: +91-11-45710588



contact@vardhmanairports.com



www.vardhmanairports.com

CIN U62100DL2014PTC263759