


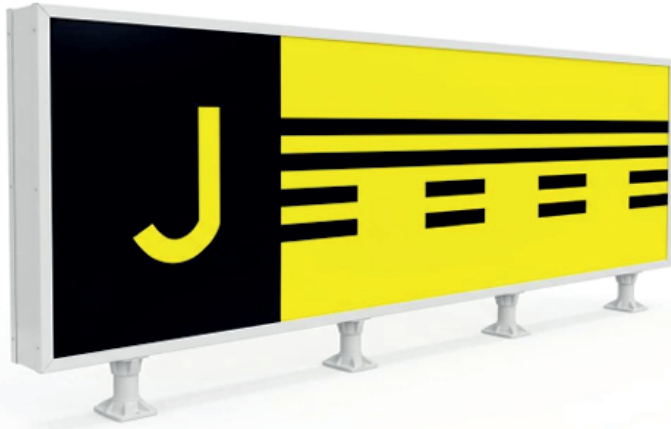

Airfield Guidance Double side Sign Board (LED)

VAS-DS-L

Compliance with standards

- ICAO Annex 14 Volume-I
- ICAO Aerodrome Design Manual Doc 9157 Part 4 & 6
- FAA: AC 150/5345 -44

Features

- Double Side Display Sign Board with Depth 140- 145 mm
- Aluminium alloy extruded profile, light weight, corrosion resistant anodized, designed for use in harsh environments.
- Equipped with Edge lit Osram LED Modules
- Easy installation and easy maintenance at low cost.
- UV resistant Poly Carbonate Sheet with Self adhesive vinyl film
- An integrated, electronic converter for Series circuit (2.8-6.6A input) or 230VAC input circuit
- Long-life LED lighting technology with low power consumption.
- Any topology of CCRs designed in accordance with ICAO or FAA requirements can be used.

Applications

Airfield Sign boards are used for providing guidance & information on runways & taxiways.

Performance

- Protection Degree: IP66
- Working Temperature: -40°C to +55°C
- Power factor typically >0.90
- Signs can withstand Jet Blast & High Wind Pressure (up to 260 knots)

Electrical Supply

Power	Requirements
Constant Current Regulator (Series System)	2.8-6.6 A
Mains Power System (Constant Voltage)	230VAC

Power consumption

Sign Board Length	Supply	Wattage (Approx.)	Transformer Size (Min.)
Up to 1m	6.6A	30W	45W
1m~1.5m	6.6A	30W-48W	65W
1.5m~2m	6.6A	48W-58W	100W
2m~3m	6.6A	58W-80W	100W



Photometric Data

- For Visual range: <800m

Colour	Min. Required
Red	30 Cd/m ²
Yellow	150 Cd/m
White	300 Cd/m

- For Visual range: >800m

Colour	Min. Required
Red	10 Cd/m ²
Yellow	50 Cd/m
White	100 Cd/m


Installation Diagram

Details of items provided in each sign:


- Driver (24 VDC) - 1 No.
- LED Module - As required
- Sec. Lead (2.5mtr) - 1 Nos.
- Base with mounting pipe and flange - As required

Sr. no.	Particulars	Description
1	Thickness of Aluminum profile	2 mm
2	Thickness of Poly carbonate sheet	4 mm
3	Signboard Depth	140-145mm
4	Polycarbonate sheet	4mm thick, UV coated long life (Make Ultralite)
5	LED Module IP rating & wattage	LED Module IP-66 wattage- 2.8 watt per Module
6	LED Module Make	Osram
7	LED Colour Temperature	6500 K,
8	LED module Life	> 60000 hrs
9	Signage Driver Make & wattage	Driver 25 V DC output make- VAS Each board will be illuminated by one Driver Having provision for dual Input, Current range-2.8 A to 6.6 A from Airfield CCR Ckt.
10	Coloured Vinyl Film make	3M & Avery Dennison
11	Mounting Leg	Mounting Leg- Aluminum 60mm OD, with Flange (Base)all nut bolts will be of SS

SIDE VIEW

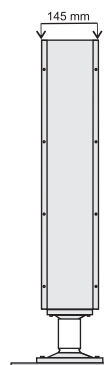

FRONT SIDE VIEW

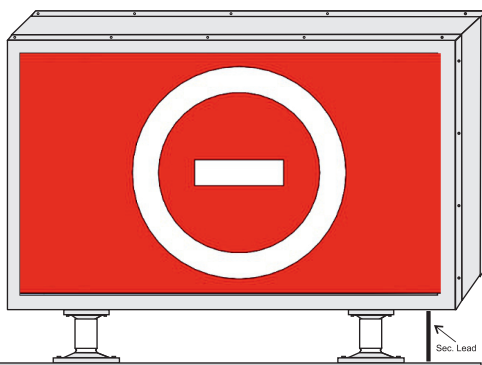

BACK SIDE VIEW

