


Heliport-Helideck Elevated Light (LED)



VAS-HP-E-L

Omni-Directional Elevated Light

Heliport-Helideck Elevated Light

- Heliport Elevated lights should not exceed a height of 25cm for Surface-level and Elevated heliports, not exceed a height of 15 cm for helideck. There is a fragile coupling in the base connection for heliport so if aircraft hit the light by accident, the base will break immediately to avoid more damage.
- The lights could be used as FATO light, TLOF lights, Taxiway lights.

Compliance with Standards

- ICAO Annex 14 Volume II Heliports Chapter 5.3.
- FAA AC 150/5390-2B Heliport Design Guide

Application

- Surface-level and Elevated heliports
- Helideck Shipboard heliports



Features

Electrical

- High-intensity CREE LED as light source saving power consumption and maintenance, 95% less power than equivalent incandescent light
- Power supply available in AC(110-240VAC) and DC48V, DC12V and other voltage is optional
- LED power supply board includes short circuit and open circuit protection

Physical

- Unique designed Glass lens for converging light
- Powder coated bright yellow color base make better visibility
- Base material is die casting aluminum which has strong corrosion resistance, Shock and Vibrations protection

Optional

- Infrared LED for pilot using NVG(Night Vision Goggles)
- Controller for power supplying and turn ON/OFF light
- VHF pilot to ground remote control
- Light intensity adjustable



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India

+91-9818295444

IT: +91-11-45710588




contact@vardhmanairports.com




www.vardhmanairports.com

CIN U62100DL2014PTC263759

Dimensions

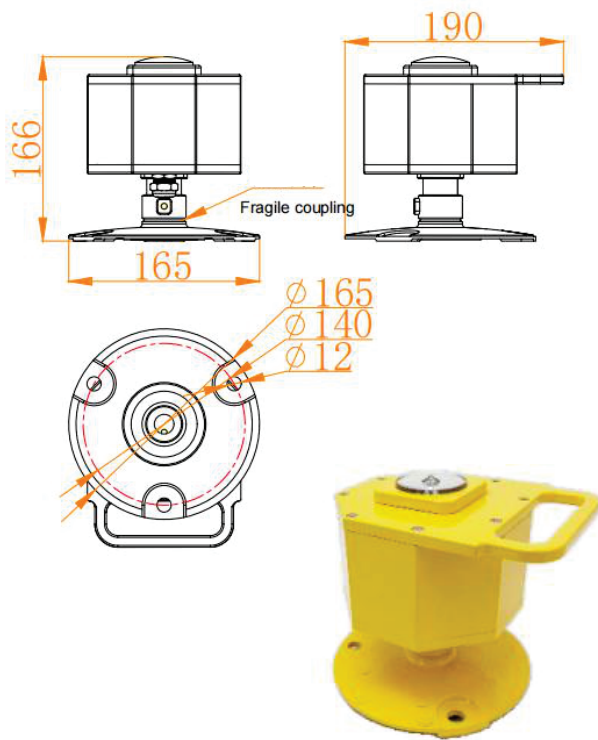

(With fragile coupling base for heliport)

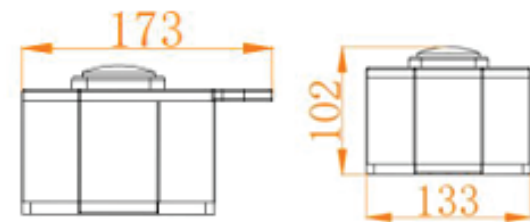

(With mounting base for helideck)

Technical Specification

SPECIFICATIONS	VAS-HP-E-L
Light Characteristics	
Light Source	Ultra high intensity LED
Available Colors	Green, Yellow, White, Red, Blue, IR
Intensity(cd)	ICAO standard
Horizontal Degree(°)	Omni direction (360°)
Vertical Degree(°)	ICAO specification
Operation Mode	24hours operation
LED Life Experience(hours)	>100,000
Flash Characteristics	Steady burning
Electrical Characteristics	
Operating Voltage	DC48V and AC(110-240VAC), DC12V
Power(W)	5W
Physical Characteristics	
Body Material	UV protected Polycarbonate
Base Material	Powder-coated Die-casting aluminum
Mounting	140×140×Ø12(Installed on heliport) 112×112×Ø12(Installed on helideck)
Dimension(mm)	190×165×166 (Installed on heliport) 173×133×102(Installed on helideck)
Weight(kg)	1.9 or 1.5
Product Life Expectancy	≥10years
Environmental Factors	
Ambient Temperature(°C)	-55~70
Humidity	10~90%
IP Index	IP 66
Compliance	
ICAO	ICAO Annex 14 Volume II Heliports 5.3
Options Available	
	Infrared LED compatible for NVG (Night Vision Goggles) VHF Pilot to Ground Remote Control Light intensity adjustable

Model Configuration

VAS-HP-E-TLOF-G-L

L = Led
G = Green
W = White
IR = Infrared
B = Blue

TLOF = Touchdown and lift-off area lighting
FATO = Final approach and take-off area lighting
HP = Heliport Lighting
TAX = Taxiway Light
E = Elevated
HP = Heliport
VAS = Vardhman

Application	Colors
TLOF	G
FATO	W
HP	IR
TAX	B

Photometric Data

Application	Vertical Degree(°)	Average Light Intensity (cd)	ICAO Standard
Touchdown and lift-off area lighting	20° < E 90°	27.1	3
	13° < E 20°	54.6	8
	10° < E 13°	50.5	15
	5° < E 10°	44.6	30
	2° E 5°	38.4	15
Final approach and take-off area lights and aiming point lights	0°	83.1	10
	3°	106.7	100
	10°	145.2	100
	20°	163.9	100
	25°	182.2	50
	30°	180.5	10



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road, Delhi-110015, India

+91-9818295444

IT: +91-11-45710588



contact@vardhmanairports.com

www.vardhmanairports.com

CIN U62100DL2014PTC263759

This Page is intentionally Left Blank



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India



+91-9818295444 IT: +91-11-45710588



contact@vardhmanairports.com



www.vardhmanairports.com

CIN U62100DL2014PTC263759