


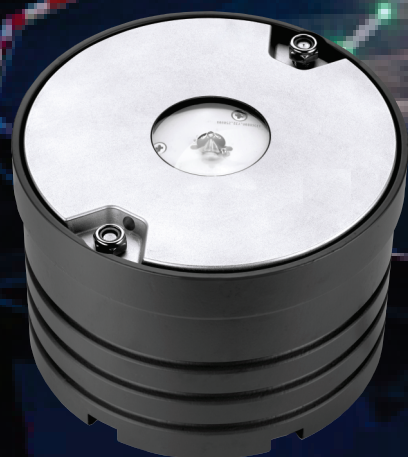

Heliport Inset Light

Medium Intensity, Omni-directional, Inset Light

VAS-HP-I-L

Heliport Inset light

- Heliport Inset light is always be installed at locations where the lights are frequently knocked down by aircraft or maintenance vehicles.
- It could be used as Aiming point light, perimeter light of FATO (Final approach and take-off areas), TLOF (Touchdown and lift-off areas), taxiway, Flight path alignment guidance lighting, etc. The emitting color is green or yellow or white or blue.

8inch International standard mounting for aerodrome inset light.

Compliance with Standards

- ICAO Annex 14 Volume II Heliports Chapter 5
- FAA AC 150/5390-2B Heliport Design Guide

Application

- Helipad/Heliport FATO areas
- Heliport FATO areas
- Helipad Runway
- Helipad taxiway
- Aiming point light



Features

Electrical

- Ultra high intensity CREE LED as light source saving power consumption and maintenance, 95% less power than equivalent incandescent light
- Power supply available in AC (110-240VAC), DC 48V 2.8A to 6.6A.

Physical

- Pressure resistance lens allowed the vehicles go through on light.
- Die-casting aluminum covered by powder coated anodized which have good corrosion protection and load bearing.



- IP 67 waterproof ensure light work fine underground

Optional


- Infrared LED for pilot using NVG (Night Vision Goggles)
- Controller for power supplying and turn ON/OFF light
- VHF pilot to ground remote control
- Light intensity adjustable
- Solar Power System



Dimensions

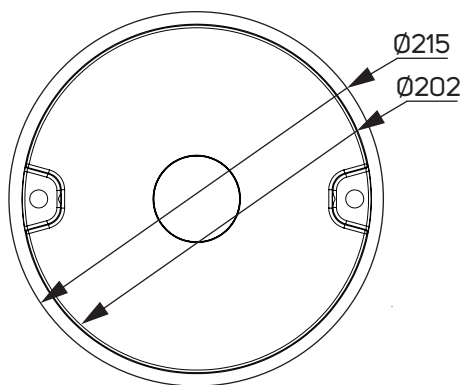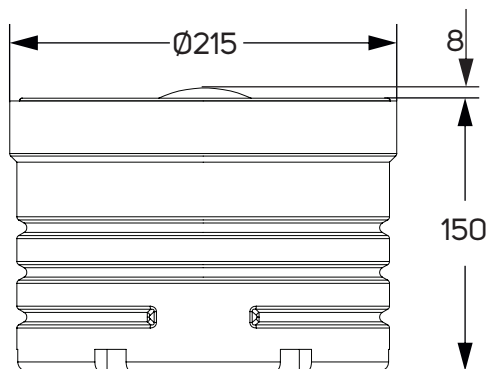

Installation Diagram

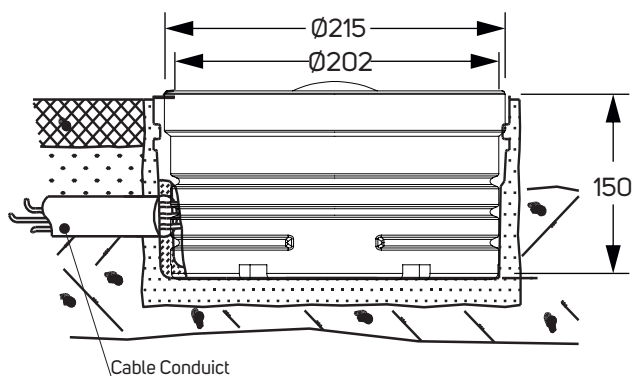

Mounting Container is included in our offer

Technical Specification

SPECIFICATIONS	VAS-HP-I-L
Light Characteristics	
Light Source	CREE Ultra high intensity LED
Available Colors	Green, White, Yellow, Blue, Red
Intensity(cd)	ICAO standard, refer to Photometric table
Horizontal Degree(°)	Omni direction (360°)
Vertical Degree(°)	ICAO specification
Operation Mode	24hours operation
LED Life Experience(hours)	>100,000
Flash Characteristics	Steady burning
Electrical Characteristics	
Operating Voltage	110-240VAC, 48VDC, 24VDC or 2.8A to 6.6A
Power(W)	≤8.5W
Physical Characteristics	
Body Material	Die-casting aluminum
Overall size(mm)	Ø200x100
Installation size(mm)	Ø215x150-M10*2
Weight(kg)	4kg
Product Life Expectancy	≥10 years
Environmental Factors	
Ambient Temperature(°C)	-55~70
Humidity	0~100%
IP Index	IP 67
Compliance	
ICAO	ICAO Annex 14 Volume II Heliports 5.3
Options Available	
Infrared LED compatible for NVG (Night Vision Goggles) Light intensity adjustable VHF pilot to ground remote control Solar Power System	

Heliport Lighting on roof of building



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India



+91-9818295444

IT: +91-11-45710588



contact@vardhmanairports.com



www.vardhmanairports.com

CIN U62100DL2014PTC263759

Model Configuration

VAS-HP-I-TLOF-G-L

L = Led

G = Green

W = White

IR = Infrared

B = Blue

TLOF = Touchdown and lift-off area lighting

FPAG = Flight path alignment guidance lighting

FATO = Final approach and take-off area lighting

AP = Aiming point Light

HPI = Heliport Lighting

TAX = Taxiway Light

I = Inset

HP = Heliport

VAS = Vardhman

Application	Colors
TLOF	G
FPAG	W
FATO	W
AP	W
HPI	IR
TAX	B

Photometric Data

Application	Vertical Degree(°)	Average Light Intensity (cd)	ICAO Standard
Touchdown and lift-off area lighting	20° < E 90°	27.1	3
	13° < E 20°	54.6	8
	10° < E 13°	50.5	15
	5° < E 10°	44.6	30
	2° E 5°	38.4	15
Flight path alignment guidance lighting	20° < E 90°	66.6	3
	13° < E 20°	158.7	8
	10° < E 13°	149.3	15
	5° < E 10°	137.9	30
	2° E 5°	109.9	15
Final approach and take-off area lights and aiming point lights	0°	83.1	10
	3°	106.7	100
	10°	145.2	100
	20°	163.9	100
	25°	182.2	50
	30°	180.5	10



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road, Delhi-110015, India



+91-9818295444

IT: +91-11-45710588



contact@vardhmanairports.com



www.vardhmanairports.com

CIN U62100DL2014PTC263759