



Approach, Siderow Barrette, Threshold, Wingbar & End Light LED

High Intensity, uni-directional, Elevated Light
VAS-APL-L, VAS-APS-L, VAS-RTL-L, VAS-RWB-L, VAS-REN-L

Compliance with standards

- ICAO Annex 14, Volume 1 / ADM DOC 9157 Part 5&4
- DGCA CAR Series B Part-I Section 4
- FAA AC-150/5345-46F
- FAA Engineering Brief 67D

Application

- High-intensity, Uni-directional, Elevated Runway Approach, Threshold, Threshold Wingbar & Runway End lights used in SAPL & ICAO category I, II & III runways. Siderow Barrette used in ICAO category II & III runways.

Performance

- Power Factor: >0.9
- Environmental Temp. -25°C to +55°C
- Energy Consumption 48W
- Lights can withstand with Jet Blast & High Wind Pressure (Wind load-480km/h).

Electrical supply

- Suitable for use in 6.6A airfield lighting circuits.
- Isolation Transformer 65W


Features

- Dimming Curve is as per ICAO Design Manual Part-5 and FAA EB 67D
- Aluminium alloy body- light weight, corrosion-resistant & powder coated for environmental protection.
- Provision for vertical beam adjustment from 0° to 25° and horizontal beam adjustment at each side from 0° to 20°.
- Angle setting tool available as an option.
- Frangible coupling to ensure flight safety.
- Design for easy replacement of LED Module from the front side without disturbing or opening the internal circuitry.
- LED's life is greater than 50,000 hours.
- Alignment is not required after replacement of LED Module.
- Smooth outer glass surface resists build up of dirt and is easy to clean.
- Low spares inventory for all types of light fittings. The only difference is color filter.




Photometric Data


Approach Center & Crossbar Light

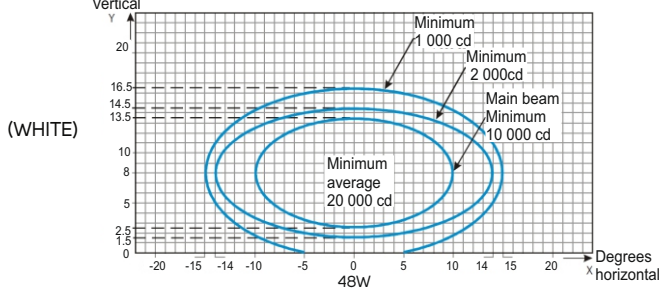


Approach Siderow Light

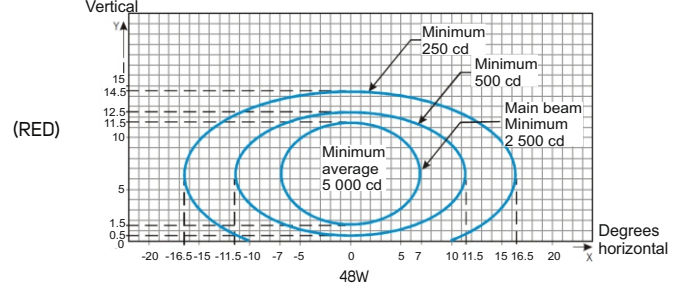


Threshold Light

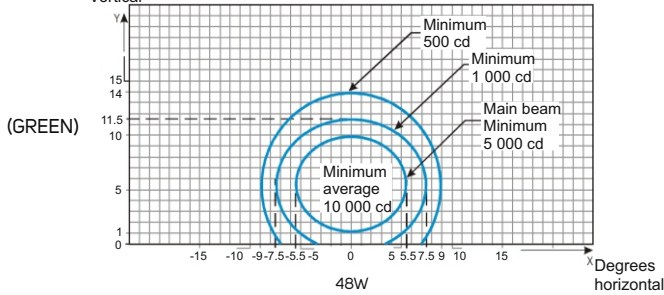

Threshold Wingbar Light

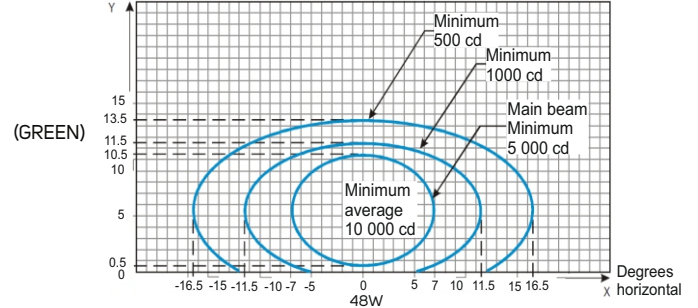


Runway End Light

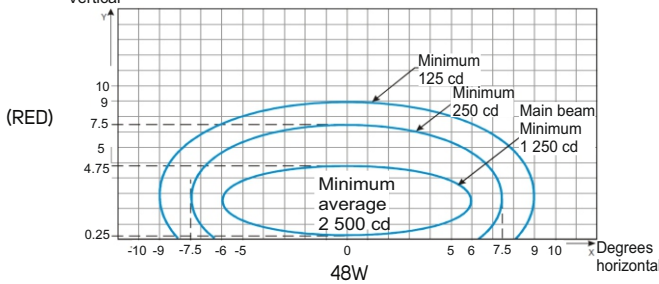

Light Type	Standard	Main beam		Color	Specs. Min. Average Cd	Actual Average Cd
		H	V			
Approach Center & Crossbar Light	ICAO fig. A2-1	$\pm 10^\circ$	$2.5^\circ - 13.5^\circ$	White	20000	23775
Approach Siderow Light	ICAO fig. A2-2	$\pm 7^\circ$ (Toe in 2°)	$1.5^\circ - 11.5^\circ$	Red	5000	6130
Threshold Light	ICAO fig. A2-3	$\pm 5.5^\circ$ (Toe in 3.5°)	$1^\circ - 10^\circ$	Green	10000	11854
Threshold Wingbar Light	ICAO fig. A2-4	$\pm 7^\circ$ (Toe in 2°)	$0.5^\circ - 10.5^\circ$	Green	10000	11251
Runway End Light	ICAO fig. A2-8	$\pm 6^\circ$	$0.25^\circ - 4.75^\circ$	Red	2500	3294
Chromaticity	ICAO Annex. 14 Fig A1-1b					

Installation

- The Light fixture can be installed on Pipe Elbow, C.I./M.S box and Pole.

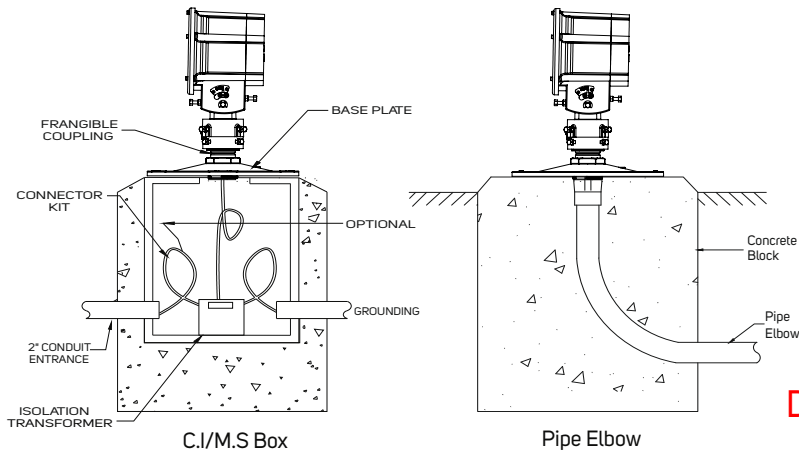

Ordering information

VAS-APL-L

L = Led

APL = Approach center & crossbar light

RTL = Runway threshold light



RWB = Runway wingbar light

REN = Runway end light

APS = Approach siderow light

VAS = VARDHMAN


Dimensions

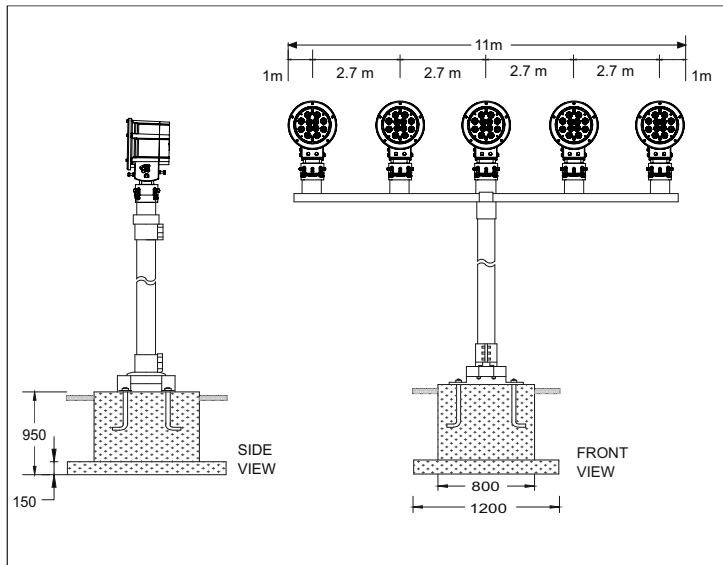

Elevated Installation

Packaging data

- Net Weight 5.7 kg
- Gross Weight 5.9 kg
- Box Size 178 (L) x 160 (W) x 300 (H) (in mm)

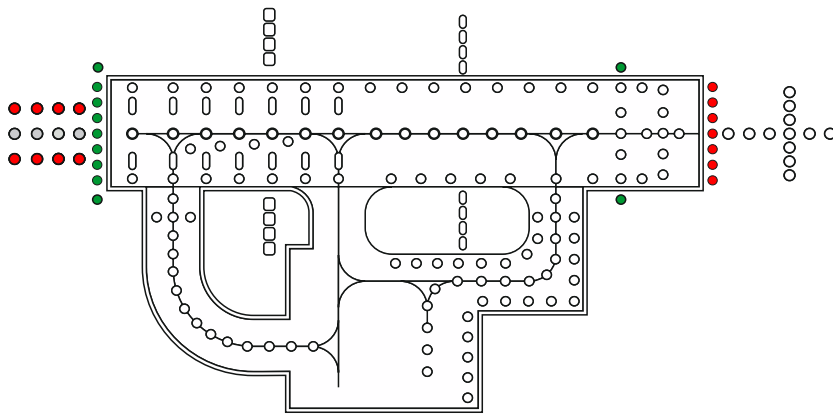

ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road, Delhi-110015, India



+91-9818295444 IT: +91-11-45710588



contact@vardhmanairports.com



www.vardhmanairports.com

CIN U62100DL2014PTC263759

Ver. 1.0

Rev. 1.2 / Oct-2025 Product specifications and pictures may slightly vary and are not binding. We reserve the right to revise or upgrade the specification for improvement.

Components

Sr. No.	Parts Name	Parts Code	Sr. No.	Parts Name	Parts Code
1	Front Ring	VASALU023	7	Driver for White	VASDRI005
2	Glass	VASGLS021		Driver for Green	VASDRI006
3	Gasket	VASRUB008		Driver for Red	VASDRI007
4	LED Module White	VASMP011	8	Gasket - Rear Cap	VASRUB009
	LED Module Green	VASMP012	9	Rear Cap	VASALU024
	LED Module Red	VASMP013	10	Gland -PVC (PG 11)	VASHAR087
5	Housing	VASALU022	11	Pole	VASALU025
6	Transformer for White/Green	VASTTF003	12	Indexing Ring	VASALU016
	Transformer for Red	VASTTF002	13	Frangible Coupling	VASALU046
			14	Base Plate	VASALU007
			15	Secondary Cable	VASLEA004

