

Primary Connectors



VAS-PC

Compliance with standards

- ICAO: Aerodrome Design Manual 9157 Part 5
- FAA: AC150/5345-26 (L-823)


Description

- Plug and Receptacle, Type 1, Class B, 6 and 16 sq. mm style 3 & 10

Features

- Connector are resistant to abrasive chemicals and all weather conditions.
- Impact resistance, fatigue resistance, tear strength, high friction resistance, and other mechanical properties with high performance.
- FAA L-823 style 3 Plug & style 10 Receptacle are used.
- Quick on-site installation.
- Excellent watertightness.

Outline Diagram

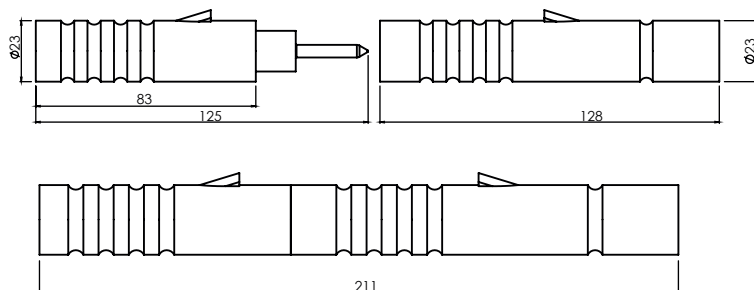

Application

Primary Connectors are designed for a fast-and-easy watertight connection between the primary cable and the series isolating transformers.

Performance

- Working Temperature between -55° to 65° Degree.

Electrical supply

- Upto 25A, 5000V.

Test Reports

MSME-TC, Guindy, Chennai
Test report No: 24003908 & 24003909 Dated 24/07/2024

Part List

- Plug Body
- Pin
- Receptacle Body
- Socket with Sleeve
- Grease
- Go & No Go gauge

Dimensions of Connectors and Cables

Connector	Type	Conductor size	Cable Size
VAS PR 1	Receptacle	6 sq. mm	10 to 13.5 mm
VAS PP 1	Plug	6 sq. mm	10 to 13.5 mm
VAS PR 3	Receptacle	16 sq. mm	14 to 17 mm
VAS PP 3	Plug	16 sq. mm	14 to 17 mm

