



Runway Edge Light LED with Circling Guidance (Optional) L-861, L-862

High Intensity, Bi-directional, Elevated Light

VAS-REL-L

Compliance with standards

- ICAO Annex 14, Volume 1 / ADM DOC 9157 Part 5
- DGCA CAR Series B Part-I Section 4
- FAA AC-150/5345-46F
- FAA Engineering Brief 67D

Application

- High intensity, Bi-directional, Elevated Runway Edge lights that can be used for category I, II & III systems for Runways width of 45M as well as of 60M.

Performance

- Power Factor: >0.9
- Environmental Temp. -25°C to +55°C
- Energy Consumption 40W
- Lights can withstand with Jet Blast & High Wind Pressure (Wind load-485km/h).

Electrical supply

- Suitable for use in 2.8 to 6.6A airfield lighting circuits.
- Isolation Transformer 45W

Features


- Aluminium alloy body- light weight, corrosion-resistant & powder coated for environmental protection.
- Frangible coupling to ensure flight safety.
- Proprietary driving circuit and thermal management solutions, which greatly improves the reliability and service life of light fixture.
- Color (White/Yellow/Red) emitted directly by LEDs.
- LED life up to 50000 hours as per LM-80.
- Easy to replace LED Module and no optical adjustment required.
- Modular design for easy handling and maintenance.

Circling Guidance (optional)


- Runway Edge Light With Circling Guidance is available on request.

Dimensions

- REL With CG -350(h) x 304(w)
- REL -336(h) x 304(w)

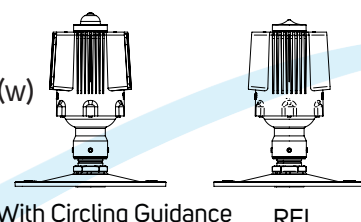


Photometric Data

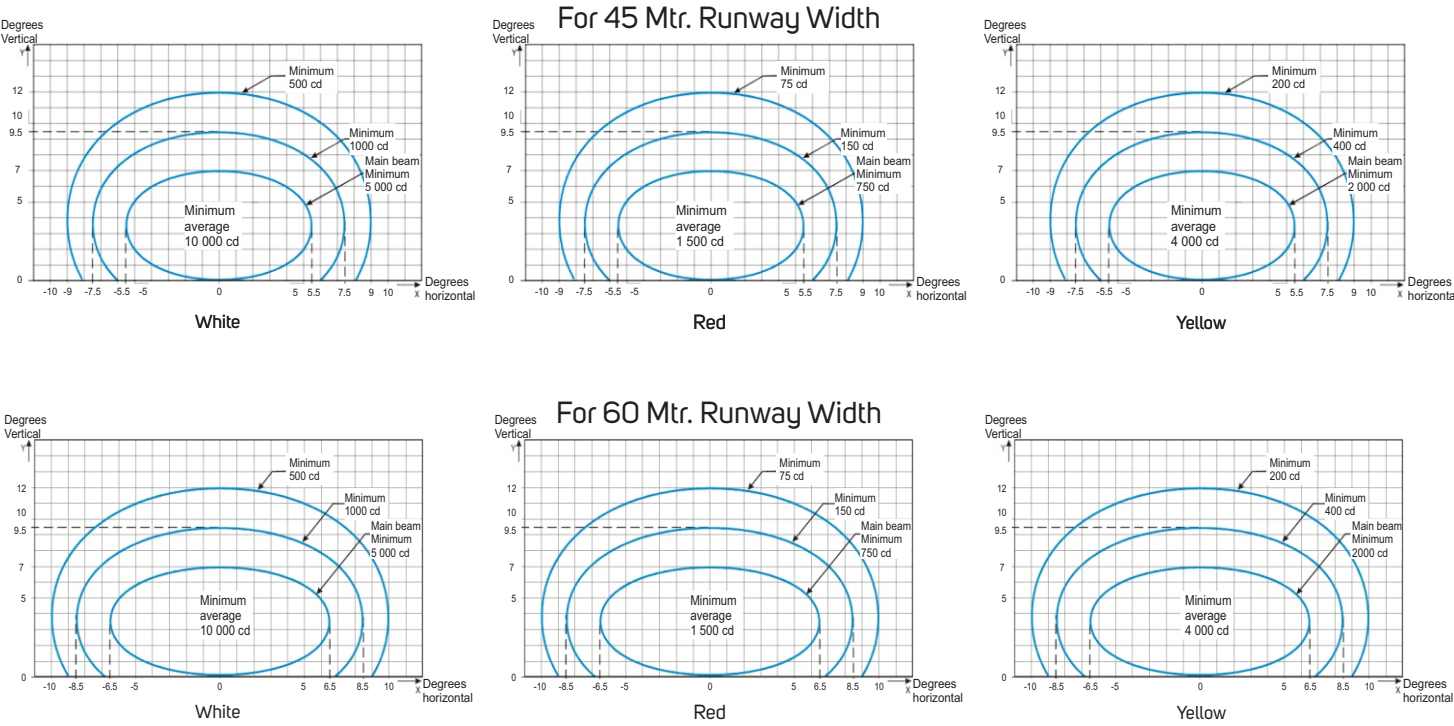

Standard	Main beam		Color	Required Min. Average Cd	Actual Average Cd	Omni Required Min. Average Cd
	H	V				
ICAO Fig. A2-9 (width 45 Mtr.)	$\pm 5.5^\circ$ (Toe in 3.5°)	0-7°	White	10000	11520	50
ICAO Fig. A2-10 (width 60 Mtr.)	$\pm 6.5^\circ$ (Toe in 4.5°)		Red	1500	1524	
			Yellow	4000	6780	

Installation


- The Light fixture can be installed on pipe elbow & C.I box.

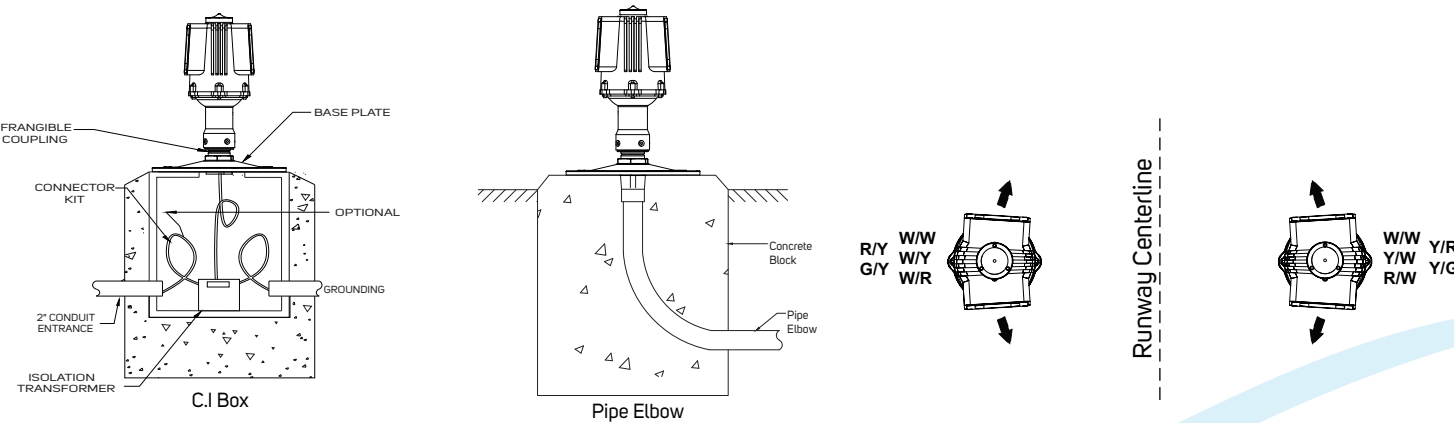

1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India
+91-9818295444 IT: +91-11-45710588
contact@vardhmanairports.com
www.vardhmanairports.com

CIN U62100DL2014PTC263759

Installation

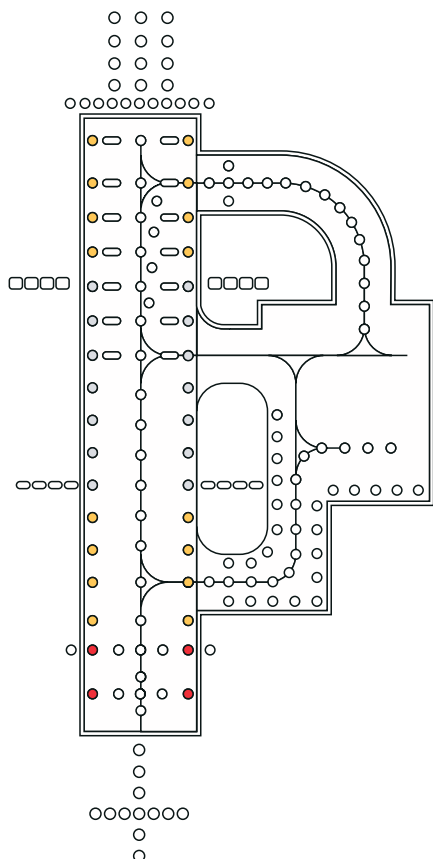

Ordering information

VAS-REL-X/X-L-X

X = 1/2

1 = Without CG

2 = With CG

L = Led

X/X = W/W, W/Y, W/R, R/Y

REL = Runway edge light


VAS = Vardhman

Packaging data

- Net Weight 5 kg (Approx)
- Gross Weight 5.25 kg (Approx)
- Box Size 175 (l) x 170 (w) x 320 (h) (in mm)

Components

S No.	Part Name	Part Code	S No.	Part Name	Part Code
1	Clamp Ring	VASALU078	9	Housing pole	VASALU077
2	Flat Glass	VASGLS017	10	Waterproof Gland	VASHAR087
3	Clamp Ring Gasket	VASRUB010	11	Frangible Coupling	VASALU005
4	LED Module White	VASMPCC006	12	Base Plate	VASALU007
	LED Module Yellow	VASMPCC007	13	Secondary Cable	VASLEA004
	LED Module Red	VASMPCC008	14	CG Dome Ring (Optional for Circling Guidance)	VASALU010
	LED Module Green	VASMPCC009	14.1	Top Cover	VASALU079
5	Main Housing	VASALU076	15	Top Cover Gasket	VASRUB019
6	Transformer	VASTTF002	16	CG Dome (Optional for Circling Guidance)	VASGLS020
7	Driver	VASDRI008	17	CG Dome Gasket (Optional for Circling Guidance)	VASRUB017
8	Housing Pole Gasket	VASRUB009	18	CG LED Module (Optional for Circling Guidance)	VASELC023

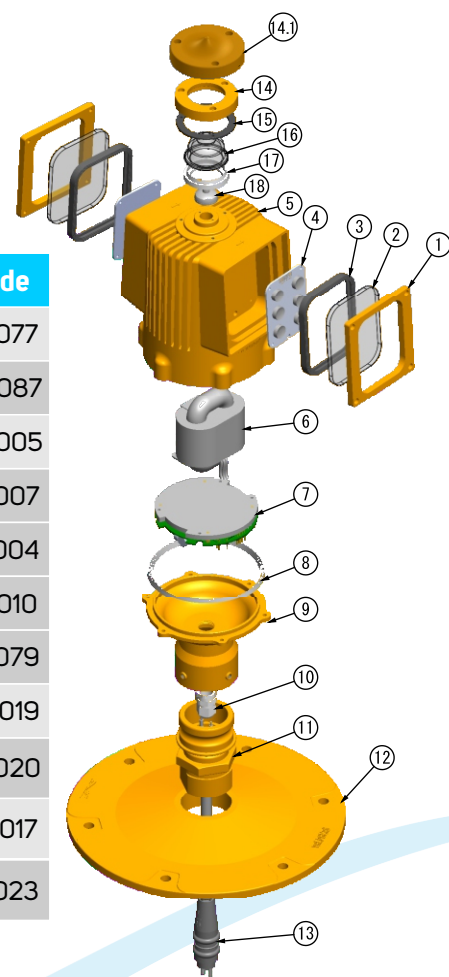

This Page is intentionally Left Blank



ISO 9001:2015 Certified Company



1st & 2nd Floor, Plot No. 13/C & 13/3, Rama Road Side, Industrial Area, Najafgarh Road , Delhi-110015, India



+91-9818295444 IT: +91-11-45710588



contact@vardhmanairports.com



www.vardhmanairports.com

CIN U62100DL2014PTC263759

Ver. 1.0

Rev. 1.2 /Oct-2025 Product specifications and pictures may slightly vary and are not binding. We reserve the right to revise or upgrade the specification for improvement.