


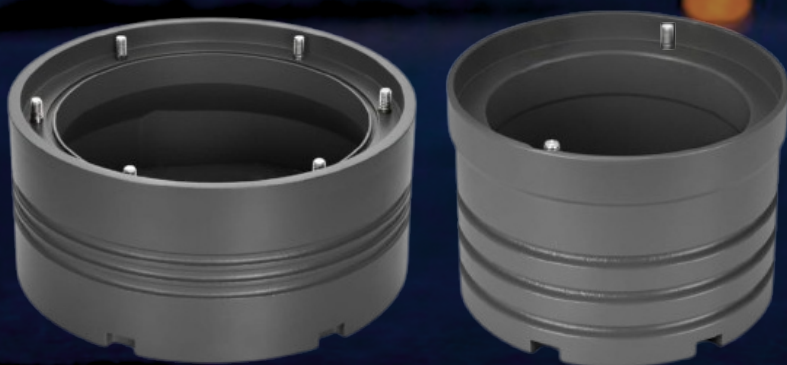

Inset 8-inch or 12-inch Shallow Base

VAS-SB-X

Compliance with standards

- ICAO Annex 14, Volume 1
- FAA AC 150/5345-42G
- IEC TS 61827

Application


- For the installation of Inset light fixtures

Specifications


- Shallow Base Size $\varnothing 8"$, $\varnothing 12"$
- Protection Class IP 68
- Temperature -40°C to $+55^{\circ}\text{C}$
- Material Aluminium

Dimensions

Shallow Base Size	PCD	ID	OD	H
$\varnothing 8"$	$\varnothing 184$	$\varnothing 205$	$\varnothing 215$	150
$\varnothing 12"$	$\varnothing 286$	$\varnothing 308$	$\varnothing 330$	150



(Top View)



(Side View)

Features

- The shallow base is designed for installing in situ by means of epoxy-resin secured in a core that has been drilled in the pavement or into a precast concrete block. With the dry base option, a gasket (separately supplied) must be placed between base and fixture for water tightness. All hardware for fixing, screw and washer, are in stainless steel.
- With this type of shallow base installation, the isolating transformer used to power the fixture, along with the primary circuit connectors, are typically located in a pit at the edge of the runway or taxiway. The light is powered by means of a secondary cable being installed from the pit to the light base.
- The base cans are designed in compliance with the mechanical and environmental requirements of IEC 61827 and the FAA AC 150/5345-42 specifications.

Ordering information

VAS-SB-X
 X = $\varnothing 8"/\varnothing 12"$
 SB = Shallow Base
 VAS = VARDHMAN

Packaging

- Net weight 4.230Kg
- Gross weight 4.265 (boxed)
- Box 250mm (L) x 250mm (W) x 180mm (H)

