



Taxiway Edge Light-Halogen

Medium-Intensity, Omni-Directional,
Elevated Lights

VAS-TXE-Halogen

Compliance with standards

ICAO	Annex 14 Volume-I
DGCA:	CAR Section 4 Part-I
IS:	IS 7785 Part I & VI
FAA:	AC 150/5345-46 (L-861T)

Features

- Aluminium alloy body- light weight, corrosion-resistant & powder coated.
- Smooth outer dome eliminates the build-up of dirt & easy to clean.
- Lamp life is greater than 1000 hours at 6.6A.
- 5-step constant current operation.
- Main beam range Horizontal 360°, Vertical: 0-6°.
- Three-screw levelling with hex head bolts.
- Innovative design for ease of installation and maintenance SS belt secures glass dome to housing, and allows for quick access to power supply and optical assembly.

Packaging data

- Net Weight 1.6 kg
- Gross Weight 1.8 kg
- Box Size 175 mm (l) x 170mm (w) x 285mm (h)

Applications

Medium-Intensity, Omni-directional, Elevated Taxiway Edge Halogen Lights that can be used in SAPL & ICAO category I, II & III runways.

Performance

- Relative Humidity: ≤95%
- Environmental Temperature : -25°C to +55°C.
- Lights can withstand with Jet Blast & High Wind Pressure.


Electrical supply

- Suitable for use in 6.6A airfield lighting.

Color	Lamp	Transformer
Blue	45W	45W


Dimension

- Dimension:- 330 (H) x 304 (W)



Photometric Data


Taxiway Edge Light

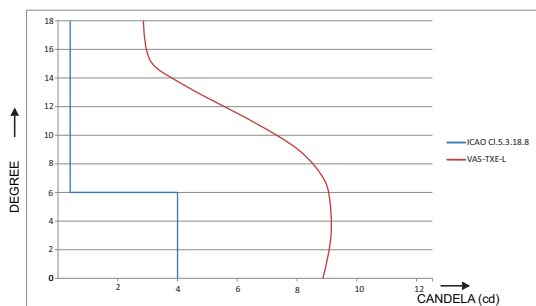

Application	Main beam		Required Min. Average Cd	Actual Average Cd
	H	V		
ICAO Clause 5.3.18.8	360°	0°-6°	2cd	>8cd
	360°	6°-75°	0.2cd	>0.2cd

Components

S No.	Part Name	Order Codes	S No.	Part Name	Order Codes
1	Glass Dome	TXE-H001-0001	6	Junction Holder	REL-H001-0022 C
2	Dome Belt	REL-H001-0025	7	Housing Base	REL-H001-0003A
3	Housing Gasket	REL-H001-0002	8	Housing Pole	REL-H001-0003B
4	Bi-Pin Lamp-45W	TXE-H001-0035	9	Frangible Coupling	TXE-L001-0005
5	Lamp Holder	REL-H002-0022D	10	Base Plate	TXE-L001-0007

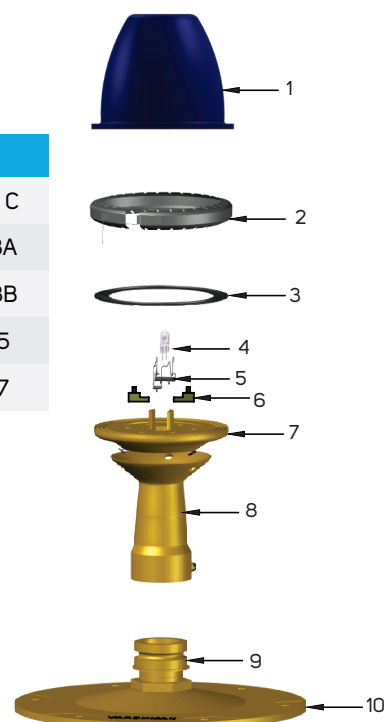

Installation

- The Light fixture can be installed on Pipe Elbow & C.I/M.S box

