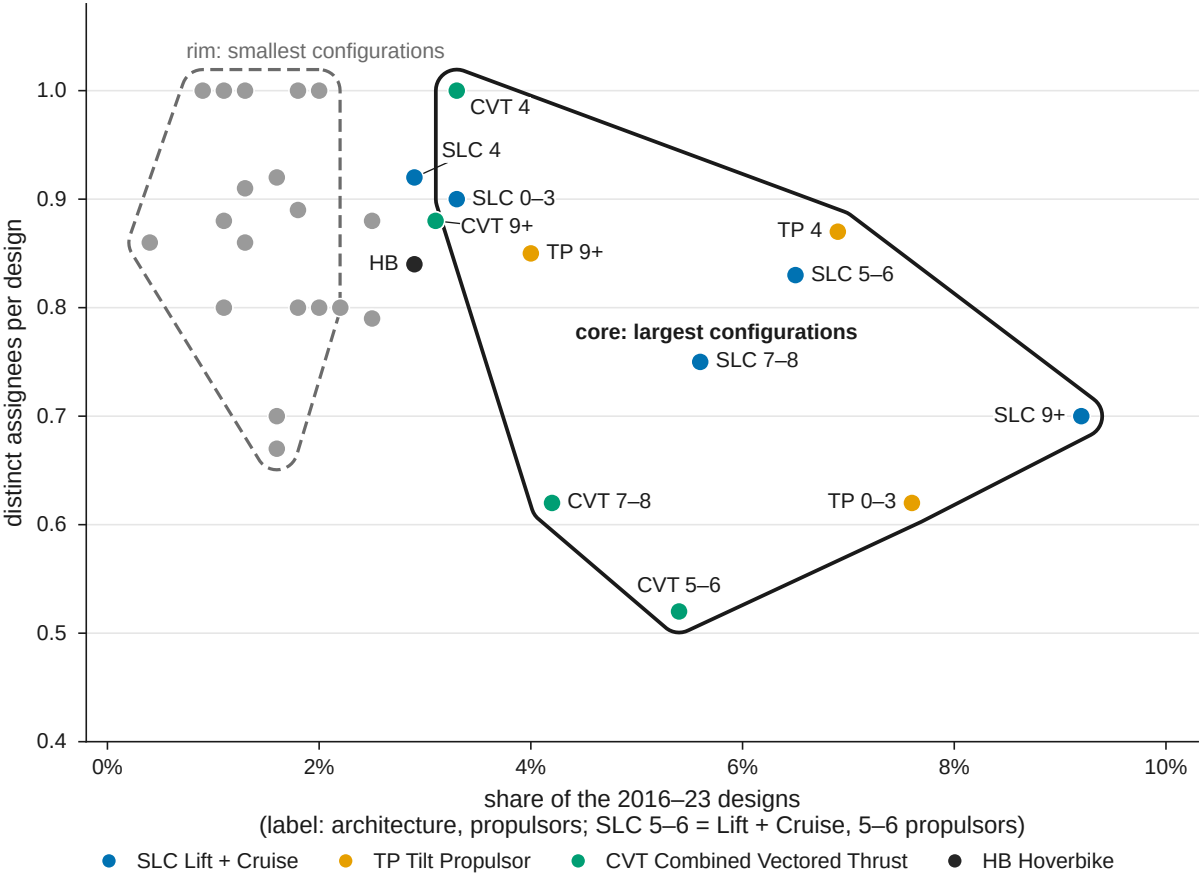
rim: smallest configurations
CVT 4
SLC 4
SLC 0–3
CVT 9+
HB
TP 9+
TP 4
SLC 5–6
core: largest configurations
SLC 7–8
SLC 9+
CVT 7–8
TP 0–3
CVT 5–6
distinct assignees per design
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0%
2%
4%
6%
8%
10%
share of the 2016–23 designs
(label: architecture, propulsors; SLC 5–6 = Lift + Cruise, 5–6 propulsors)
SLC Lift + Cruise
TP Tilt Propulsor
CVT Combined Vectored Thrust
HB Hoverbike