



टिका रहे  
टिकाए रखें !



# About Tikawoo

Tikawoo believes in the **Power of connections**. Not just the connections that hold pieces of wood together, but the connections that bind carpenters, dealers, distributors, and their dreams together.

Tikawoo is more than just a wood adhesive brand that understands a strong bond is not just about sticking wood together but about creating lasting relationships.

We are always committed to putting **people before profits**. For Tikawoo, our customers are not just buyers but partners in our journey of success. We listen to their needs, understand their challenges, and work tirelessly to provide solutions that make their lives better.

Every product we create is a testament to our dedication to quality, reliability, and care.

## Tikawoo relationships that help stay relevant:

**Carpenters:** Retaining the pride of being an expert

**Dealers:** Retaining the pride of being a good businessman

**Customers:** Retaining the pride of having good taste in furniture



# BOND TIK

## SYNTHETIC WOOD ADHESIVE



Ultimate  
Bonding



Heat  
Resistance



Better  
Coverage



Fungus  
Resistance



Rapidly  
Solidifies

### Salient Features

- Single component-ready to use adhesive
- Suitable for cold press bonding
- Excellent bonding with wood veneers, craft materials, paper, MDF, HDF, etc.
- Non-hazardous, non-flammable, smell-free.

### Applications

- Adhesion of craftwork
- Wood-to-wood bonding
- Plywood to veneer bonding
- General construction bonding

### Properties

• Bulk Density (ASTM D 1475)	: 1.06 g/cc
• Early Strength (IS 4835)	: >250 KG
• Glue Joint Strength (IS 4835)	: >300 KG
• Coverage	: Approx 150 g/m <sup>2</sup>
• Solid Content (%)	: 43.5 ± 2
• PH - Value	: 3.0 - 6.0
• Bond Strength	: Min 250 kg/sq.inch

### Packaging

- Pouch - 1kg
- Plastic Pail Pack - 125g, 250g, 500g, 1kg, 2kg, 5kg
- Bucket - 10kg, 20kg
- Drum - 50kg, 60kg

# AQUATIK

## WATER RESISTENCE ADHESIVE



Water  
Resistance



Heat  
Resistance



Better  
Coverage



Fungus  
Resistance



Saves  
Cost

### Salient Features

- Single component-ready to use adhesive
- Resistance to heat, moisture, and fungus
- Better coverage
- Excellent bonding with wood veneers, marine plywood, MDF, HDF, etc.
- Non-hazardous, smell free

### Applications

- General construction bonding
- Wood to wood bonding
- Plywood to veneer bonding
- Excellent adhesive for waterproofing furniture

### Properties

• Bulk Density (ASTM D 1475)	: 1.06 g/cc
• Early Strength (IS 4835)	: >280 KG
• Glue Joint Strength (IS 4835)	: >320 KG
• Coverage	: Approx 140 g/m <sup>2</sup>
• Solid Content (%)	: 47.5 ± 2
• PH - Value	: 3.0 - 6.0
• Bond Strength	: Min 280 kg/sq.inch

### Packaging

- Pouch - 1kg
- Plastic Pail Pack - 500g, 1kg, 2kg, 5kg
- Bucket - 10kg, 20kg
- Drum - 50kg, 60kg

**Drying time may vary based on weather conditions.**

# FASTTIK

## FAST DRYING WOOD ADHESIVE



- |   |                        |   |                        |   |                     |   |                   |   |                              |
|---|------------------------|---|------------------------|---|---------------------|---|-------------------|---|------------------------------|
|  | <b>Powerful Binder</b> |  | <b>Heat Resistance</b> |  | <b>Fast Bonding</b> |  | <b>Pest Proof</b> |  | <b>Saves Cost &amp; Time</b> |
|---|------------------------|---|------------------------|---|---------------------|---|-------------------|---|------------------------------|

### Salient Features

- Single component-ready to use adhesive
- Resistance to heat, moisture, and fungus
- Better coverage
- Excellent bonding with wood veneers, marine plywood, MDF, HDF, etc.
- Non-hazardous, smell free

### Applications

- General construction bonding
- Wood to wood bonding
- Plywood to veneer bonding
- Excellent adhesive for waterproofing furniture

### Properties

• Bulk Density (ASTM D 1475)	: 1.06 g/cc
• Early Strength (IS 4835)	: >300 KG
• Glue Joint Strength (IS 4835)	: >340 KG
• Coverage	: Approx 140 g/m <sup>2</sup>
• Solid Content (%)	: 47.5 ± 2
• PH - Value	: 3.0 - 6.0
• Bond Strength	: Min 280 kg/sq.inch

### Packaging

- Pouch - 1kg
- Plastic Pail Pack - 500g, 1kg, 2kg, 5kg
- Bucket - 10kg, 20kg
- Drum - 50kg, 60kg

# ULTRA-SUPERTIK

WATERPROOF PREMIUM ADHESIVE WITH  
STRONG PERFORMANCE

- |  |                              |   |                        |   |                        |   |                          |
|--|------------------------------|---|------------------------|---|------------------------|---|--------------------------|
|  | <b>High Water Resistance</b> |  | <b>Heat Resistance</b> |  | <b>Better Coverage</b> |  | <b>Fungus Resistance</b> |
|--|------------------------------|---|------------------------|---|------------------------|---|--------------------------|



### Salient Features

- Single component-ready to use adhesive
- Resistance to moisture, heat, fungus, and termite
- Fast setting, instant grab, and better performance
- Excellent bonding with wood veneers, marine plywood, MDF, HDF, etc.
- Non-hazardous, smell free
- Suitable for hand and exotic work

### Properties

• Bulk Density (ASTM D 1475)	: 1.06 g/cc
• Early Strength (IS 4835)	: >320 KG
• Glue Joint Strength (IS 4835)	: >350 KG
• Coverage	: Approx 140 g/m <sup>2</sup>
• Solid Content (%)	: 47.5 ± 2
• PH Value	: 3.0 - 6.0
• Bond Strength	: Min 280 kg/sq.inch

### Packaging

- Plastic Pail Pack - 500g, 1kg, 2kg, 5kg
- Bucket - 10kg, 20kg
- Drum - 50kg, 60kg

### Applications

- General construction bonding
- Wood to wood bonding
- Plywood to laminate bonding
- Excellent adhesive for waterproofing furniture

# PROFIX

PVC TO WOOD ADHESIVE



## SPECIALISED ADHESIVE FOR PVC TO WOOD & ACRYLIC

### Salient Features

- Single component- ready to use adhesive
- Excellent bonding for PVC and acrylic sheets
- Excellent spread, high coverage and strong bonding

### Applications

- Plywood to PVC sheets
- Plywood to acrylic sheets
- PVC edge bonding
- Acrylic to wood

### Properties

- |  |  |
|--|--|
| • Glass Transition Temperature : Approx 5C (DCS) |  |
| • Bulk Density (ASTM D 1475) : 1.05 g/cc         |  |
| • Coverage : Approx 120 g/m <sup>2</sup>         |  |
| • Solid Content(%) : 56 ± 2                      |  |
| • PH - Value : 2.0 - 6.0                         |  |

### Packaging

- Bottle - 500g
- Plastic Pail Pack - 1kg, 2kg, 5kg
- Bucket - 10kg, 20kg
- Drum - 50kg, 60kg

# TIKBond

MULTIPURPOSE ADHESIVE



Multipurpose



High Performance



Non-toxic



Easy to use




All New  
Multipurpose  
Adhesive

## Easy to Use, No Mess!



टिका रहे टिकाए रखें !

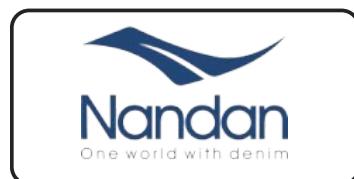

Manufactured & Marketed By:  
**HEXA BIOCHEM PRIVATE LIMITED**

Vraj Integrated Textile Park, Plot No.  
08, Phase-II, NH-8 Bareja, Kheda,  
Ahmedabad- 387120, Gujarat

Marketing Office:  
**HEXA BIOCHEM PRIVATE LIMITED**

Chiripal House, 1st Floor,  
Shivranjani Cross Road, Satellite,  
Ahmedabad- 380015, Gujarat

Follow Us on



[www.tikawoo.com](http://www.tikawoo.com)



+91 95123 57777



[care.tikawoo@chiripalgroup.com](mailto:care.tikawoo@chiripalgroup.com)

DOWNLOAD OUR  
APPLICATION FROM  
PLAYSTORE

