

# An example *Geophysics* article, with a two-line title

*Joe Dellinger\* and Sergey Fomel†*

## ABSTRACT

This is an example of using `geophysics.cls` for writing *Geophysics* papers.

## INTRODUCTION

FWI is most efficient seismic inversion method (Pratt and Shipp, 1999; Schuster, 2017; Tarantola, 1986; Virieux and Operto, 2009) due to its ability to use all the seismic phases present in the seismic data. This involves the synthetic and observed data comparison (Gómez and Pestana\*, 2017; Liu et al., 2017; Métivier et al., 2018) known as objective function. The reate of change of objection fuction with model parameters (Plessix, 2006) help to update the model until the synthetic data corresponding to the updated model satisfy the stopping criteria.

FWI is a nonlinear optimization problem (Crase et al., 1990; Geng et al., 2018; Guo et al., 2021), having a large number of localized minima and maxima (ten Kroode et al., 2013) as shown in FIGURE, because of the non linear relation between the synthetic data and model parameters. This characteristic of objective function might be responsible for FWI to stuck in local minima if the starting model is not lie within the basin of attraction (Fitchner, ETH). FWI is based on caluclas based optimization mehtods which have the tendency to move towards the nearest extrema this make it imposible to converge to global minima if starting model is in localized basin of attraction. This make it necessary to start the inversion with a initial model located near to the global minima.

Since the formulaisation of the FWI it have been gone through a long journey of developemnts to deal with challenges assiciated with the non-linearity by moodifyng the objective funtion such as multiscale strategy (Bunks et al., 1995; Ravaut et al., 2004; Schäfer et al., 2014; Sirgue and Pratt, 2004) focusing on low frequency data for initial inversions and gradually increase to the high frequencies, normalized cross-correlation objective function (Chi et al., 2015; Liu et al., 2017) focus on matching of phases to mitigate the effect of amplitudes, envelope-based objective function (Borisov et al., 2018; Chi et al., 2014) for updating long-wavelength models, and most recent optimal transport function (Brossier et al., 2016; Métivier et al., 2016, 2018) increases the convexity of the basin of attraction which increase the chance of falling the initial model in the basin of attraction of global minima. Global optimization methods

(Arora et al., 1995; Locatelli and Schoen, 2021; Törn and Žilinskas, 1989) are also proposed to deal with non-linearity by prepping the initial model. These methods are inspired with the natural phenomena. In geophysics, very fast simulated annealing (VFSA), genetic algorithm (GA), and particle swarm optimization (PSO) are most commonly used methods for seismic inversion. These methods have the ability to explore all the available search space to find a optimal solution this supermacy of global optimization motivated its utilization in prepsring the starting model for calculus based seismic inversion methods. the idea of preparing the initial model with the global optimization is because of the high exploration and slow exploitation of these methods. once the initial model is prepared with the confidence that it lie in the basin of global minima then local optimization statred with this model because local minima methods have high exploitation rate. Datta and Sen (2016) used the VFSA for prepping the initial model in this two step process, parameterization of model is accomplished by the zero offset section, Fu et al. (2021) proposed a paralld VFSA algorithm for 1.5D acoustic FWI where model parameters are simultaneously updated across multiple threads, Shiba and Irikura (2005) implemented the VFSA algorithm to estimate earthquake displacement and demonstrated that VFSA outperforms the GA in this task, Mendes et al. (2024) used a training image to guide the generation of realistic velocity model samples and enhance the convergence, Datta et al. (2019) impliment the VFSA where the sedimentary layers and salt bodies are represented by set of interfaces and ellipses respectively, Mazzotti et al. (2016) proposed GA FWI method involves parametrizing the subsurface with two grids: a coarse grid for inversion and a fine grid for modeling, Tran and Hiltunen (2012) demonstrates the potential of GA for improved characterization subsurface properties, Zeng et al. (2011) studied GA for Rayleigh wave inversion, Aleardi and Mazzotti (2017) proposed the seismic inversion with the GA with markov chain monte carlo (MCMC) method to deal with the uncertainties in the search space, Yang et al. (2017) developed a PSO based method for impedance inversion, Shaw and Srivastava (2007) demonstrates the effectiveness of PSO in inverting geophysical data for natural resource exploration, Ding et al. (2015) focusing on the application of PSO to solve geophysical inverse problems, specifically a 1D-DC resistivity case, Kaplanvural et al. (2020) The research contributes to the literature by demonstrating the ability of PSO to invert common-offset ground penetrating (GPR) traces and estimate dielectric properties, including conductivity and relative magnetic permeability, Fernández-Martínez et al. (2010) used PSO for reservoir characterization, and Fern and Garc (2010) PSO algorithm's application to the SP inverse problem.

An extensively work is also done for finding a better global optimization method. A comparison of the performance of GAs to Monte Carlo is studied which find that GAs can achieve better fits with fewer model parameters and are computationally efficient (Sambridge and Drijkoningen, 1992). A comparison between the GA, and PSO is also performed, conclude that PSO outperform the GA (Ding et al., 2015; Mojica et al., 2019). Sajeve et al. (2017) presents a comparative analysis of four stochastic optimization methods—adaptive simulated annealing (ASA), GA, neighborhood algorithm (NA), and PSO for 1D elastic full-waveform inversion and residual

static computation, this study finds that the choice of method should be guided by the nature of the objective function and the dimensionality of the model space.

It is necessary to use the parametrization to represent the model with limited number of parameters to reduce the complexity as well the computational time. we have implemented a parameterization strategy where a model can be defined with the depth of interface, rate of change of velocity between interface, and velocity of the interface. this reduce the number of parameters to multifold to deal with the curse of dimensionality associated with the number of parameters involved in the inversion.

YOUR METHOD WHY

WHAT NEW and ADVANTAGE

PAPER BRIEF

in this both are used together because both have advantages and disadvantages global is best in exploration and local is best in exploitation. PSO is easily parallelized. Some of the appealing facts of PSO are its convenience, simplicity and easiness of implementation requiring. The prominent features of PSO are its easy implementation, robustness to control parameters and computation efficiency compared with other existing heuristic algorithms such as genetic algorithm in a continuous problem. method

## METHODOLOGY

This approach involves two steps. First, a coarse velocity model is prepared using PSO by optimizing the depth, interface velocity, and the rate of change of velocity between interfaces. This model serves as an initial model for conventional gradient-based FWI in the second step.

### Particle Swarm Optimization

Particle Swarm Optimization (PSO) is a stochastic method developed by James Kennedy and Russell Eberhart in 1995. Inspired by the social behavior of birds flocking to find food, they formulated a mathematical model to simulate this behavior. This model is widely applied to solve various optimization problems. They identified that the fundamental principle guiding birds' food-finding behavior is their ability to communicate with each other. Each bird in the process knows its current position ( $\mathbf{x}_i(t)$ ) and best position ( $\mathbf{p}_i(t)$ ), determined by evaluating the fitness using a cost function. Additionally, each bird shares its best position with others, contributing to the collective knowledge of the flock's best position ( $\mathbf{g}(t)$ ). Each bird's next movement is adjusted by its own best, the flock's best, and its current position. This iterative process continues at each step, ultimately converging towards a globally optimal position through the collaborative effort of all birds. This natural phenomenon is

mathematically described by the velocity update equation 1 and the position update equation 2.

- $\mathbf{x}_i(t)$  be the position of particle  $i$  at iteration  $t$ .
- $\mathbf{v}_i(t)$  be the velocity of particle  $i$  at iteration  $t$ .
- $\mathbf{p}_i(t)$  be the personal best position of particle  $i$  until iteration  $t$ .
- $\mathbf{g}(t)$  be the global best position among all particles until iteration  $t$ .
- $w$  be the inertia weight.
- $c_1$  and  $c_2$  be the cognitive and social acceleration coefficients, respectively.
- $r_1$  and  $r_2$  be random numbers uniformly distributed in the range  $[0, 1]$ .

The velocity and position update rules for each particle are given by:

$$\mathbf{v}_i(t+1) = w\mathbf{v}_i(t) + c_1r_1(\mathbf{p}_i(t) - \mathbf{x}_i(t)) + c_2r_2(\mathbf{g}(t) - \mathbf{x}_i(t)) \quad (1)$$

$$\mathbf{x}_i(t+1) = \mathbf{x}_i(t) + \mathbf{v}_i(t+1) \quad (2)$$

Where:

- $w$  controls the influence of the previous velocity (inertia).
- $c_1$  and  $c_2$  represent the trust of the particle in itself and in the swarm, respectively.
- $r_1$  and  $r_2$  introduce stochasticity to the particle's movement.

## Optimization Parameters

The updates in the Particle Swarm Optimization (PSO) algorithm are influenced by several controlling parameters, including the inertia weight ( $w$ ), acceleration coefficients ( $c_1$  and  $c_2$ ), population size of the swarm, and the number of iterations. Among these, the inertia weight is the most critical tuning parameter as it balances the exploration and exploitation capabilities of PSO by adjusting the contribution of the particle's previous velocity. An inertia weight value between 0.4 and 0.9 is generally found to provide good convergence. The cognitive and social coefficients ( $c_1$  and  $c_2$ ) represent the confidence in a particle's own best position and the swarm's best position, respectively, and they influence the updated velocity of the particles. The number of particles in the swarm also affects convergence; as the number of particles

increases, the search space expands, potentially leading to better convergence. Experimental studies have shown that a swarm size of around 30 particles is generally effective for finding solutions within optimal iterations. The number of iterations, as with all iterative optimization algorithms, significantly impacts the performance of PSO.

This contribution of different parameters for success of PSO make it is necessary to decide the combination of these parameters precisely. we have performed experiments to find the optimal combination of this values, for these experiment we have choose four nonlinear functions Ackley, Griewank, Rastrigin, and Styblinski-Tang function shown in figure ??, ??, ??, and ?? respectively. These experiments are performed to determine the optimal value of the optimization coefficient and examine the relationship between the number of iterations and swarm size. Since both swarm size and iteration count impact computational time, it is essential to balance these factors to achieve effective optimization while minimizing computational costs. To fairly compare the effects of swarm size and the number of iterations, the rate of increase for both parameters is kept consistent. Following this, PSO is applied to the Schwefel function using the parameters chosen from the previous experiment to achieve the parameters that lead to the best convergence. To analyze performance, accuracy is evaluated based on the maximum deviation using equation 3. Further details of these experiments are outlined below.

$$Accuracy(\%) = 100 - \left| \frac{\text{optimal value} - \text{evaluated value}}{\text{optimal value} - \text{maximum deviation}} \right| \times 100 \quad (3)$$

Where:

- *Optimal value*, best possible value of the objective function.
- *Evaluated value*, value of the objective function at a given point in the feasible domain.
- *Maximum deviation*, largest difference between the optimized value and the actual values.

1. Accuracy with Parameters: In this experiment, optimization is conducted for all specified test functions using varying values of  $c_1$ ,  $c_2$ , and inertia weights, as illustrated in figures ??, ??, ??, and ??. To address the inherent randomness of this stochastic method, we perform 50 runs with 1000 iterations and calculate the average of these results as the final optimized values.

This experiment concludes that a combination of inertia weights between 0.5 and 0.8,  $c_1$  values ranging from 0.6 to 2.0, and  $c_2$  values between 0.6 and 1.8 results in improved accuracy.

2. Accuracy with iterations: Here, accuracy is assessed while maintaining a constant swarm size of 30 and an initial iteration count of 1000, which is then

increased by factors of 1.67, 2.0, 2.67, 3.00, 5, and 10, to examine how the number of iterations impacts accuracy across all test functions. The results indicate that as the number of iterations increases, accuracy improves, reaching a maximum close to 100 % when iterations are increased to 10 times, as illustrated in figure ??.

3. Accuracy with swarm size: In this study, accuracy is evaluated across all tests by varying the swarm size, starting with 30 particles and increasing it by factors of 1.67, 2.0, 2.67, 3.00, 5, and 10, while keeping the number of iterations constant at 1000. The findings indicate that as the swarm size increases, accuracy improves to approximately 70 %.

From these experiments for finding the optimization parameters, it is concluded that an optimal combination of inertia weights between 0.5 and 0.8,  $c_1$  values ranging from 0.6 to 2.0, and  $c_2$  values between 0.6 and 1.8 leads to enhanced accuracy. Additionally, increasing the number of iterations relative to the number of particles is beneficial, as it provide improved accuracy while maintaining similar computational costs.

The parameters that performed well in the previous experiments with test functions are used to evaluate the rate of convergence for the Schwefel function, as shown in figure ?. This additional test function focuses solely on the objective function with respect to the number of iterations, as illustrated in figure ?. The aim of this study is to identify a combination of optimization parameters that achieve a better rate of convergence, enabling optimized results to be obtained within fewer iterations. Figure ? illustrates that higher values of inertia do not show convergence, while lower values of inertia exhibit a high rate of convergence but fail to reach the optimized value. An inertia value of 0.6 demonstrates good convergence with different  $c_1$  and  $c_2$  values. This analysis reveals that  $c_1$  at 1.8 and  $c_2$  at both 1.8 and 2.4 converge to zero, albeit slowly. In contrast,  $c_1$  at 2.4 and  $c_2$  ranging from 1.2 to 1.8 exhibit a good rate of convergence, reaching near zero within 100 iterations. Based on this analysis, the optimal parameters for further seismic inversion are set as inertia at 0.6,  $c_1$  at 2.4, and  $c_2$  between 1.2 and 1.8.

## Model Parameterization

The seismic model includes physical parameters defined at densely packed grid points, often in the thousands, leading to an exponentially expanding search space that complicates the implementation of PSO. Therefore, it is essential to create a method for defining these velocity models with fewer parameters before implementing PSO, ensuring that the resulting output model can effectively serve as an initial model for FWI.

We propose a technique to define model with 1D depth-velocity profiles at sparse horizontal positions, as illustrated in Figure ? with white vertical lines. This model is representing a layered marine environment, where the velocity gradually increases with depth, ranging from 1500 to 4700 m/s. Additionally, it features a low-velocity

layer situated between two high-velocity layers. The depth of interface in terms of grid point ( $d_i^k$ ), where  $i$  represents the  $i^{th}$  interface for the  $k^{th}$  depth-velocity profile, ( $g_i^k$ ) denotes the rate of change of velocity between the  $(i-1)^{th}$  and  $i^{th}$  interfaces, and ( $v_i^k$ ) indicates the velocity of the model at the  $i^{th}$  interface. These multiple, sparsely located depth-velocity profiles are interpolated using cubic splines to create an initial model. It is also assumed that no two interfaces intersect, as this is geologically implausible. Furthermore, the search space is restricted to feasible physical parameters. With these constraints, PSO is employed to optimize the three parameters for each layer in the development of the initial model.

## PSO for Preparing Initial Model

The workflow of this implementation is illustrated in Figure ???. It shows that initial model preparation begins with a uniform 1D depth-velocity profile as the initial model, where the velocity is same as upper layer and three parameters—depth, velocity at the interface, and the rate of change of velocity—are used as input parameters initially which are set to zero. A synthetic trace for this model is generated using an  $8^{th}$ -order spatial scheme and a  $2^{nd}$ -order temporal scheme. The synthetic trace is then compared to the observed data using the L2 norm, as described by equation 4. The observed data consists only near-offset data, where the major peaks are likely caused by reflectors directly beneath the shot location. The major peaks are selected from the observed data to guide the inversion process, with a focus on progressively inverting the reflectors defined by grid points. This approach falls into the category of over-parameterization as explained by (Sen Stoffa 1991), where the model is described by microlayers with thickness equal to the grid spacing. The inverted model justifying a particular peak used as an initial model for the next one. This process is repeated until the inversion successfully accounts for all the selected peaks for a shot. We allow flexibility in the timing of the selected peaks since it is not always precise to pinpoint the exact peak. The peaks resulting from multiples will not significantly impact the model because the interfaces causing these multiples have already been accounted. We sparsely select the shot locations and repeat this process for all chosen shots. Using the inverted reflectors from these shots, we create an initial model through interpolation and smoothing. This serves as the initial model for FWI.

$$O(syn^k, obs^k) = \sqrt{\sum_{i=1}^N (syn^k - obs^k)^2} \quad (4)$$

Where  $obs^k$  and  $syn^k$  indicate the observed data and synthetic data generated from the model, respectively;  $k$  refers to the shot number, and  $N$  represents the total samples.

## Full Waveform Inversion

The model prepared using PSO serves as an initial model for FWI. Synthetic data is generated with this model and compared with the observed data, a process known as misfit calculation. Common methods for this calculation include the L2 norm, normalized cross-correlation function, Huber norm, and optimal transport function. The gradient of the objective function with respect to the model parameters is then calculated, which aids in updating the model. This iterative process ultimately leads to the recovery of velocity model.

## THEORY

This is another section.

## Equations

Section headings should be capitalized. Subsection headings should only have the first letter of the first word capitalized.

Here are examples of equations involving vectors and tensors:

$$\mathbf{R} = \begin{pmatrix} R_{XX} & R_{YX} \\ R_{XY} & R_{YY} \end{pmatrix} = \mathbf{P}_{M \rightarrow R} \mathbf{D} \mathbf{P}_{S \rightarrow M} \mathbf{S} \quad , \quad (5)$$

and

$$R_{j,m}(\omega) = \sum_{n=1}^N P_j^{(n)}(\mathbf{x}_R) D^{(n)}(\omega) P_m^{(n)}(\mathbf{x}_S) \quad . \quad (6)$$

6 Note that the macro for the `\tensor` command has been changed to force tensors to be bold uppercase, in compliance with current SEG submission standards. This is so that documents typeset to the old standards will print out according to the new ones: e.g., tensor **T** (note converted to uppercase).

## Figures

Figure 1 shows what it is about.

### *Multiplot*

The first argument of the `multiplot` command specifies the number of plots per row.



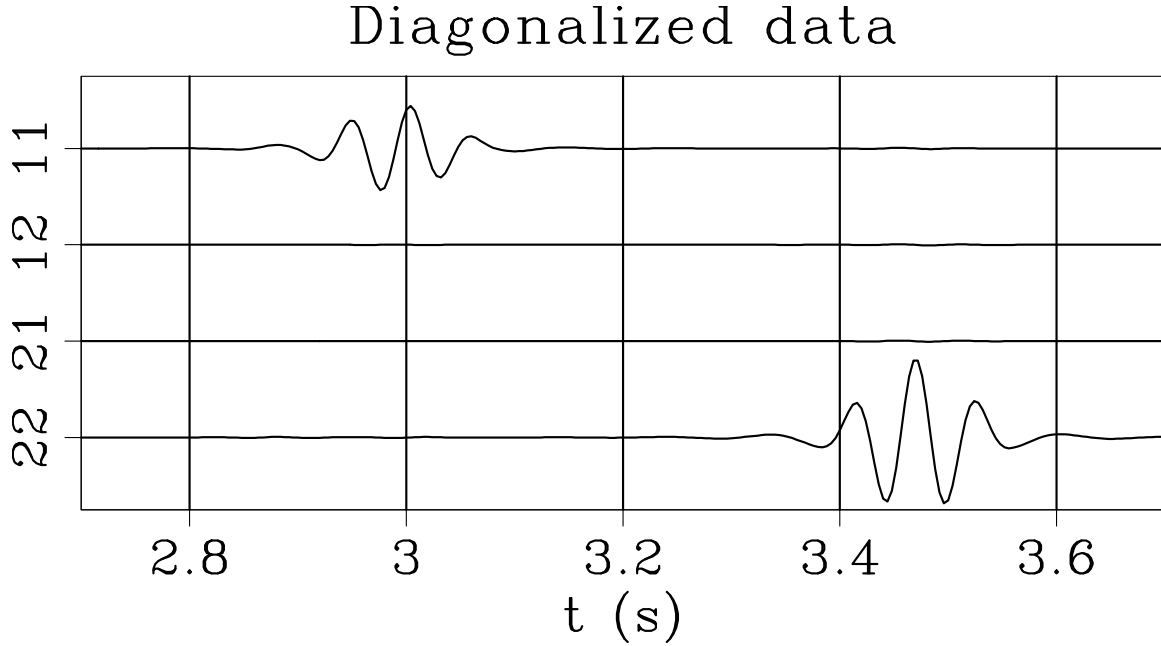


Figure 1: This figure is specified in the document by `\plot{waves}{width=\textwidth}{This caption.}`.

## Tables

## ACKNOWLEDGMENTS

I wish to thank Ivan Pšenčík and Frédéric Billette for having names with non-English letters in them. I wish to thank Červený (2000) for providing an example of how to make a bib file that includes an author whose name begins with a non-English character and Forgues (1996) for providing both an example of referencing a Ph.D. thesis and yet more non-English characters.

## APPENDIX A

### APPENDIX EXAMPLE

According to the new SEG standard, appendices come before references.

$$\frac{\partial U}{\partial z} = \left\{ \sqrt{\frac{1}{v^2} - \left[ \frac{\partial t}{\partial g} \right]^2} + \sqrt{\frac{1}{v^2} - \left[ \frac{\partial t}{\partial s} \right]^2} \right\} \frac{\partial U}{\partial t} \quad (\text{A-1})$$

It is important to get equation A-1 right. See also Appendix B.

## APPENDIX B


### ANOTHER APPENDIX

$$\frac{\partial U}{\partial z} = \left\{ \sqrt{\frac{1}{v^2} - \left[ \frac{\partial t}{\partial g} \right]^2} + \sqrt{\frac{1}{v^2} - \left[ \frac{\partial t}{\partial s} \right]^2} \right\} \frac{\partial U}{\partial t} \quad (\text{B-1})$$

Too lazy to type a different equation but note the numeration.

The error comparison is provided in Figure B-1.

Figure B-1: This figure is specified in the document by `\sideplot{errgrp}{width=0.8\textwidth}{This caption.}`.

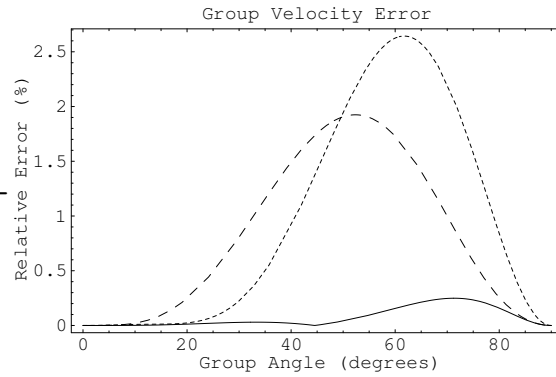

## APPENDIX C

### THE SOURCE OF THIS DOCUMENT

```
%\documentclass[paper]{geophysics}
\documentclass[paper, revised]{geophysics}
\usepackage{cleveref} %for cref

% An example of defining macros
\newcommand{\rs}[1]{\mathstrut\mbox{\scriptsize\rm #1}}
\newcommand{\rr}[1]{\mbox{\rm #1}}
\usepackage{natbib}
\bibliographystyle{plainnat}
\begin{document}

\title{An example \emph{Geophysics} article, \\ with a two-line title}

\renewcommand{\thefootnote}{\fnsymbol{footnote}}

\ms{GEO-Example} % paper number
```

```

\address{
\footnotemark[1]BP UTG, \
200 Westlake Park Blvd, \
Houston, TX, 77079 \
\footnotemark[2]Bureau of Economic Geology, \
John A. and Katherine G. Jackson School of Geosciences \
The University of Texas at Austin \
University Station, Box X \
Austin, TX 78713-8924}
\author{Joe Dellinger\footnotemark[1] and Sergey Fomel\footnotemark[2]}

\footer{Example}
\lefthead{Dellinger \& Fomel}
\righthead{\emph{Geophysics} example}

\maketitle

\begin{abstract}
  This is an example of using \textsf{geophysics.cls} for writing
  \emph{Geophysics} papers.
\end{abstract}

\section{Introduction}

FWI is most efficient seismic inversion method \citep{Pratt1999, Schuster2017, Tarantola2005}
\par
FWI is a nonlinear optimization problem \citep{Cruse1990, Geng2018, Guo2021}, having
\par
Since the formalisation of the FWI it have been gone through a long journey of development
\par
An extensively work is also done for finding a better global optimization method. A comparison
\par
It is necessary to use the parametrization to represent the model with limited number of parameters
\par
YOUR METHOD WHY
\par
WHAT NEW and ADVANTAGE
\par
PAPER BRIEF

```

in this both are used together because both have advantages and disadvantages global optimization. Some of the appealing facts of PSO are its convenience, simplicity and easiness of implementation. The prominent features of PSO are its easy implementation, robustness to control parameters.

method \ref{method}  
\section{Methodology}  
\label{method}

This approach involves two steps. First, a coarse velocity model is prepared using PS

\subsection{Particle Swarm Optimization}

Particle Swarm Optimization (PSO) is a stochastic method developed by James Kennedy and

\begin{itemize}

\item \(\mathbf{x}\_i(t)\) be the position of particle \((i)\) at iteration \((t)\).

\item \(\mathbf{v}\_i(t)\) be the velocity of particle \((i)\) at iteration \((t)\).

\item \(\mathbf{p}\_i(t)\) be the personal best position of particle \((i)\) until iteration \((t)\).

\item \(\mathbf{g}(t)\) be the global best position among all particles until iteration \((t)\).

\item \((w)\) be the inertia weight.

\item \((c\_1)\) and \((c\_2)\) be the cognitive and social acceleration coefficients,

\item \((r\_1)\) and \((r\_2)\) be random numbers uniformly distributed in the range \([0, 1]\).

\end{itemize}

The velocity and position update rules for each particle are given by:

\begin{equation}

$$\mathbf{v}_i(t+1) = w \mathbf{v}_i(t) + c_1 r_1 (\mathbf{p}_i(t) - \mathbf{x}_i(t)) + c_2 r_2 (\mathbf{g}(t) - \mathbf{x}_i(t))$$

\label{eqn:pso\_1}

\end{equation}

\begin{equation}

$$\mathbf{x}_i(t+1) = \mathbf{x}_i(t) + \mathbf{v}_i(t+1)$$

\label{eqn:pso\_2}

\end{equation}

Where:

\begin{itemize}

\item \((w)\) controls the influence of the previous velocity (inertia).

\item \((c\_1)\) and \((c\_2)\) represent the trust of the particle in itself and in the swarm.

\item \((r\_1)\) and \((r\_2)\) introduce stochasticity to the particle's movement.

\end{itemize}

\subsection{Optimization Parameters}

The updates in the Particle Swarm Optimization (PSO) algorithm are influenced by several parameters.

\\

This contribution of different parameters for success of PSO makes it necessary to define an accuracy metric.

\begin{equation}

$$\text{Accuracy (\%)} = 100 - \left| \frac{\text{optimal value} - \text{evaluated value}}{\text{optimal value}} \right| \times 100$$

\label{eqn:accuracy}

\end{equation}

Where:

\begin{itemize}

\item \((\text{Optimal value})\), best possible value of the objective function.

```

\item \{(Evaluated \ value\), value of the objective function at a given point in the
\item \{(Maximum \ deviation\), largest difference between the optimized value and the
\end{itemize}
\begin{enumerate}
\item Accuracy with Parameters: In this experiment, optimization is conducted for all
%\begin{figure}
% \includegraphics[width=\paperwidth]{Fig/ackley.png}
% \caption{Ackley function.}
% \label{fig:ackley}
%\end{figure}
%\begin{figure}
% \includegraphics[width=\paperwidth]{Fig/griewank.png}
% \caption{Griewank function.}
% \label{fig:griewank}
%\end{figure}
%\begin{figure}
% \includegraphics[width=\paperwidth]{Fig/rastrigin.png}
% \caption{Rastrigin function.}
% \label{fig:rastrigin}
%\end{figure}
%\begin{figure}
% \includegraphics[width=\paperwidth]{Fig/styblinski.png}
% \caption{Styblinski-Tang function.}
% \label{fig:styblinski}
%\end{figure}

```

This experiment concludes that a combination of inertia weights between 0.5 and 0.8,

```

% \begin{sidewaysfigure}
% \includegraphics[width=\paperwidth]{Fig/ackley_para_vs_accuracy.jpeg}
% \caption{Optimization of the Ackley function with varying inertia weights, \{(c_1\),
% \label{fig:acc_ackley}
% \end{sidewaysfigure}
% \begin{sidewaysfigure}
% \includegraphics[width=\paperwidth]{Fig/griewank_para_vs_accuracy.jpeg}
% \caption{Optimization of the Griewank function with varying inertia weights, \{(c_1\),
% \label{fig:acc_griewank}
% \end{sidewaysfigure}
% \begin{sidewaysfigure}
% \includegraphics[width=\paperwidth]{Fig/rastrigin_para_vs_accuracy.jpeg}
% \caption{Optimization of the Rastrigin function with varying inertia weights, \{(c_1\),
% \label{fig:acc_rastrigin}
% \end{sidewaysfigure}
% \begin{sidewaysfigure}
% \includegraphics[width=\paperwidth]{Fig/styblinski_para_vs_accuracy.jpeg}
% \caption{Optimization of the Styblinski-Tang function with varying inertia weights,

```

```

% \label{fig:acc_styblinski}
% \end{sidewaysfigure}

\item Accuracy with iterations: Here, accuracy is assessed while maintaining a constant
% \begin{figure}
% \includegraphics[width=0.8\paperwidth]{Fig/iteration_vs_accuracy.jpeg}
% \caption{Accuracy variation with iterations keeping the swarm size at 30 for all tests}
% \label{fig:acc_itr}
% \end{figure}

\item Accuracy with swarm size: In this study, accuracy is evaluated across all tests
\end{enumerate}
From these experiments for finding the optimization parameters, it is concluded that
\\
The parameters that performed well in the previous experiments with test functions are
%\begin{figure}
% \includegraphics[width=0.8\paperwidth]{Fig/schwefel.png}
% \caption{Schwefel function.}
% \label{fig:schwefel}
%\end{figure}

%\begin{figure}
% \includegraphics[width=0.8\paperwidth]{Fig/con_vs_itr.jpg}
% \caption{Objective function versus iteration for Schwefel function.}
% \label{fig:con_schwefel}
%\end{figure}

\subsection{Model Parameterization}
The seismic model includes physical parameters defined at densely packed grid points,
\\
We propose a technique to define model with 1D depth-velocity profiles at sparse horizons

%\begin{figure}
% \includegraphics[width=0.8\paperwidth]{Fig/parameterization.jpg}
% \caption{layered model.}
% \label{fig:parameterization}
%\end{figure}

\subsection{PSO for Preparing Initial Model}
The workflow of this implementation is illustrated in Figure \ref{fig:work_flow}. It
We sparsely select the shot locations and repeat this process for all chosen shots.

%\begin{figure}
% \includegraphics[width=0.5\paperwidth]{Fig/flow_chart.png}
% \caption{Work-flow.}

```

```
% \label{fig:work_flow}
%\end{figure}
```

```
\begin{equation}
0(\text{syn}^k, \text{obs}^k) = \sqrt{\sum_{i=1}^N \left( \text{syn}^k - \text{obs}^k \right)^2}
\label{eqn:l2norm}
\end{equation}
```

Where  $(\text{obs}^k)$  and  $(\text{syn}^k)$  indicate the observed data and synthetic data generated

```
\subsection{Full Waveform Inversion}
The model prepared using PSO serves as an initial model for FWI. Synthetic data is ge
\section*{Theory}
```

This is another section.

```
\subsection{Equations}
```

Section headings should be capitalized. Subsection headings should only have the first letter of the first word capitalized.

Here are examples of equations involving vectors and tensors:

```
\begin{equation}
\text{tensor}\{R\} =
\pmatrix{R_{\rs{XX}} & R_{\rs{YX}} \\ R_{\rs{XY}} & R_{\rs{YY}}}
=
\text{tensor}\{P\}_{M\rightarrow R} \ ; \ \text{tensor}\{D\} \ ; \ \text{tensor}\{P\}_{S\rightarrow M}
\ ; \ ; \ ; \ \text{tensor}\{S\} \ \ \ \ ,
\label{SVD}
\end{equation}
```

and

```
\begin{equation}
R_{\{j,m\}}(\omega) =
\sum_{n=1}^N \ \ , \ \ ,
P_{\{j\}}^{\{n\}}(\mathbf{x}_R) \ \ , \ \ ,
D^{\{n\}}(\omega) \ \ , \ \ ,
P_{\{m\}}^{\{n\}}(\mathbf{x}_S) \ \ \ \ .
\label{SVDray}
\end{equation}
\ref{SVDray}
```

Note that the macro for the `\verb#\tensor#` command has been changed to force tensors to be bold uppercase, in compliance with current SEG submission standards. This is so that documents typeset to the old standards will print out according to the new ones: e.g., `\tensor{t}` (note converted to uppercase).

```
\subsection*{Figures}
\renewcommand{\figdir}{Fig} % figure directory
```

Figure~\ref{fig:waves} shows what it is about.

```
\plot{waves}{width=\textwidth}
{This figure is specified in the document by \texttt{
    $\backslash$plot\{waves\}\{width=$\backslash$textwidth\}\{This caption.\}}.
}
```

```
\subsubsection{Multiplot}
```

The first argument of the `\texttt{multiplot}` command specifies the number of plots per row.

```
\subsection{Tables}
```

```
\begin{acknowledgments}
I wish to thank Ivan P\v{s}en\v{c}\i{k} and Fr\'ed\'eric Billette
for having names with non-English letters in them. I wish to thank
\cite{Cervený} for providing an example of how to make a bib file that
includes an author whose name begins with a non-English character and
\cite{forgues96} for providing both an example of referencing a Ph.D.
thesis and yet more non-English characters.
\end{acknowledgments}
```

```
\append{Appendix example}
\label{example}
```

According to the new SEG standard, appendices come before references.

```
\begin{equation}
\frac{\partial U}{\partial z} =
\left\{
\sqrt{\frac{1}{v^2} - \left[\frac{\partial t}{\partial g}\right]^2} +
\sqrt{\frac{1}{v^2} - \left[\frac{\partial t}{\partial s}\right]^2}
\right\}
\frac{\partial U}{\partial t}
\label{eqn:partial}
\end{equation}
```

It is important to get equation~\ref{eqn:partial} right. See also Appendix~\ref{equations}.



```
\append[equations]{Another appendix}

\begin{equation}
\frac{\partial U}{\partial z} =
\left\{
\sqrt{\frac{1}{v^2} - \left[\frac{\partial t}{\partial g}\right]^2} +
\sqrt{\frac{1}{v^2} - \left[\frac{\partial t}{\partial s}\right]^2}
\right\}
\frac{\partial U}{\partial t}
\label{eqn:partial2}
\end{equation}
Too lazy to type a different equation but note the numeration.
```

The error comparison is provided in Figure~\ref{fig:errgrp}.

```
\sideplot{errgrp}{width=0.8\textwidth}
{This figure is specified in the document by \texttt{
  $\backslash$sideplot\{errgrp\}\{width=0.8$\backslash$text\-width\}\{This caption.
}
```

```
\append{The source of this document}
```

```
\verbatiminput{geophysics_paper.tex}
```

```
\append{The source of the bibliography}
```

```
\verbatiminput{geophysics_reference.bib}
```

```
\newpage
```

```
\bibliographystyle{seg} % style file is seg.bst
```

```
\bibliography{geophysics_reference}
```

```
\end{document}
```

## APPENDIX D

### THE SOURCE OF THE BIBLIOGRAPHY

```
@Book{lamport,
  author = {L[eslie] Lamport},
  title = {\LaTeX: A Document Preparation System},
  publisher = {Addison-Wesley},
```

```

    year =    1994
}

@Book{kopka,
  author = {H[elmut] Kopka and P[atrick] W[] Daly},
  title = {Guide to {\LaTeX}},
  publisher = {Addison-Wesley},
  year =    2004
}

@preamble{"\newcommand{\SortNoop}[1]{\}" }
@Book{Cervený,
  author = {V[] {\SortNoop{Cervený}}\v{C}erven\'{y}},
  title = {Seismic Ray Method},
  year = {2000},
  publisher = {Cambridge University Press}
}

@PHDTHESIS{forgues96,
  author = {E. Forgues},
  title = {Inversion linearis\'ee multi-param\'etres via la th\'eorie des rais},
  school = {Institut Fran\c{c}ais du P\'etrole - University Paris VII},
  year = {1996}
}

@article{Datta2016,
  abstract = {Full-waveform inversion (FWI) has become a popular method to estimate elastic properties of the Earth's subsurface.},
  author = {Datta, Debanjan and Sen, Mrinal K.},
  doi = {10.1190/GEO2015-0339.1},
  file = {:C:\Users\VIKAS\AppData\Local\Mendeley Ltd.\Mendeley Desktop\Downloaded\Datta2016.pdf},
  issn = {19422156},
  journal = {Geophysics},
  mendeley-groups = {global_optimization},
  number = {4},
  pages = {R211--R223},
  title = {{Estimating a starting model for full-waveform inversion using a global optimization approach}},
  volume = {81},
  year = {2016}
}

@article{Fu2021,
  author = {Fu, Xin and Innanen, Kristopher A and Project, Crewes},
  file = {:C:\Users\VIKAS\AppData\Local\Mendeley Ltd.\Mendeley Desktop\Downloaded\Fu2021.pdf},

```

```

mendeley-groups = {global_optimization},
pages = {1--3},
title = {{A new parallel simulated annealing algorithm for 1 . 5D acoustic full-wavef
year = {2021}
}

```

```

@article{Shiba2005,
abstract = {A source inversion method using very fast simulated annealing is proposed
author = {Shiba, Yoshiaki and Irikura, Kojiro},
doi = {10.1186/BF03351837},
file = {:C:/Users/VIKAS/AppData/Local/Mendeley Ltd./Mendeley Desktop/Downloaded/Shib
issn = {18805981},
journal = {Earth, Planets and Space},
keywords = {Waveform inversion,characterized source model,effective stress,empirical
mendeley-groups = {global_optimization},
number = {7},
pages = {571--590},
title = {{Rupture process by waveform inversion using simulated annealing and simulat
volume = {57}},
year = {2005}
}

```

```

@article{Mendes2024,
abstract = {the large number of simulations needed to adjust the simulation parameter
author = {Mendes, Rafael and Kaelin, Bruno and Mart{'i}nez-Sansigre, Alejo and Bar
doi = {10.1190/GEO2023-0140.1},
file = {:C:/Users/VIKAS/AppData/Local/Mendeley Ltd./Mendeley Desktop/Downloaded/Mend
issn = {19422156},
journal = {Geophysics},
mendeley-groups = {global_optimization},
number = {3},
pages = {R187--R198},
title = {{Faster determination of an initial velocity model for full-waveform inversi
volume = {89}},
year = {2024}
}

```

```

@article{Datta2019,
abstract = {A good starting model is imperative in full-waveform inversion (FWI) beca
author = {Datta, Debanjan and Sen, Mrinal K. and Liu, Faqi and Morton, Scott},
doi = {10.1190/geo2018-0175.1},
file = {:C:/Users/VIKAS/AppData/Local/Mendeley Ltd./Mendeley Desktop/Downloaded/Datt
issn = {19422156},
journal = {Geophysics},

```

```

keywords = {2D,acoustic,full-waveform inversion,optimization,salt},
mendeley-groups = {global_optimization},
number = {5},
pages = {R793--R804},
title = {{Full-waveform inversion of salt models using shape optimization and simulation}},
volume = {84},
year = {2019}
}

```

```

@article{Mazzotti2016,
abstract = {Full-waveform inversion (FWI) tries to estimate velocity models of the subsurface},
author = {Mazzotti, Alfredo and Bienati, Nicola and Stucchi, Eusebio and Tognarelli, Roberto},
doi = {10.1190/tle35121068.1},
file = {:D:\Vikas/research_papers/global_optimization/tle35121068.1.pdf:pdf},
issn = {19383789},
journal = {Leading Edge},
mendeley-groups = {global_optimization},
number = {12},
pages = {1068--1075},
title = {{Two-grid genetic algorithm full-waveform inversion}},
volume = {35},
year = {2016}
}

```

```

@article{ktran2012,
abstract = {A technique is presented to invert full waveforms using a genetic algorithm},
author = {Tran, Khiem T. and Hiltunen, Dennis R.},
doi = {10.2113/jeege17.4.197},
file = {:D:\Vikas/research_papers/global_optimization/tran-hiltunen-2012-one-dimensional_inversion_of_full_waveforms_using_a_genetic_algorithm.pdf:pdf},
issn = {1083-1363},
journal = {Journal of Environmental and Engineering Geophysics},
mendeley-groups = {global_optimization},
number = {4},
pages = {197--213},
title = {{One-Dimensional Inversion of Full Waveforms using a Genetic Algorithm}},
volume = {17},
year = {2012}
}

```

```

@article{Zeng2011,
abstract = {Conventional surface wave inversion for shallow shear (S)-wave velocity models},
author = {Zeng, Chong and Xia, Jianghai and Miller, Richard D. and Tsoflias, Georgios},
doi = {10.1016/j.jappgeo.2011.09.028},
file = {:D:\Vikas/research_papers/global_optimization/1-s2.0-S0926985111002308-main.pdf:pdf},
issn = {09269851},

```

```

journal = {Journal of Applied Geophysics},
keywords = {Finite difference,Genetic algorithm,Lateral heterogeneity,Rayleigh waves,
mendeley-groups = {global_optimization},
number = {4},
pages = {648--655},
title = {{Feasibility of waveform inversion of Rayleigh waves for shallow shear-wave
volume = {75},
year = {2011}
}

```

```

@article{Aleardi,
author = {Aleardi, Mattia and Mazzotti, Alfredo},
title = {1D elastic full-waveform inversion and uncertainty estimation by means of a
journal = {Geophysical Prospecting},
volume = {65},
number = {1},
pages = {64-85},
keywords = {Full-waveform inversion, Elastic, Stochastic},
doi = {https://doi.org/10.1111/1365-2478.12397},
url = {https://onlinelibrary.wiley.com/doi/abs/10.1111/1365-2478.12397},
eprint = {https://onlinelibrary.wiley.com/doi/pdf/10.1111/1365-2478.12397},
abstract = {ABSTRACT Stochastic optimization methods, such as genetic algorithms, sea
year = {2017}
}

```

```

@article{Yang2017,
abstract = {In order to improve the fine structure inversion ability of igneous rocks
author = {Yang, Haijun and Xu, Yongzhong and Peng, Gengxin and Yu, Guiping and Chen,
doi = {10.1016/j.ijmst.2017.01.019},
file = {:D:\Vikas/research_papers/global_optimization/1-s2.0-S2095268617300654-main.
issn = {20952686},
journal = {International Journal of Mining Science and Technology},
keywords = {Igneous rocks,Model-based inversion,Particle swarm optimization,Probabili
mendeley-groups = {global_optimization},
number = {2},
pages = {349--357},
publisher = {China University of Mining & Technology},
title = {{Particle swarm optimization and its application to seismic inversion of ign
url = {http://dx.doi.org/10.1016/j.ijmst.2017.01.019},
volume = {27},
year = {2017}
}

```

```

@article{Shaw2007,
abstract = {Particle swarm optimization (PSO) is a global optimization strategy that

```

```

author = {Shaw, Ranjit and Srivastava, Shalivahan},
doi = {10.1190/1.2432481},
file = {:D\:/Vikas/research_papers/global optimization/shaw-srivastava-2007-particle-
issn = {00168033},
journal = {Geophysics},
keywords = {Genetic algorithms,Geomagnetism,Geophysical techniques,Terrestrial electr
mendeley-groups = {global_optimization},
number = {2},
title = {{Particle swarm optimization: A new tool to invert geophysical data}},
volume = {72},
year = {2007}
}

```

```

@article{Ding2015,
abstract = {Inversion is a critical and challenging task in geophysical research. Geo
author = {Ding, Ke and Chen, Yanyang and Wang, Yanbin and Tan, Ying},
doi = {10.1109/CEC.2015.7257030},
file = {:D\:/Vikas/research_papers/global optimization/Regional_seismic_waveform_inve
isbn = {9781479974924},
journal = {2015 IEEE Congress on Evolutionary Computation, CEC 2015 - Proceedings},
mendeley-groups = {global_optimization},
pages = {1235--1241},
publisher = {IEEE},
title = {{Regional seismic waveform inversion using swarm intelligence algorithms}},
year = {2015}
}

```

```

@article{Kaplanvural2020,
abstract = {This study investigates the identification of buried materials from ground
author = {Kaplanvural, Ismail and Pekşen, Ertan and {\{}zkap, Kerem},
doi = {10.1016/j.jappgeo.2020.104157},
file = {:D\:/Vikas/research_papers/global optimization/1-s2.0-S0926985120305401-main.
issn = {09269851},
journal = {Journal of Applied Geophysics},
keywords = {Ground-penetrating Radar,Inversion,Non-destructive Evaluation,Particle Sw
mendeley-groups = {global_optimization},
title = {{1D waveform inversion of GPR trace by particle swarm optimization}},
volume = {181},
year = {2020}
}

```

```

@article{Fernandez-Martinez2010,
abstract = {We apply different particle swarm optimizers (PSO) to a history matching
author = {Fern{\{}andez-Mart{\{}nez, Juan Luis and Mukerji, Tapan and Garc{\{}i
doi = {10.1190/1.3513319},

```

```

file = {:D\:/Vikas/research_papers/global optimization/fern\{'a'}ndez-mart\{'i'}nez
isbn = {9781617389801},
journal = {Society of Exploration Geophysicists International Exposition and 80th Ann
mendeley-groups = {global_optimization},
number = {1},
pages = {2334--2339},
title = {{Reservoir characterization and inversion uncertainty via a family of partic
volume = {77}},
year = {2010}
}

```

```

@article{Fern2010,
abstract = {Waterflow in the subsoil generates electrical currents mea- surable at the
author = {Fern, Juan Luis and Garc, Esperanza},
file = {:D\:/Vikas/research_papers/global optimization/fern\{'a'}ndez-mart\{'i'}nez
journal = {Geophysics},
mendeley-groups = {global_optimization},
number = {4},
title = {{Appraising the Streaming-Potential Inverse Problem}},
volume = {75},
year = {2010}
}

```

```

@article{Sajeva2017,
abstract = {We compare the performances of four stochastic optimisation methods using
author = {Sajeva, Angelo and Aleardi, Mattia and Galuzzi, Bruno and Stucchi, Eusebio
doi = {10.1111/1365-2478.12532},
file = {:home/vikas/Desktop/papers/Geophysical Prospecting - 2017 - Sajeva - Comparin
issn = {13652478},
journal = {Geophysical Prospecting},
keywords = {Optimisation,Stochastic},
mendeley-groups = {global{\_}optimization},
number = {Special Issue 1},
pages = {322--346},
title = {{Comparing the performances of four stochastic optimisation methods using an
volume = {65}},
year = {2017}
}

```

```

@article{Sajeva2017,
abstract = {We compare the performances of four stochastic optimisation methods using
author = {Sajeva, Angelo and Aleardi, Mattia and Galuzzi, Bruno and Stucchi, Eusebio
doi = {10.1111/1365-2478.12532},
file = {:home/vikas/Desktop/papers/Geophysical Prospecting - 2017 - Sajeva - Comparin
issn = {13652478},

```





```

pages = {1--4},
title = {{Building starting models for full-waveform inversion using global optimization}},
year = {2019}
}

```

```

@article{Sajeve2017,
abstract = {We compare the performances of four stochastic optimisation methods using an ensemble-based approach},
author = {Sajeve, Angelo and Aleardi, Mattia and Galuzzi, Bruno and Stucchi, Eusebio},
doi = {10.1111/1365-2478.12532},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Sajeve2017.pdf},
issn = {13652478},
journal = {Geophysical Prospecting},
keywords = {Optimisation, Stochastic},
mendeley-groups = {global{\_}optimization},
number = {Special Issue 1},
pages = {322--346},
title = {{Comparing the performances of four stochastic optimisation methods using an ensemble-based approach}},
volume = {65},
year = {2017}
}

```

```

@article{Aleardi2017,
abstract = {Stochastic optimization methods, such as genetic algorithms, search for the optimal model parameters by means of a stochastic search},
author = {Aleardi, Mattia and Mazzotti, Alfredo},
doi = {10.1111/1365-2478.12397},
file = {:home/vikas/Desktop/papers/Geophysical Prospecting - 2016 - Aleardi - 1D elastic full-waveform inversion and uncertainty estimation by means of a stochastic search},
issn = {13652478},
journal = {Geophysical Prospecting},
keywords = {Elastic, Full-waveform inversion, Stochastic},
mendeley-groups = {global{\_}optimization},
number = {1},
pages = {64--85},
title = {{1D elastic full-waveform inversion and uncertainty estimation by means of a stochastic search}},
volume = {65},
year = {2017}
}

```

```

@article{Tarantola1986,
abstract = {Three parameters are needed to describe a perfectly elastic, isotropic Earth model},
author = {Tarantola, Albert},
doi = {10.1190/1.1893017},
file = {:home/vikas/Downloads/tarantola-2012-a-strategy-for-nonlinear-elastic-inversion},
journal = {1986 SEG Annual Meeting, SEG 1986},
number = {10},
pages = {527--530},

```

```

title = {{A strategy for nonlinear elastic inversion of seismic reflection data}},
volume = {51},
year = {1986}
}

```

```

@article{Schuster2017,
abstract = {Fundamentals -- Deconvolution -- Velocity analysis, statics corrections,
author = {Schuster, Gerard T.},
doi = {10.1190/1.9781560803423},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Schus
journal = {Seismic Inversion},
mendeley-groups = {books,FWI},
title = {{Seismic Inversion}},
year = {2017}
}

```

```

@article{Virieux2009a,
abstract = {Full-waveform inversion (FWI) is a challenging data-fitting procedure bas
author = {Virieux, J. and Operto, S.},
doi = {10.1190/1.3238367},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Virie
issn = {00168033},
journal = {Geophysics},
mendeley-groups = {books/finite difference,numerical{\_}modelling},
number = {6},
title = {{An overview of full-waveform inversion in exploration geophysics}},
volume = {74},
year = {2009}
}

```

```

@article{Liu2017,
abstract = {In fullwaveforminversion (FWI) with the least-squares (L2) norm, the dire
author = {Liu, Youshan and Teng, Jiwen and Xu, Tao and Wang, Yanghua and Liu, Qinya a
doi = {10.1093/gji/ggw485},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Liu e
issn = {1365246X},
journal = {Geophysical Journal International},
keywords = {Inverse theory,Seismology,Waveform inversion},
number = {1},
pages = {106--122},
title = {{Robust time-domain full waveform inversion with normalized zero-lag cross-c
volume = {209},
year = {2017}
}

```

```
@article{Metivier2018,
abstract = {Optimal transport distance has been recently promoted as a tool to measure
author = {M{\'}{e}tivier, Ludovic and Allain, Aude and Brossier, Romain and M{\'}{e}rlet,
doi = {10.1190/geo2017-0807.1},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/M{\'}{e}tivier, Ludovic and Allain, Aude and Brossier, Romain and M{\'}{e}rlet,
issn = {19422156},
journal = {Geophysics},
keywords = {Full-waveform inversion,Imaging,Inversion,Signal processing,Wave propagation},
mendeley-groups = {DAAD},
number = {5},
pages = {R515--R540},
title = {{Optimal transport for mitigating cycle skipping in full-waveform inversion:
volume = {83},
year = {2018}
}
```

```
@article{Gomez2017,
author = {G{\'}{o}mez, Leonardo and Pestana*, Reynam C.},
doi = {10.1190/sbgf2017-058},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/G{\'}{o}mez, Leonardo and Pestana*, Reynam C.},
number = {1},
pages = {296--301},
title = {{Full-waveform inversion using alternative objective functions in the presence of
year = {2017}
}
```

```
@article{Pratt1999,
author = {Pratt, R Gerhard and Shipp, Richard M},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Pratt, R Gerhard and Shipp, Richard M},
number = {3},
pages = {902--914},
title = {{Seismic waveform inversion in the frequency domain , Part 2 : Fault delineation
volume = {64},
year = {1999}
}
```

```
@article{Plessix2006,
abstract = {Estimating the model parameters from measured data generally consists of
author = {Plessix, Rene Edouard},
doi = {10.1111/j.1365-246X.2006.02978.x},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Plessix, Rene Edouard},
issn = {0956540X},
journal = {Geophysical Journal International},
```

```

keywords = {Adjoint state,Gradient,Migration,Tomography},
mendeley-groups = {FWI},
number = {2},
pages = {495--503},
title = {{A review of the adjoint-state method for computing the gradient of a functi
volume = {167}},
year = {2006}
}

```

```

@article{Guo2021,
abstract = {Seismic full waveform inversion (FWI) is a powerful method for estimating
author = {Guo, Peng and Singh, Satish C. and Vaddineni, Venkata A. and Visser, Gerhard
doi = {10.1093/gji/ggaa505},
file = {:home/vikas/Desktop/papers/ggaa505.pdf:pdf},
issn = {1365246X},
journal = {Geophysical Journal International},
keywords = {Body waves,Crustal imaging,Probability distributions,Waveform inversion},
number = {2},
pages = {1056--1078},
publisher = {Oxford University Press},
title = {{Nonlinear full waveform inversion of wide-aperture OBS data for Moho struct
volume = {224}},
year = {2021}
}

```

```

@article{Geng2018,
abstract = {Full-waveform inversion (FWI) is a highly non-linear inverse problem, non
author = {Geng, Yu and Pan, Wenyong and Innanen, Kristopher A.},
doi = {10.1093/gji/ggy002},
file = {:home/vikas/Desktop/papers/ggy002.pdf:pdf},
issn = {1365246X},
journal = {Geophysical Journal International},
keywords = {Inverse theory,Theoretical seismology,Wave scattering and diffraction,Wav
number = {2},
pages = {739--756},
title = {{Frequency-domain full-waveform inversion with non-linear descent directions
volume = {213}},
year = {2018}
}

```

```

@article{Crase1990,
abstract = {Nonlinear elastic waveform inversion has advanced to the point where it i
author = {Crase, E. and Pica, A. and Noble, M. and McDonald, J. and Tarantola, A.},
doi = {10.1190/1.1442864},
file = {:home/vikas/Downloads/1990-noble-geophysics-1.pdf:pdf},

```

```

issn = {00168033},
journal = {Geophysics},
number = {5},
pages = {527--538},
title = {{Robust elastic nonlinear waveform inversion: application to real data}},
volume = {55},
year = {1990}
}

```

```

@book{FitchnerETH2015,
abstract = {Inferring interior properties of the Sun from photospheric measurements o
author = {Fitchner(ETH)},
booktitle = {SpringerBriefs in Mathematics},
doi = {https://doi.org/10.1007/978-3-642-15807-0},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Fitch
isbn = {9783642158063},
issn = {21918201},
keywords = {Adjoint Method,Meridional Circulation,Solar Interior,Sound Speed,Travel T
pages = {75--103},
title = {{Full waveform inversion}},
year = {2015}
}

```

```

@article{Bunks1995a,
abstract = {Iterative inversion methods have been unsuccessful at inverting seismic d
author = {Bunks, C. and Saleck, F. M. and Zaleski, S. and Chavent, G.},
doi = {10.1190/1.1443880},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Bunks
issn = {00168033},
journal = {Geophysics},
number = {5},
pages = {1457--1473},
title = {{Multiscale seismic waveform inversion}},
volume = {60},
year = {1995}
}

```

```

@article{Schafer2014,
abstract = {},
author = {Sch{"a"}fer, M. and Groos, L. and Forbriger, T. and Bohlen, T.},
doi = {10.1093/gji/ggu171},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Sch{\
isbn = {1365246X},
journal = {Geophysical Journal International},
keywords = {Seismic tomography,Surface waves and free oscillations,Wave propagation},

```

```
number = {3},
pages = {1405--1418},
title = {{Line-source simulation for shallow-seismic data. Part 2: Full-waveform inversion}},
volume = {198},
year = {2014}
}
```

```
@article{Sirgue2004,
abstract = {Prestack migration and/or inversion may be implemented in either the time
author = {Sirgue, Laurent and Pratt, R. Gerhard},
doi = {10.1190/1.1649391},
file = {:home/vikas/Downloads/sirgue-pratt-2004-efficient-waveform-inversion-and-imaging},
issn = {00168033},
journal = {Geophysics},
number = {1},
pages = {231--248},
title = {{Efficient waveform inversion and imaging: A strategy for selecting temporal
volume = {69},
year = {2004}
}
```

```
@article{TenKroode2013,
abstract = {We considered the importance of low frequencies in seismic reflection data},
author = {ten Kroode, Fons and Bergler, Steffen and Corsten, Cees and de Maag, Jan Willem},
doi = {10.1190/GEO2012-0294.1},
file = {:home/vikas/Desktop/papers/ten-kroode-et-al-2013-broadband-seismic-data-the-importance-of-low-frequencies},
issn = {19422156},
journal = {Geophysics},
number = {2},
pages = {WA3--WA14},
title = {{Broadband seismic data-The importance of low frequencies}},
volume = {78},
year = {2013}
}
```

```
@article{Ravaut2004,
abstract = {An application of full-waveform tomography to dense onshore wide-aperture
author = {Ravaut, C. and Operto, S. and Imbrota, L. and Virieux, J. and Herrero, A. a
doi = {10.1111/j.1365-246X.2004.02442.x},
file = {:home/vikas/Desktop/papers/159-3-1032.pdf:pdf},
issn = {0956540X},
journal = {Geophysical Journal International},
keywords = {Finite-difference methods,Thrust belt,Traveltime and full waveform invers
number = {3},
pages = {1032--1056},
```

```

title = {{Multiscale imaging of complex structures from multifold wide-aperture seismic data}},
volume = {159},
year = {2004}
}

```

```

@article{Liu2017,
abstract = {In full-waveform inversion (FWI) with the least-squares (L2) norm, the direct minimization of the misfit function is ill-posed. In this paper, we propose a robust time-domain full waveform inversion with normalized zero-lag cross-correlation. The proposed method can handle non-linear and non-stationary noise. The results show that the proposed method can produce more accurate and stable inversion results than the conventional method.},
author = {Liu, Youshan and Teng, Jiwen and Xu, Tao and Wang, Yanghua and Liu, Qinya and Teng, Jiwen},
doi = {10.1093/gji/ggw485},
file = {:home/vikas/Desktop/papers/ggw485.pdf:pdf},
issn = {1365246X},
journal = {Geophysical Journal International},
keywords = {Inverse theory, Seismology, Waveform inversion},
number = {1},
pages = {106--122},
title = {{Robust time-domain full waveform inversion with normalized zero-lag cross-correlation}},
volume = {209},
year = {2017}
}

```

```

@article{Chi2015,
abstract = {Because modeling for full-waveform inversion (FWI) cannot produce reflectivity images, we propose a correlation-based reflection full-waveform inversion (CRFWI) method. The proposed method can handle non-linear and non-stationary noise. The results show that the proposed method can produce more accurate and stable inversion results than the conventional method.},
author = {Chi, Benxin and Dong, Lianguo and Liu, Yuzhu},
doi = {10.1190/GEO2014-0345.1},
file = {:home/vikas/Desktop/papers/chi-et-al-2015-correlation-based-reflection-full-waveform-inversion.pdf:pdf},
issn = {19422156},
journal = {Geophysics},
number = {4},
pages = {R189--R202},
title = {{Correlation-based reflection full-waveform inversion}},
volume = {80},
year = {2015}
}

```

```

@article{Metivier2018,
abstract = {Optimal transport distance has been recently promoted as a tool to measure the similarity between two probability distributions. In this paper, we propose a method to measure the similarity between two probability distributions using the optimal transport distance. The proposed method can handle non-linear and non-stationary noise. The results show that the proposed method can produce more accurate and stable inversion results than the conventional method.},
author = {Metivier, Ludovic and Allain, Aude and Brossier, Romain and Metivier, Ludovic},
doi = {10.1190/geo2017-0807.1},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Metivier et al. 2018.pdf:pdf},
issn = {19422156},
journal = {Geophysics},
keywords = {Full-waveform inversion, Imaging, Inversion, Signal processing, Wave propagation},
mendeley-groups = {DAAD},
number = {5},
pages = {R515--R540},

```

```

title = {{Optimal transport for mitigating cycle skipping in full-waveform inversion:
volume = {83},
year = {2018}
}

```

```

@article{Brossier2016,
author = {Brossier, R and Oudet, E and Virieux, J},
doi = {10.1093/gji/ggw014},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Brossier2016.pdf},
keywords = {1 i n t,computational seismology,controlled source seis-,full waveform inversion},
mendeley-groups = {DAAD},
pages = {345--377},
title = {{Measuring the misfit between seismograms using an optimal transport distance}},
year = {2016}
}

```

```

@article{Metivier2016,
abstract = {The use of optimal transport distance has recently yielded significant progress in seismic tomography},
author = {M{\'}{e}tivier, L. and Brossier, R. and M{\'}{e}rigot, Q. and Oudet, E. and Virieux, J.},
doi = {10.1088/0266-5611/32/11/115008},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/M{\'}{e}tivier2016.pdf},
issn = {13616420},
journal = {Inverse Problems},
keywords = {full waveform inversion,non-smooth convex optimization,optimal transport,seismic tomography},
mendeley-groups = {DAAD},
number = {11},
publisher = {IOP Publishing},
title = {{An optimal transport approach for seismic tomography: Application to 3D full waveform inversion}},
volume = {32},
year = {2016}
}

```

```

@article{Chi2014,
abstract = {Full waveform inversion (FWI) has been a successful tool to build high resolution seismic tomography},
author = {Chi, Benxin and Dong, Lianguo and Liu, Yuzhu},
doi = {10.1016/j.jappgeo.2014.07.010},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Chi2014.pdf},
issn = {09269851},
journal = {Journal of Applied Geophysics},
keywords = {Adjoint-state method,Envelope,Full waveform inversion,Nonlinearity,Objective function},
mendeley-groups = {FWI},
pages = {36--46},
publisher = {Elsevier B.V.},
title = {{Full waveform inversion method using envelope objective function without local minima}},
url = {http://dx.doi.org/10.1016/j.jappgeo.2014.07.010},

```



```

volume = {109},
year = {2014}
}

```

```

@article{Borisov2018,
abstract = {Full-waveform inversion (FWI) is a powerful method for estimating the ear
author = {Borisov, Dmitry and Modrak, Ryan and Gao, Fuchun and Tromp, Jeroen},
doi = {10.1190/GEO2017-0081.1},
file = {:home/vikas/.local/share/data/Mendeley Ltd./Mendeley Desktop/Downloaded/Boris
issn = {19422156},
journal = {Geophysics},
mendeley-groups = {DAAD},
number = {1},
pages = {R1--R11},
title = {{3D elastic full-waveform inversion of surface waves in the presence of irre
volume = {83},
year = {2018}
}

```

```

@article{Arora1995,
abstract = {A review of the methods for global optimization re- veals that most metho
author = {Arora, J S and Elwakeil, O.A. and Chahande, A.I. and Hsieh, C.C.},
file = {:home/vikas/Desktop/papers/BF01743964.pdf:pdf},
journal = {Structural Optimization 9,},
mendeley-groups = {global{\_}optimization},
pages = {137--159},
title = {{Review Paper Global optimization m e t h o d s for engineering applications
volume = {9},
year = {1995}
}

```

```

@book{Torn1989,
author = {T{"o}rn, Aimo and {\v{Z}}ilinskas, Antanas},
booktitle = {Lecture Notes in Computer Science},
file = {:home/vikas/Desktop/papers/3-540-50871-6-3.pdf:pdf},
isbn = {3540508716},
pages = {1--24},
title = {{Lecture Notes in Computer Science: Global Optimization}},
url = {https://link.springer.com/10.1007/3-540-50871-6{\_}1},
volume = {245},
year = {1989}
}

```

```

@article{Locatelli2021,
abstract = {Recent developments in (Global) Optimization are surveyed in this paper.

```

```
author = {Locatelli, Marco and Schoen, Fabio},
doi = {10.1016/j.ejco.2021.100012},
file = {:home/vikas/Desktop/papers/1-s2.0-S2192440621001398-main.pdf:pdf},
issn = {21924414},
journal = {EURO Journal on Computational Optimization},
keywords = {Exact methods,Global optimization,Heuristics},
mendeley-groups = {global{\_}optimization},
number = {October 2020},
pages = {100012},
publisher = {Elsevier Ltd},
title = {{{(Global) Optimization: Historical notes and recent developments}}},
url = {https://doi.org/10.1016/j.ejco.2021.100012},
volume = {9},
year = {2021}
}
```

## REFERENCES

- Mattia Aleardi and Alfredo Mazzotti. 1D elastic full-waveform inversion and uncertainty estimation by means of a hybrid genetic algorithm–Gibbs sampler approach. *Geophysical Prospecting*, 65(1):64–85, 2017. ISSN 13652478. doi: 10.1111/1365-2478.12397.
- J S Arora, O.A. Elwakeil, A.I. Chahande, and C.C. Hsieh. Review Paper Global optimization methods for engineering applications : a review. *Structural Optimization* 9,, 9:137–159, 1995.
- Dmitry Borisov, Ryan Modrak, Fuchun Gao, and Jeroen Tromp. 3D elastic full-waveform inversion of surface waves in the presence of irregular topography using an envelope-based misfit function. *Geophysics*, 83(1):R1–R11, 2018. ISSN 19422156. doi: 10.1190/GEO2017-0081.1.
- R Brossier, E Oudet, and J Virieux. Measuring the misfit between seismograms using an optimal transport distance : application to full waveform inversion. pages 345–377, 2016. doi: 10.1093/gji/ggw014.
- C. Bunks, F. M. Saleck, S. Zaleski, and G. Chavent. Multiscale seismic waveform inversion. *Geophysics*, 60(5):1457–1473, 1995. ISSN 00168033. doi: 10.1190/1.1443880.
- V[ ] Červený. *Seismic Ray Method*. Cambridge University Press, 2000.
- Benxin Chi, Liangguo Dong, and Yuzhu Liu. Full waveform inversion method using envelope objective function without low frequency data. *Journal of Applied Geophysics*, 109:36–46, 2014. ISSN 09269851. doi: 10.1016/j.jappgeo.2014.07.010. URL <http://dx.doi.org/10.1016/j.jappgeo.2014.07.010>.
- Benxin Chi, Liangguo Dong, and Yuzhu Liu. Correlation-based reflection full-waveform inversion. *Geophysics*, 80(4):R189–R202, 2015. ISSN 19422156. doi: 10.1190/GEO2014-0345.1.
- E. Crase, A. Pica, M. Noble, J. McDonald, and A. Tarantola. Robust elastic nonlinear waveform inversion: application to real data. *Geophysics*, 55(5):527–538, 1990. ISSN 00168033. doi: 10.1190/1.1442864.
- Debanjan Datta and Mrinal K. Sen. Estimating a starting model for full-waveform inversion using a global optimization method. *Geophysics*, 81(4):R211–R223, 2016. ISSN 19422156. doi: 10.1190/GEO2015-0339.1.
- Debanjan Datta, Mrinal K. Sen, Faqi Liu, and Scott Morton. Full-waveform inversion of salt models using shape optimization and simulated annealing. *Geophysics*, 84(5):R793–R804, 2019. ISSN 19422156. doi: 10.1190/geo2018-0175.1.

- Ke Ding, Yanyang Chen, Yanbin Wang, and Ying Tan. Regional seismic waveform inversion using swarm intelligence algorithms. *2015 IEEE Congress on Evolutionary Computation, CEC 2015 - Proceedings*, pages 1235–1241, 2015. doi: 10.1109/CEC.2015.7257030.
- Juan Luis Fern and Esperanza Garc. Appraising the Streaming-Potential Inverse Problem. *Geophysics*, 75(4), 2010.
- Juan Luis Fernández-Martínez, Tapan Mukerji, Esperanza García-Gonzalo, and Amit Suman. Reservoir characterization and inversion uncertainty via a family of particle swarm optimizers. *Society of Exploration Geophysicists International Exposition and 80th Annual Meeting 2010, SEG 2010*, 77(1):2334–2339, 2010. doi: 10.1190/1.3513319.
- Fitchner(ETH). *Full waveform inversion*. 2015. ISBN 9783642158063. doi: <https://doi.org/10.1007/978-3-642-15807-0>.
- E. Forgues. *Inversion linéarisée multi-paramètres via la théorie des rais*. PhD thesis, Institut Français du Pétrole - University Paris VII, 1996.
- Xin Fu, Kristopher A Innanen, and Crewes Project. A new parallel simulated annealing algorithm for 1 . 5D acoustic full-waveform inversion. pages 1–3, 2021.
- Yu Geng, Wenyong Pan, and Kristopher A. Innanen. Frequency-domain full-waveform inversion with non-linear descent directions. *Geophysical Journal International*, 213(2):739–756, 2018. ISSN 1365246X. doi: 10.1093/gji/ggy002.
- Leonardo Gómez and Reynam C. Pestana\*. Full-waveform inversion using alternative objective functions in the presence of noise and uncertainties of source signature. (1):296–301, 2017. doi: 10.1190/sbgf2017-058.
- Peng Guo, Satish C. Singh, Venkata A. Vaddineni, Gerhard Visser, Ingo Grevemeyer, and Erdinc Saygin. Nonlinear full waveform inversion of wide-aperture OBS data for Moho structure using a trans-dimensional Bayesian method. *Geophysical Journal International*, 224(2):1056–1078, 2021. ISSN 1365246X. doi: 10.1093/gji/ggaa505.
- Ismail Kaplanvural, Ertan Pekşen, and Kerem Özkap. 1D waveform inversion of GPR trace by particle swarm optimization. *Journal of Applied Geophysics*, 181, 2020. ISSN 09269851. doi: 10.1016/j.jappgeo.2020.104157.
- Youshan Liu, Jiwen Teng, Tao Xu, Yanghua Wang, Qinya Liu, and José Badal. Robust time-domain full waveform inversion with normalized zero-lag cross-correlation objective function. *Geophysical Journal International*, 209(1):106–122, 2017. ISSN 1365246X. doi: 10.1093/gji/ggw485.
- Marco Locatelli and Fabio Schoen. (Global) Optimization: Historical notes and recent developments. *EURO Journal on Computational Optimization*, 9(October 2020):100012, 2021. ISSN 21924414. doi: 10.1016/j.ejco.2021.100012. URL <https://doi.org/10.1016/j.ejco.2021.100012>.

- Alfredo Mazzotti, Nicola Bienati, Eusebio Stucchi, Andrea Tognarelli, Mattia Aleardi, and Angelo Sajeve. Two-grid genetic algorithm full-waveform inversion. *Leading Edge*, 35(12):1068–1075, 2016. ISSN 19383789. doi: 10.1190/tle35121068.1.
- Rafael Mendes, Bruno Kaelin, Alejo Martínez-Sansigre, Barbosa, Cristiana Bentes, and Amorim. Faster determination of an initial velocity model for full-waveform inversion based on simulated annealing. *Geophysics*, 89(3):R187–R198, 2024. ISSN 19422156. doi: 10.1190/GEO2023-0140.1.
- L. Métivier, R. Brossier, Q. Mérigot, E. Oudet, and J. Virieux. An optimal transport approach for seismic tomography: Application to 3D full waveform inversion. *Inverse Problems*, 32(11), 2016. ISSN 13616420. doi: 10.1088/0266-5611/32/11/115008.
- Ludovic Métivier, Aude Allain, Romain Brossier, Quentin Mérigot, Edouard Oudet, and Jean Virieux. Optimal transport for mitigating cycle skipping in full-waveform inversion: A graph-space transform approach. *Geophysics*, 83(5):R515–R540, 2018. ISSN 19422156. doi: 10.1190/geo2017-0807.1.
- Oscar Mojica, Peterson Nogueira, Rodrigo Santana, and Daniel Relevo. Building starting models for full-waveform inversion using global optimization methods - A comparison between Particle swarm optimization and genetic algorithm. pages 1–4, 2019. doi: 10.22564/16cisbgf2019.078.
- Rene Edouard Plessix. A review of the adjoint-state method for computing the gradient of a functional with geophysical applications. *Geophysical Journal International*, 167(2):495–503, 2006. ISSN 0956540X. doi: 10.1111/j.1365-246X.2006.02978.x.
- R Gerhard Pratt and Richard M Shipp. Seismic waveform inversion in the frequency domain , Part 2 : Fault delineation in sediments using crosshole data. 64(3):902–914, 1999.
- C. Ravaut, S. Operto, L. Improta, J. Virieux, A. Herrero, and P. Dell’Aversana. Multiscale imaging of complex structures from multifold wide-aperture seismic data by frequency-domain full-waveform tomography: Application to a thrust belt. *Geophysical Journal International*, 159(3):1032–1056, 2004. ISSN 0956540X. doi: 10.1111/j.1365-246X.2004.02442.x.
- Angelo Sajeve, Mattia Aleardi, Bruno Galuzzi, Eusebio Stucchi, Emmanuel Spadavecchia, and Alfredo Mazzotti. Comparing the performances of four stochastic optimisation methods using analytic objective functions, 1D elastic full-waveform inversion, and residual static computation. *Geophysical Prospecting*, 65(Special Issue 1):322–346, 2017. ISSN 13652478. doi: 10.1111/1365-2478.12532.
- Malcolm Sambridge and Guy Drijkoningen. Genetic algorithms in seismic waveform inversion. *Geophysical Journal International*, 109(2):323–342, 1992. ISSN 1365246X. doi: 10.1111/j.1365-246X.1992.tb00100.x.

- M. Schäfer, L. Groos, T. Forbriger, and T. Bohlen. Line-source simulation for shallow-seismic data. Part 2: Full-waveform inversion-a synthetic 2-D case study. *Geophysical Journal International*, 198(3):1405–1418, 2014. ISSN 1365246X. doi: 10.1093/gji/ggu171.
- Gerard T. Schuster. Seismic Inversion. *Seismic Inversion*, 2017. doi: 10.1190/1.9781560803423.
- Ranjit Shaw and Shalivahan Srivastava. Particle swarm optimization: A new tool to invert geophysical data. *Geophysics*, 72(2), 2007. ISSN 00168033. doi: 10.1190/1.2432481.
- Yoshiaki Shiba and Kojiro Irikura. Rupture process by waveform inversion using simulated annealing and simulation of broadband ground motions. *Earth, Planets and Space*, 57(7):571–590, 2005. ISSN 18805981. doi: 10.1186/BF03351837.
- Laurent Sirgue and R. Gerhard Pratt. Efficient waveform inversion and imaging: A strategy for selecting temporal frequencies. *Geophysics*, 69(1):231–248, 2004. ISSN 00168033. doi: 10.1190/1.1649391.
- Albert Tarantola. A strategy for nonlinear elastic inversion of seismic reflection data. *1986 SEG Annual Meeting, SEG 1986*, 51(10):527–530, 1986. doi: 10.1190/1.1893017.
- Fons ten Kroode, Steffen Bergler, Cees Corsten, Jan Willem de Maag, Floris Strijbos, and Henk Tijhof. Broadband seismic data-The importance of low frequencies. *Geophysics*, 78(2):WA3–WA14, 2013. ISSN 19422156. doi: 10.1190/GEO2012-0294.1.
- Aimo Törn and Antanas Žilinskas. *Lecture Notes in Computer Science: Global Optimization*, volume 245. 1989. ISBN 3540508716. URL [https://link.springer.com/10.1007/3-540-50871-6\\_1](https://link.springer.com/10.1007/3-540-50871-6_1).
- Khiem T. Tran and Dennis R. Hiltunen. One-Dimensional Inversion of Full Waveforms using a Genetic Algorithm. *Journal of Environmental and Engineering Geophysics*, 17(4):197–213, 2012. ISSN 1083-1363. doi: 10.2113/jeege17.4.197.
- J. Virieux and S. Operto. An overview of full-waveform inversion in exploration geophysics. *Geophysics*, 74(6), 2009. ISSN 00168033. doi: 10.1190/1.3238367.
- Haijun Yang, Yongzhong Xu, Gengxin Peng, Guiping Yu, Meng Chen, Wensheng Duan, Yongfeng Zhu, Yongfu Cui, and Xingjun Wang. Particle swarm optimization and its application to seismic inversion of igneous rocks. *International Journal of Mining Science and Technology*, 27(2):349–357, 2017. ISSN 20952686. doi: 10.1016/j.ijmst.2017.01.019. URL <http://dx.doi.org/10.1016/j.ijmst.2017.01.019>.

Chong Zeng, Jianghai Xia, Richard D. Miller, and Georgios P. Tsoflias. Feasibility of waveform inversion of Rayleigh waves for shallow shear-wave velocity using a genetic algorithm. *Journal of Applied Geophysics*, 75(4):648–655, 2011. ISSN 09269851. doi: 10.1016/j.jappgeo.2011.09.028.