


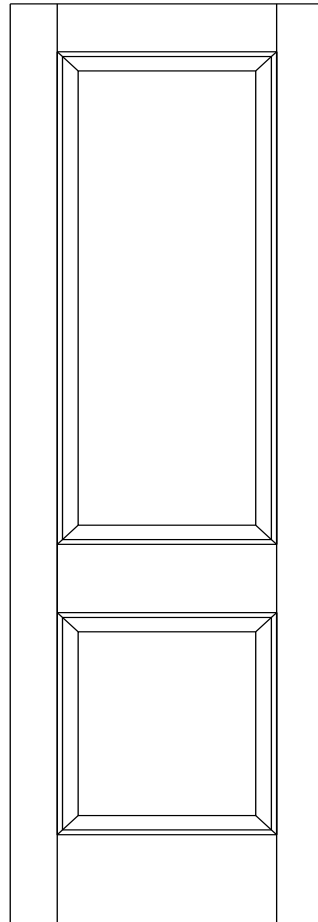


# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## EA3082 and IA82 SCOOP RAISED PANEL SQUARE TOP



Note: All Stile  
and Rail  
Width  
Dimensions  
are face  
widths

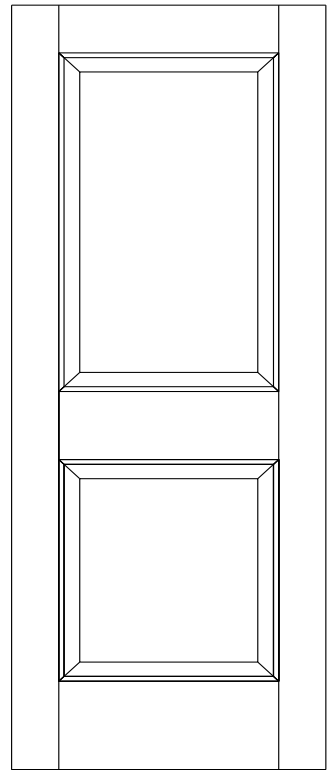


### SIZE SPECIFICATIONS


Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
96"	8/0	1 3/4	1/6 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
<= 18"	4"
20" - 40"	4 1/2"
>= 42"	5"

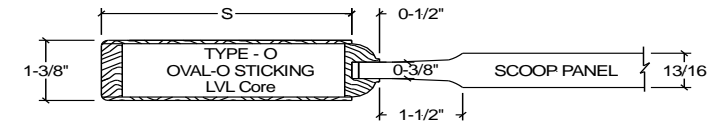

1 3/8" Cross Section - 13/16" Panel

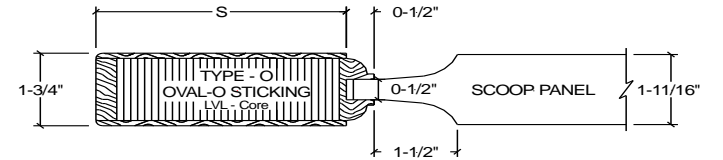

1 3/4" Cross Section - 1 11/16" Panel

### DOOR TYPE and MANUFACTURING SPECIFICATIONS



SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel
TOP	Square Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued

Last Update: 02/28/21





# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## EA3083 and IA83 SCOOP RAISED PANEL ARCH TOP

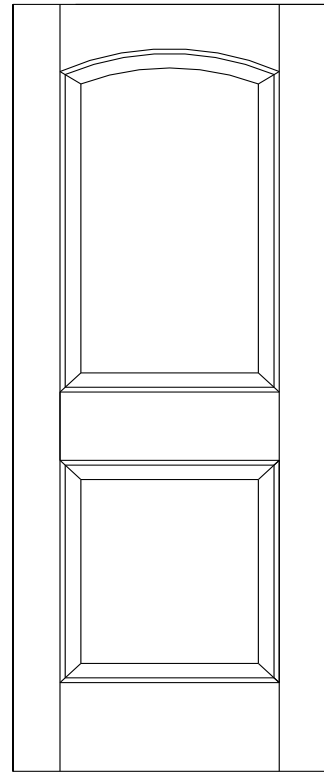

Note: All Stile  
and Rail  
Width  
Dimensions  
are face  
widths

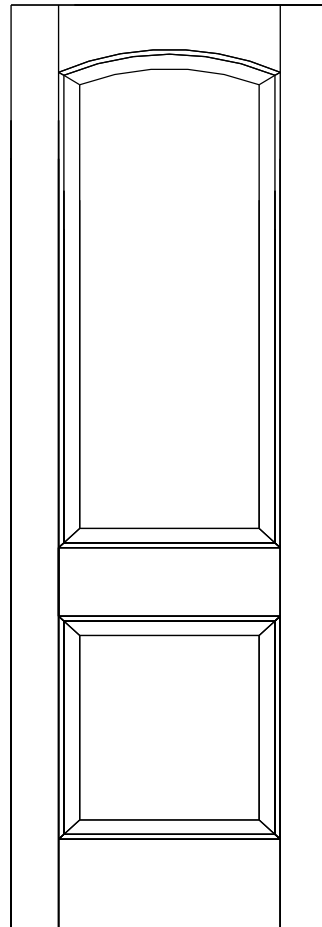

### SIZE SPECIFICATIONS


Standard Door	
Heights	
80"	6/8
96"	8/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0


Standard Door	
Thickness	Width
1 3/8	1/6 - 3/0
1 3/4	1/6 - 4/0

Door Width	Stile Face Width
W	S
<= 18"	4"
20" - 40"	4 1/2"
>= 42"	5"

Door Width	Arch Drop
W	AD
18"-20"	1 7/8"
21"-23"	2 1/8"
>= 24"	2 3/8"

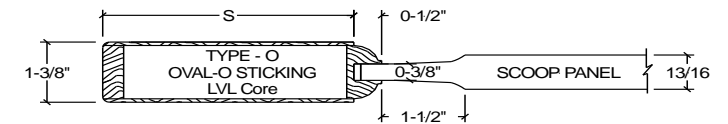

1 3/8" Cross Section - 13/16" Panel

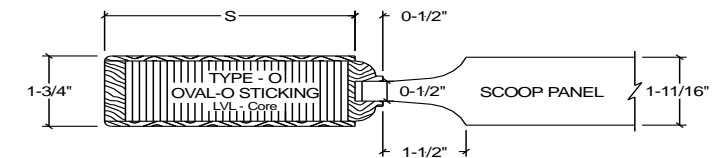

1 3/4" Cross Section - 1 11/16" Panel

### DOOR TYPE and MANUFACTURING SPECIFICATIONS


SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel
TOP	Arch Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued

Last Updated: 02/28/21








# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

EA3082V and IA82V SCOOP  
RAISED PANEL SQUARE TOP : V-  
GROOVE



Note: All Stile  
and Rail  
Width  
Dimensions  
are face  
widths

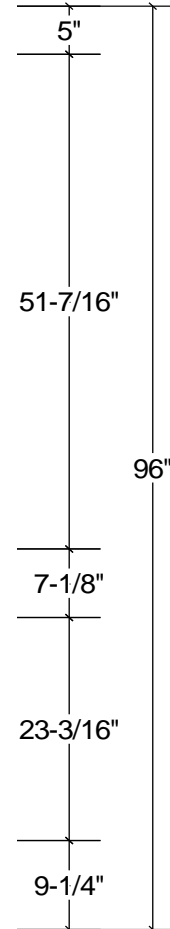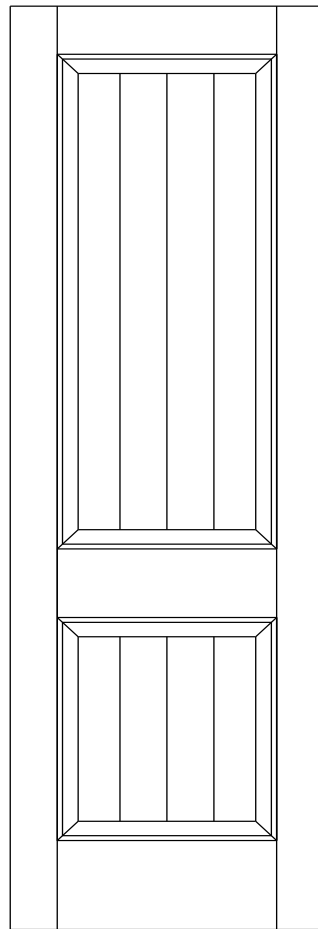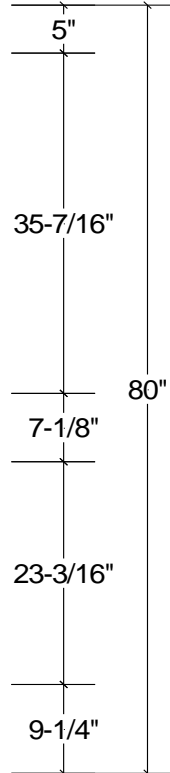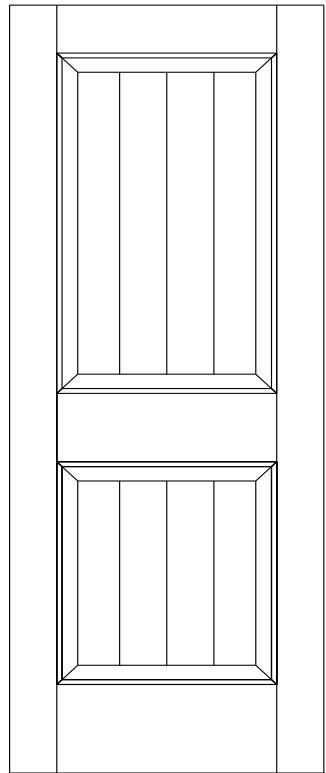


## SIZE SPECIFICATIONS


Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
96"	8/0	1 3/4	1/6 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
<= 18"	4"
20" - 40"	4 1/2"
>= 42"	5"

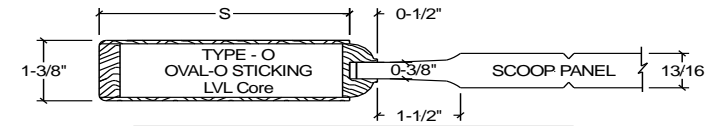

1 3/8" Cross Section - 13/16" Panel

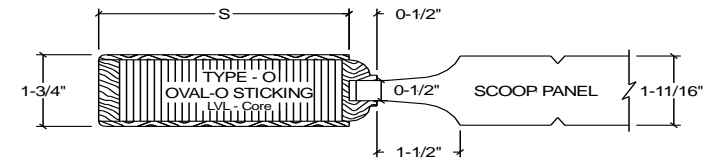

1 3/4" Cross Section - 1 11/16" Panel

## V-Grooves:

- 3/16" Wide x 1/8" Deep Grooves
- 4 1/2" between grooves.
- Outside staves may be less than 4 1/2"
- Grooves are NOT on glue lines.

## DOOR TYPE and MANUFACTURING SPECIFICATIONS



SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel : V-Groove
TOP	Square Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued

Last Updated: 02/28/21





# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

EA3083V and IA83V SCOOP  
RAISED PANEL ARCH TOP : V-  
GROOVE

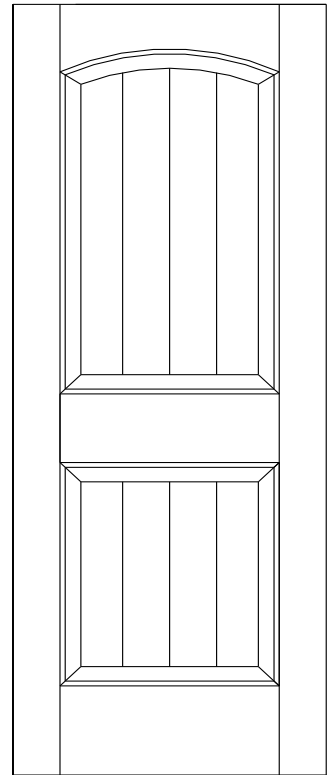

Note: All Stile  
and Rail  
Width  
Dimensions  
are face  
widths

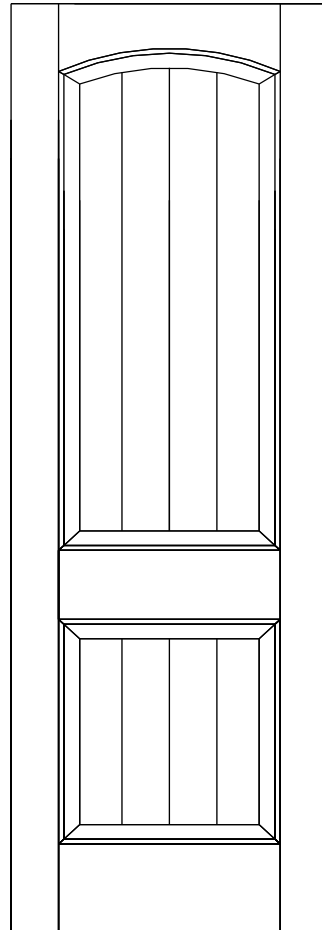

## SIZE SPECIFICATIONS


Standard Door	
Heights	
80"	6/8
96"	8/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0


Standard Door	
Thickness	Width
1 3/8	1/6 - 3/0
1 3/4	1/6 - 4/0

Door	Stile Face
Width	Width
W	S
<= 18"	4"
20" - 40"	4 1/2"
>= 42"	5"

Door	Arch
Width	Drop
W	AD
18"-20"	1 7/8"
21"-23"	2 1/8"
>= 24"	2 3/8"



1 3/8" Cross Section - 13/16" Panel

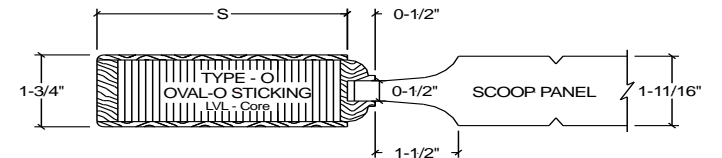

1 3/4" Cross Section - 1 11/16" Panel

## V-Grooves:

- 3/16" Wide x 1/8" Deep Grooves
- 4 1/2" between grooves.
- Outside staves may be less than 4 1/2"
- Grooves are NOT on glue lines

## DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel : V-Groove
TOP	Arch Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued


Last Updated: 02/28/21






# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## EA9082 SCOOP RAISED PANEL SQUARE TOP 20 MINUTE FIRE RATED

20MIN Door shown separately as size ordered for stock doors



Note: All Stile  
and Rail  
Width  
Dimensions  
are face  
widths

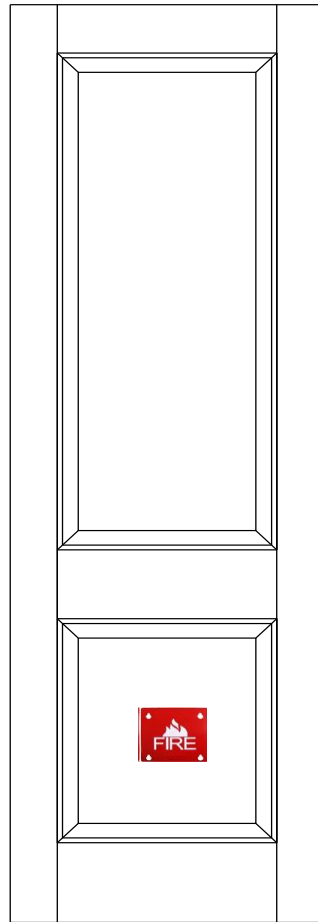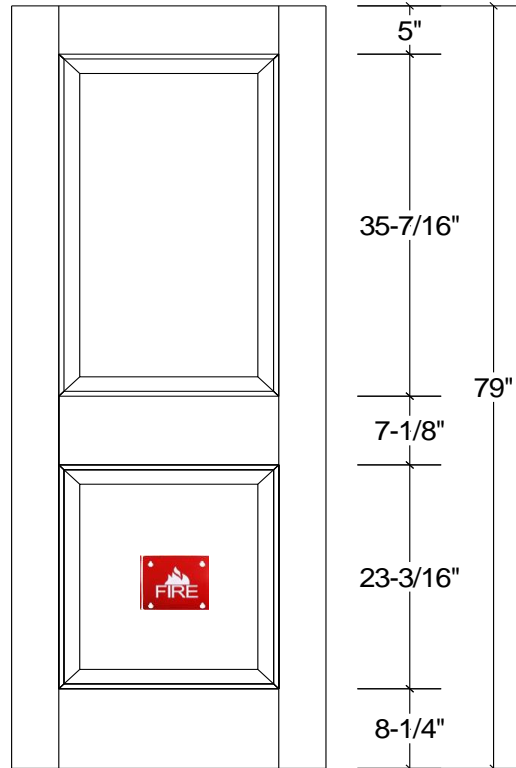


### SIZE SPECIFICATIONS

Standard Door	
Heights	
79"	6/7
95"	7/11

Standard Door	
Thickness	Width
Only Available in 1 3/4	
1 3/4	2/0 - 4/0

Can be Special Ordered for any size Width 2/0-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
20" - 40"	4 1/2"
>= 42"	5"

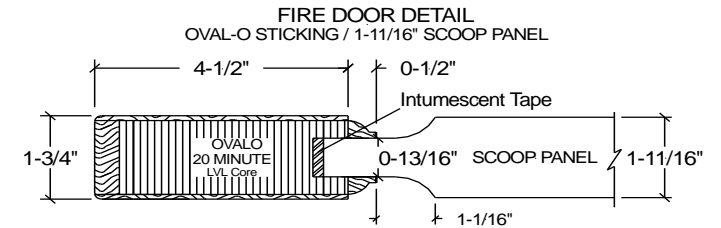

1 3/4" Cross Section - 1 11/16" Panel  
20 Minute Fire Rated

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel
TOP	Square Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued, Intumescent Tape



Last Updated: 02/28/21





# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## EA9083 SCOOP RAISED PANEL ARCH TOP 20 MINUTE FIRE RATED

20MIN Door shown separately as size ordered for stock doors

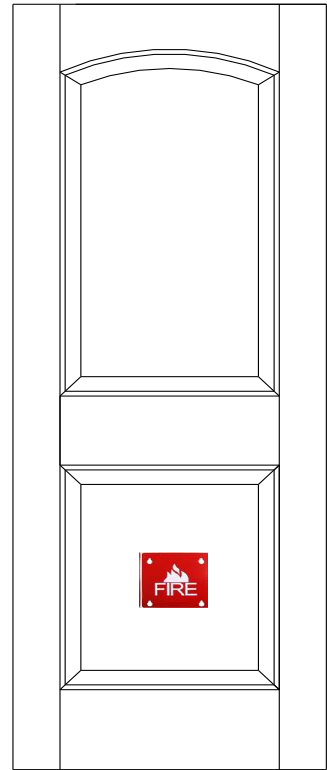

Note: All Stile and Rail Width Dimensions are face widths

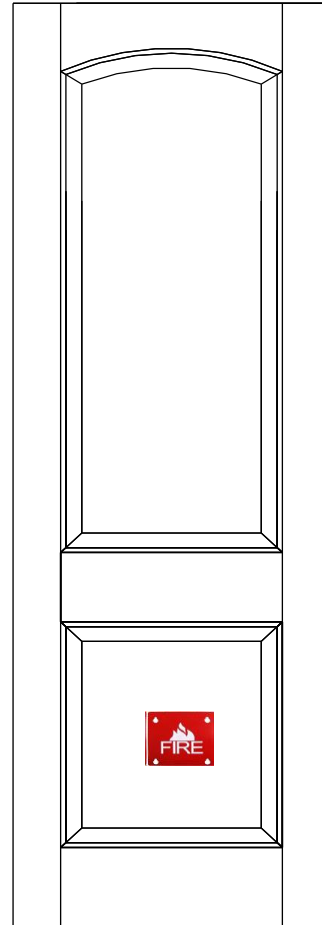

### SIZE SPECIFICATIONS


Standard Door	
Heights	
79"	6/7
95"	7/11

Can be Special Ordered for any size Width 2/0-4/0 or Height 6/5-8/0

Standard Door	
Thickness	Width
Only Available in 1 3/4	
1 3/4	2/0 - 4/0

Door Width	Stile Face Width
W	S
20" - 40"	4 1/2"
>= 42"	5"

Door Width	Arch Drop
W	AD
>= 24"	2 3/8"

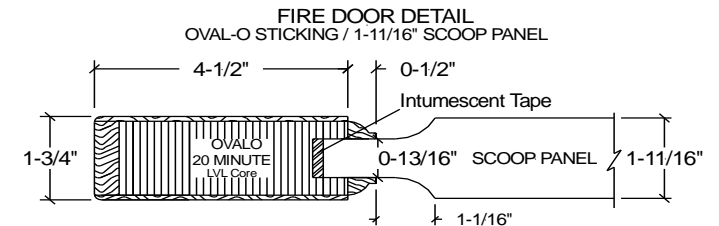

1 3/4" Cross Section - 1 11/16" Panel  
20 Minute Fire Rated

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel
TOP	Arch Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued, Intumescent Tape


Last Updated: 02/28/21






# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## EA9082V SCOOP RAISED PANEL SQUARE TOP : V-GROOVE 20 MINUTE FIRE RATED

20MIN Door shown separately as size ordered for stock doors



Note: All Stile and Rail Width Dimensions are face widths

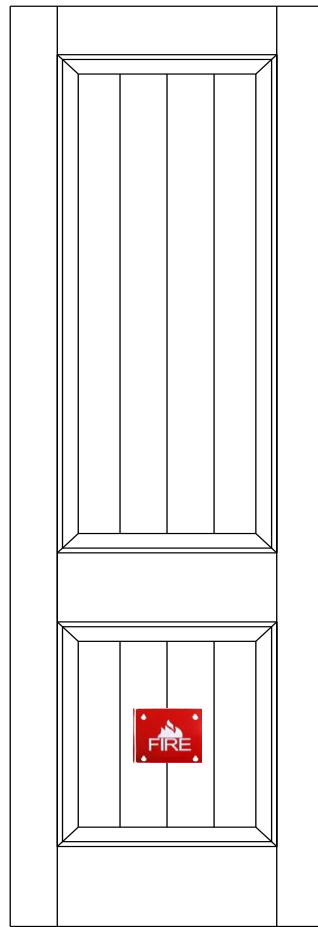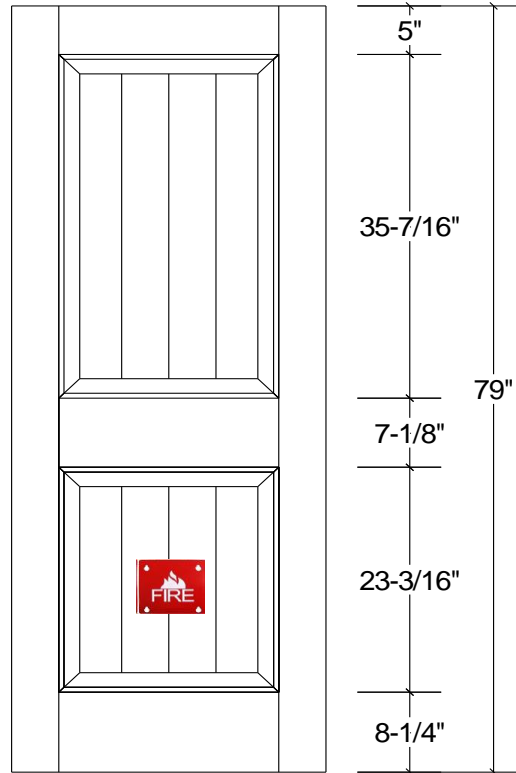


### SIZE SPECIFICATIONS

Standard Door		Standard Door	
Heights		Thickness	Width
79"	6/7	1 3/4	2/0 - 4/0
95"	7/11		

Can be Special Ordered for any size Width 2/0-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
20" - 40"	4 1/2"
>= 42"	5"

### FIRE DOOR DETAIL OVAL-O STICKING / 1-11/16" SCOOP PANEL

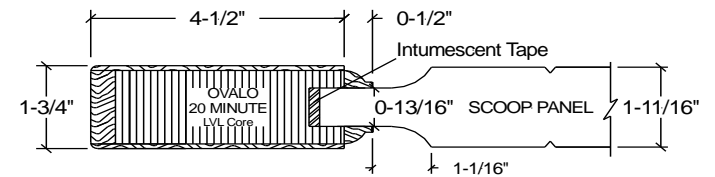

1 3/4" Cross Section - 1 11/16" Panel  
20 Minute Fire Rated

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating

### V-Grooves:

- 3/16" Wide x 1/8" Deep Grooves
- 4 1/2" between grooves.
- Outside staves may be less than 4 1/2"
- Grooves are NOT on glue lines.

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel : V-Groove
TOP	Square Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued, Intumescent Tape



Last Updated: 02/28/21



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## EA9083V SCOOP RAISED PANEL ARCH TOP : V-GROOVE 20 MINUTE FIRE RATED

20MIN Door shown separately as size ordered for stock doors

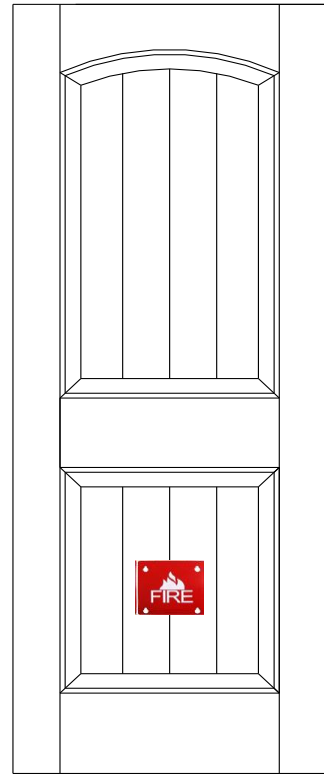

4-5/8"  
AD

33-7/16"



79"

7-1/8"

23-3/16"

8-1/4"

Note: All Stile  
and Rail  
Width  
Dimensions  
are face  
widths

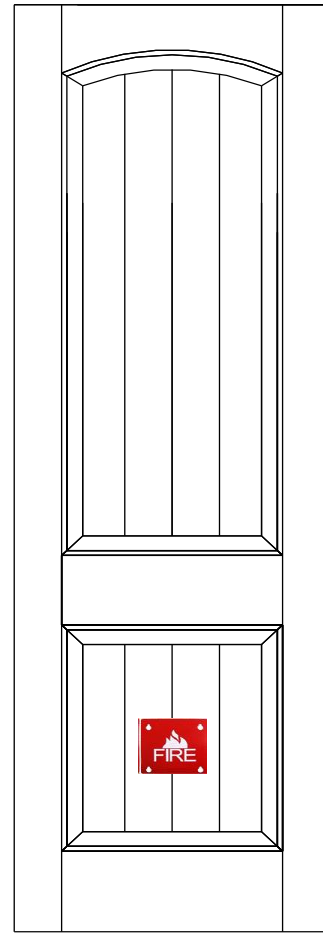

4-5/8"  
AD

49-7/16"

95"

7-1/8"

23-3/16"

8-1/4"

### SIZE SPECIFICATIONS

Standard Door	
Heights	
79"	6/7
95"	7/11


Can be Special Ordered for any size Width 2/0-4/0 or Height 6/5-8/0

Standard Door	
Thickness	Width
Only Available in 1 3/4	
1 3/4	2/0 - 4/0

Door	Stile Face
Width	Width
W	S
20" - 40"	4 1/2"
>= 42"	5"

Door	Arch
Width	Drop
W	AD
>= 24"	2 3/8"

### FIRE DOOR DETAIL OVAL-O STICKING / 1-11/16" SCOOP PANEL

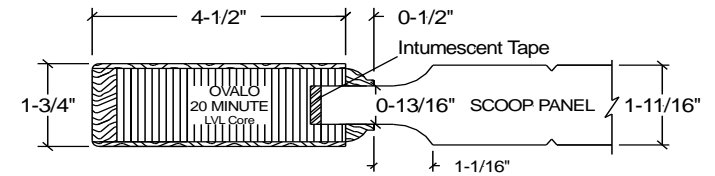

1 3/4" Cross Section - 1 11/16" Panel  
20 Minute Fire Rated

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating

### V-Grooves:

- 3/16" Wide x 1/8" Deep Grooves
- 4 1/2" between grooves.
- Outside staves may be less than 4 1/2"
- Grooves are NOT on glue lines

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	OvalO
PANEL DETAIL	Scoop Raised Panel : V-Groove
TOP	Arch Top
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Solid, Edge Glued, Intumescent Tape

Last Updated: 02/28/21

