
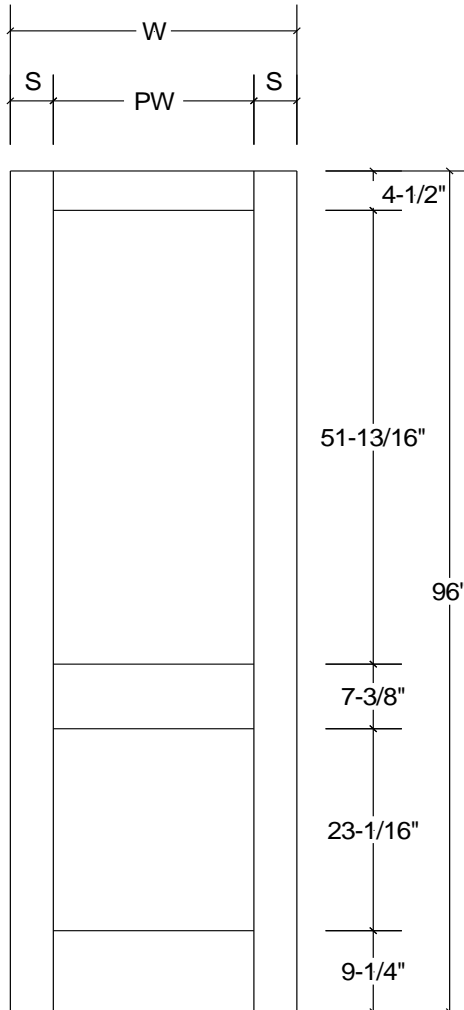


# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## OrePac Style 782 - 2 PANEL - SQUARE / FLAT

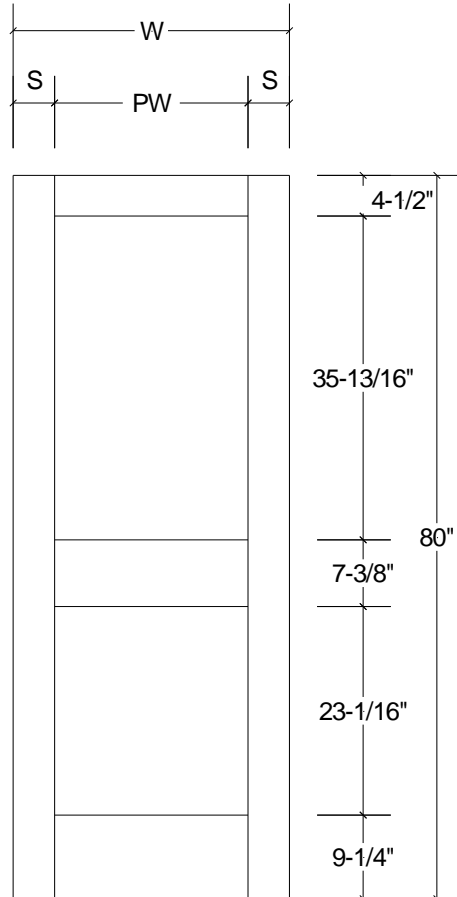


### SIZE SPECIFICATIONS

Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
96"	8/0	1 3/4	1/6 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
< 18"	4"
18" - 40"	4 1/2"
>= 42"	5"

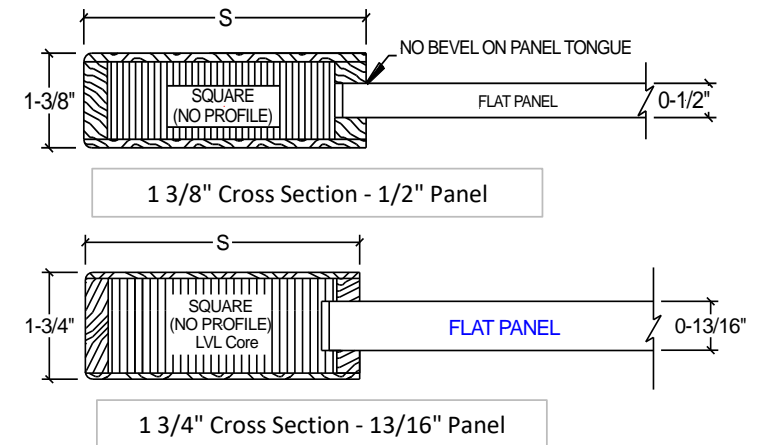

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	2P - Flat Panel
STYLE	Square, Shaker Style
STILES	Engineered, LVL or FJ Core
RAILS	Solid, Edge Glued
PANELS	Std: Solid, Edge Glued



Last Update: 02/28/21



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## OrePac Style 9782 - 2 PANEL - SQUARE / FLAT - 20 MIN RATED FIRE DOOR

20MIN Door shown separately as size ordered for stock doors

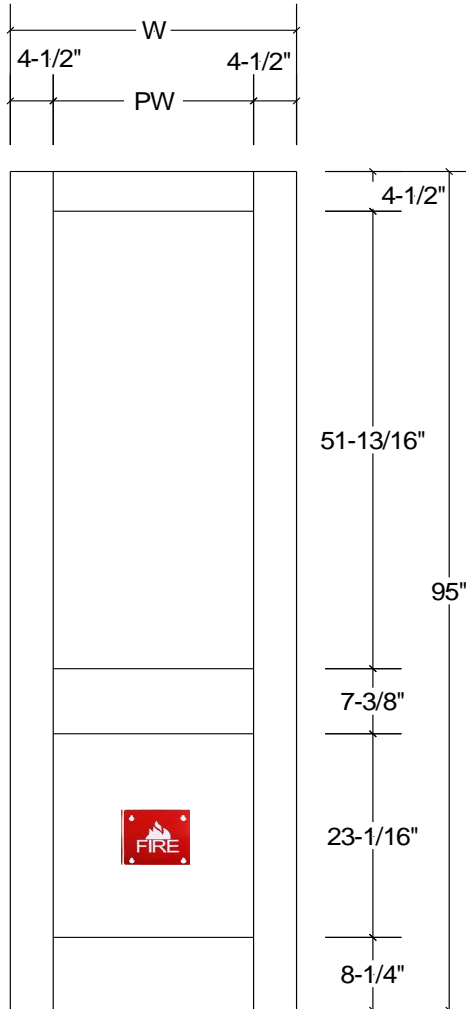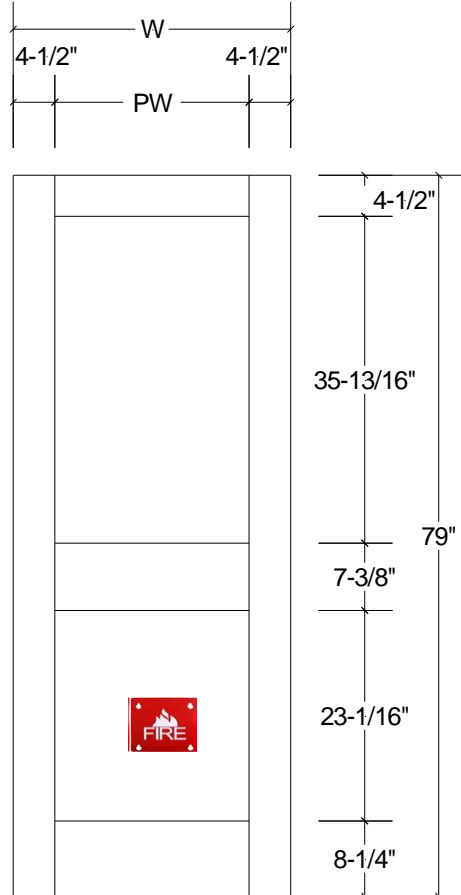


### SIZE SPECIFICATIONS

Standard Door		Standard Door	
Heights		Thickness	Width
79"	6/7		
95"	7/11	1 3/4	2/6 - 3/0

Can be Special Ordered for any size Width 2/0-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
All	4 1/2"

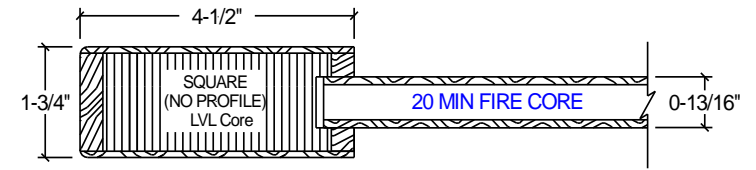

1 3/4" Cross Section - 13/16" Panel  
20 Minute Fire Rated

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating

### DOOR TYPE and MANUFACTURING SPECIFICATIONS


SPECIE	RUSTIC KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	2P - Flat Panel
STYLE	Square, Shaker Style, 20 Min Rated
STILES	Engineered, LVL or FJ Core
RAILS	Solid, Edge Glued
PANELS	Std: Engineered - MDF Fire Rated Core

Last Update: 02/28/21



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## OrePac Style 760 - 3 PANEL CRAFTSMAN - SQUARE/FLAT

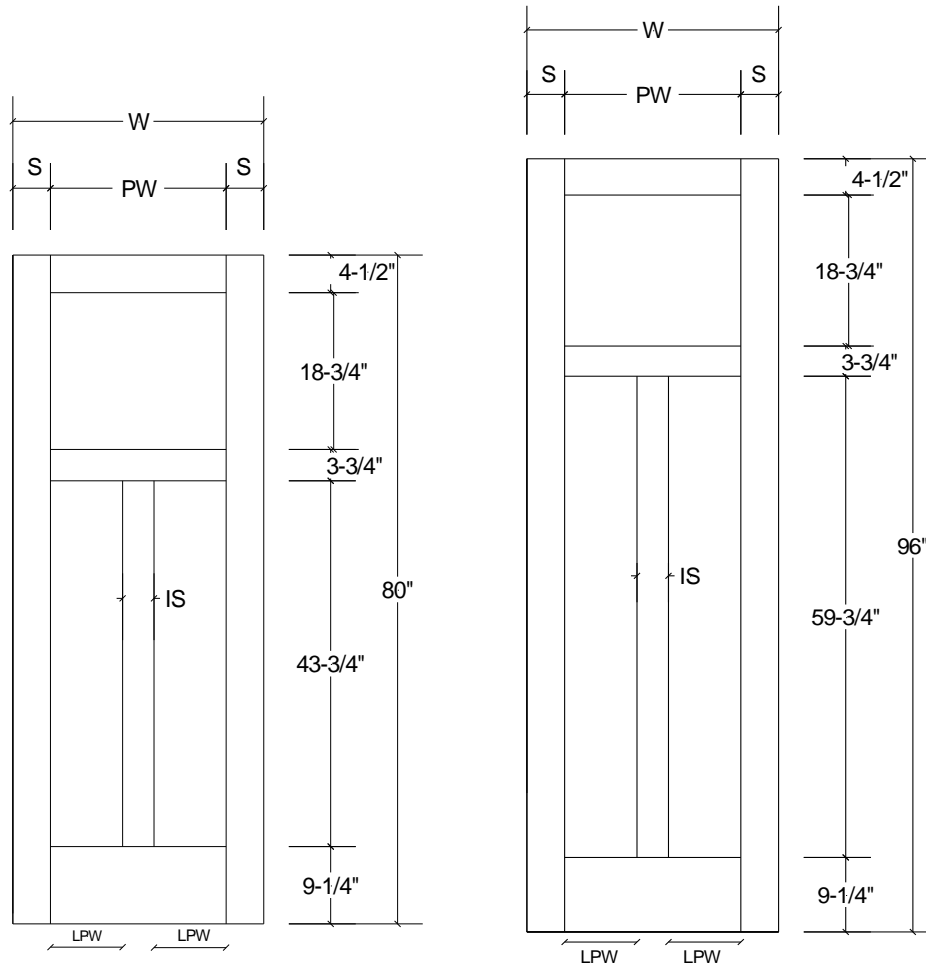


### SIZE SPECIFICATIONS


Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
96"	8/0	1 3/4	1/6 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0

Door	Stile Face	Door	InterStile
Width	Width	Width	Width
W	S	W	IS
< 18"	4"	<20"	None
18" - 36"	4 1/2"	=20"	2 1/2"
>= 42"	5"	>=22"	3 3/4"

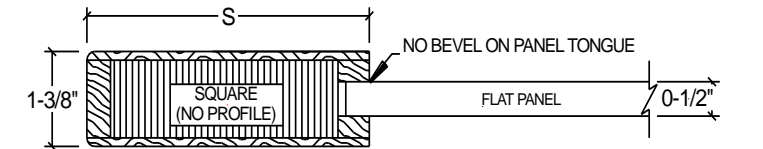

1 3/8" Cross Section - 1/2" Panel

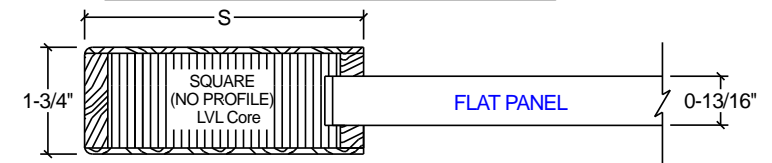

1 3/4" Cross Section - 13/16" Panel

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	1PU/2PL - Flat Panel
STYLE	Square, Craftsman Style
STILES	Engineered, LVL or FJ Core
RAILS	Solid, Edge Glued
PANELS	Std: Solid, Edge Glued



Last Update: 02/28/21



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## OrePac Style 9760 - 3 PANEL CRAFTSMAN - SQUARE/FLAT - 20 MIN RATED FIRE DOOR

20MIN Door shown separately as size ordered for stock doors

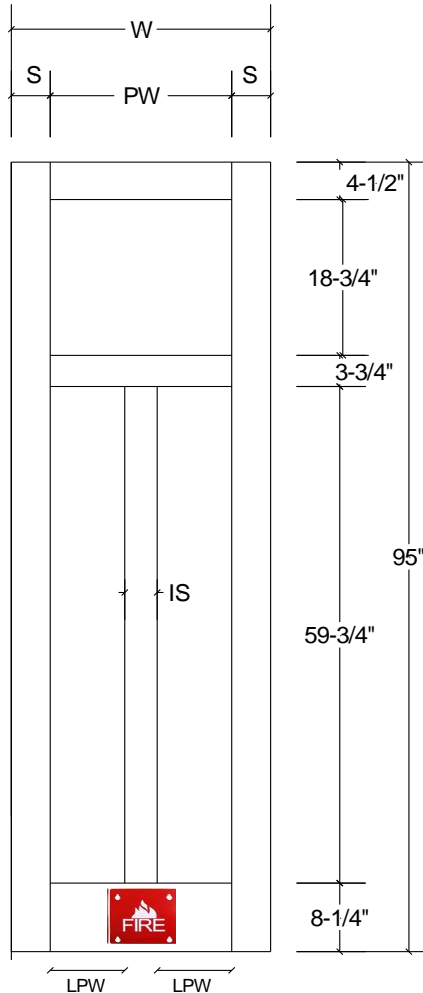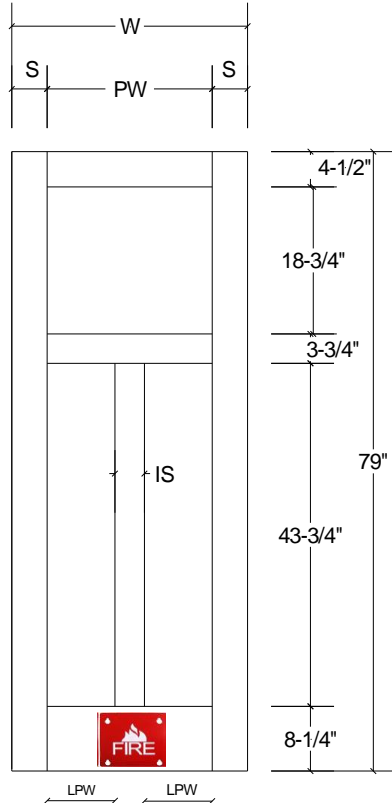

### SIZE SPECIFICATIONS


Standard Door	
Heights	
79"	6/7
95"	7/11

Standard Door	
Thickness	Width
1 3/4	2/6 - 3/0

Can be Special Ordered for any size Width 2/0-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
All	4 1/2"

Door	InterStile
Width	Width
W	IS
All	3 3/4

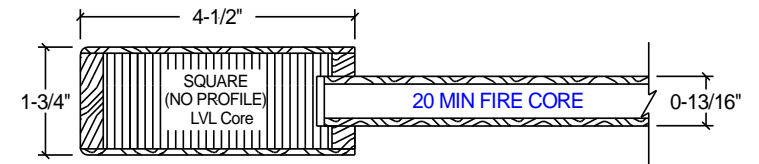

1 3/4" Cross Section - 13/16" Panel  
20 Minute Fire Rated

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating

### DOOR TYPE and MANUFACTURING SPECIFICATIONS


SPECIE	RUSTIC KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	1PU/2PL - Flat Panel
STYLE	Square, Craftsman Style, 20 Min Rated
STILES	Engineered, LVL or FJ Core
RAILS	Solid, Edge Glued
PANELS	Std: Engineered - MDF Fire Rated Core

Last Update: 02/28/21



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## OrePac 755 5/6 PANEL STACKED SQUARE/FLAT

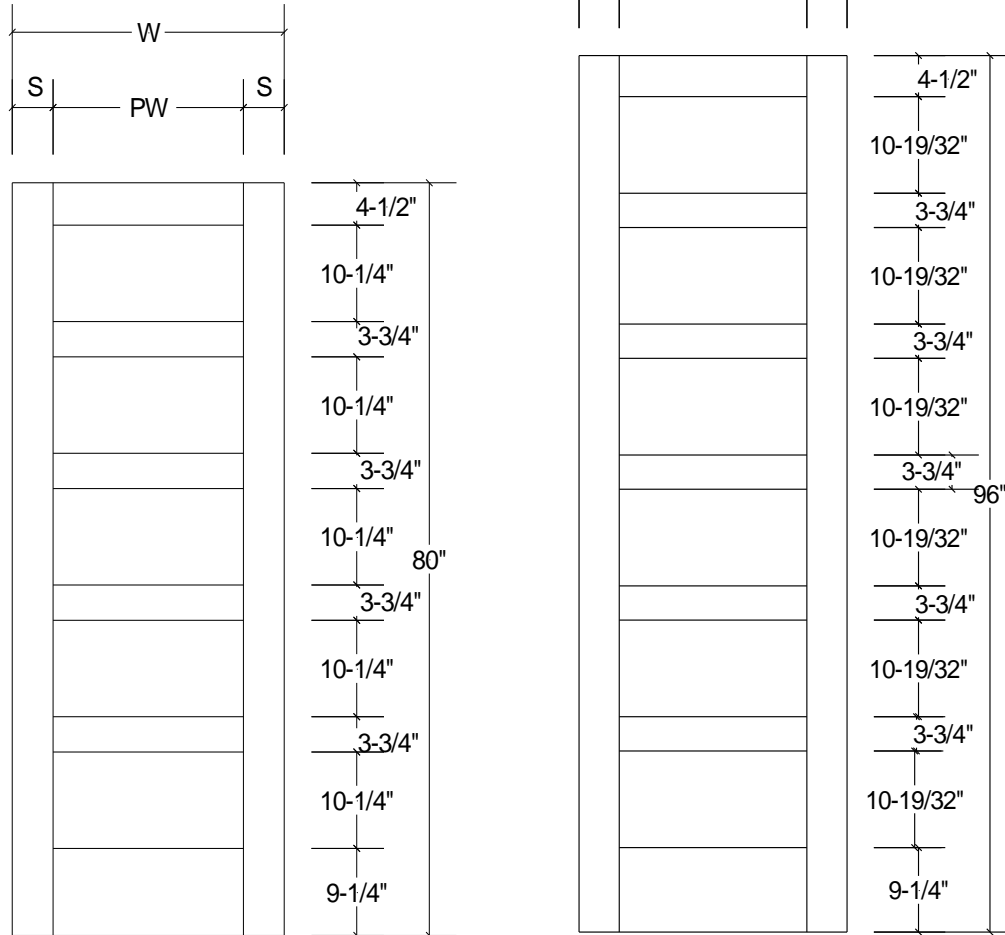


### SIZE SPECIFICATIONS


Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
84"	7/0	1 3/4	1/6 - 4/0
96"	8/0	20 MINUTE	2/6 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
< 18"	4"
18" - < 42"	4 1/2"
>= 42"	5"

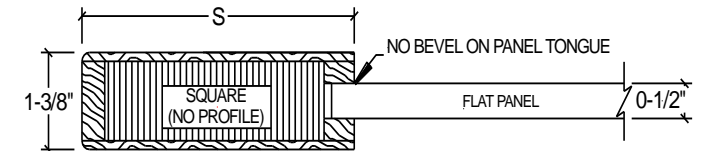

1 3/8" Cross Section - 1/2" Panel



1 3/4" Cross Section - 13/16" Panel

### DOOR TYPE and MANUFACTURING SPECIFICATIONS



SPECIE	KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	5P - Flat Panel < 7/11, 6 Panel if > =
STYLE	Square, Shaker Style
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Std: Solid, Edge Glued, Fire: Engineered



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## OrePac 9755 5/6 PANEL STACKED SQUARE/FLAT FIRE DOOR

20MIN Door shown separately as size ordered for stock doors

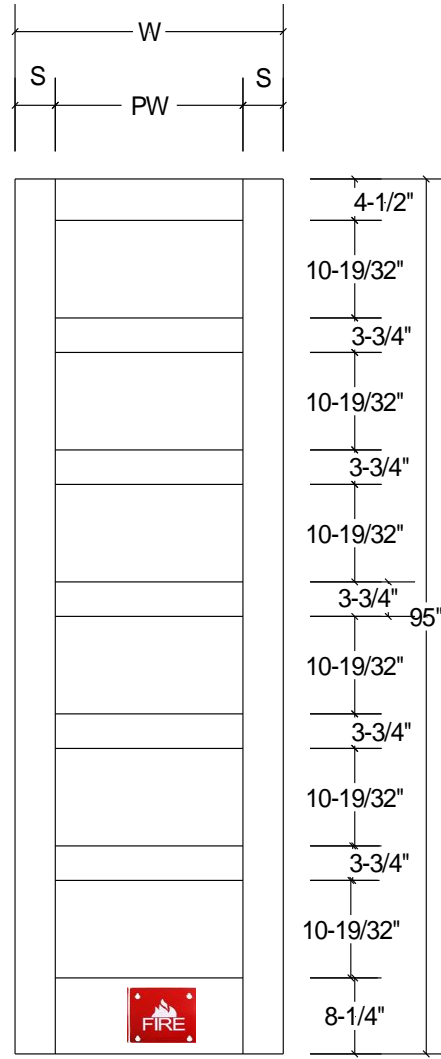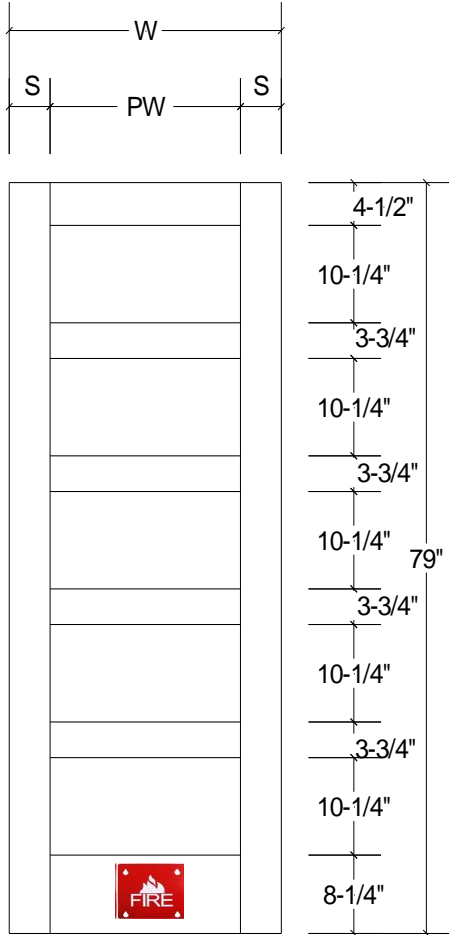


### SIZE SPECIFICATIONS

Standard Door		Standard Door	
Heights		Thickness	Width
79"	6/7		
95"	7/11	1 3/4	2/6 - 3/0

Can be Special Ordered for any size Width 2/0-4/0 or Height 6/5-8/0

Door	Stile Face
Width	Width
W	S
30" - 36"	4 1/2"

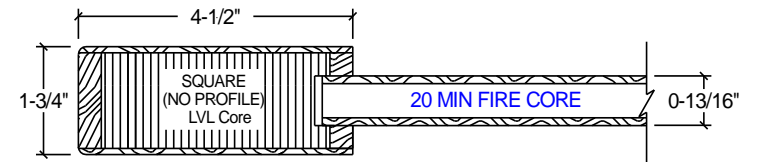

1 3/4" Cross Section - 13/16" Panel  
20 Minute Fire Rated

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating


### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	5P - Flat Panel < 7/11, 6 Panel if > =
STYLE	Square, Shaker Style
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Std: Solid, Edge Glued, Fire: Engineered



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## 3 PANEL STACKED SQUARE/FLAT

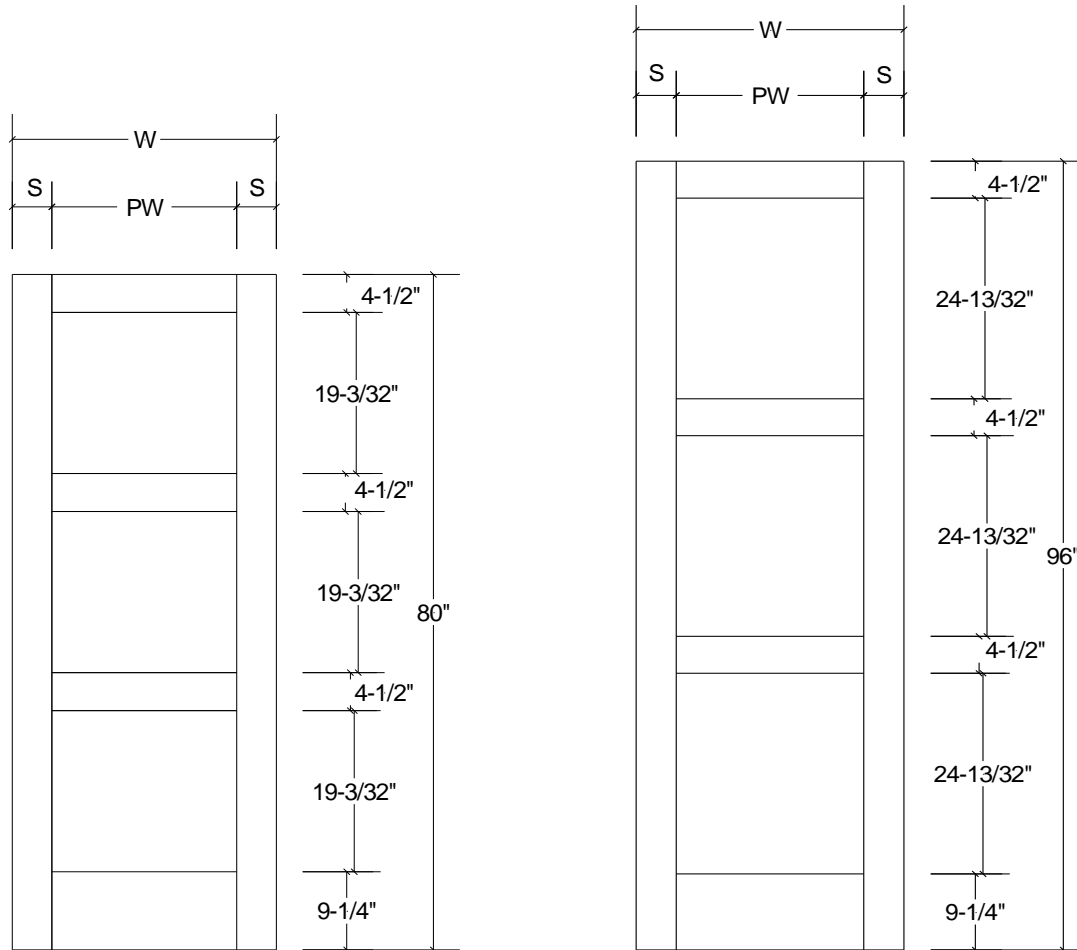


### SIZE SPECIFICATIONS


Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
84"	7/0	1 3/4	1/6 - 4/0
96"	8/0	20 MINUTE	2/0 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0


Door	Stile Face
Width	Width
W	S
< 18"	4"
18" - 36"	4 1/2"
>= 42"	5"



1 3/8" Cross Section - 1/2" Panel

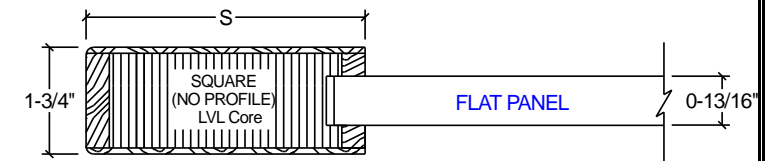

1 3/4" Cross Section - 13/16" Panel

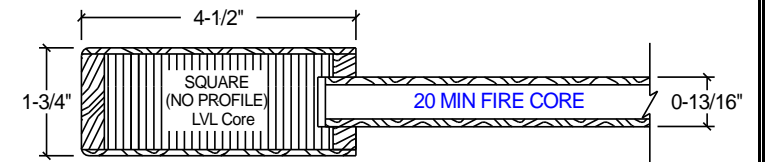

1 3/4" Cross Section - 13/16" Panel  
20 Minute Fire Rated

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	3P - Flat Panel
STYLE	Square, Shaker Style
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Std: Solid, Edge Glued, Fire: Engineered



### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating



# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## 4 PANEL STACKED SQUARE/FLAT

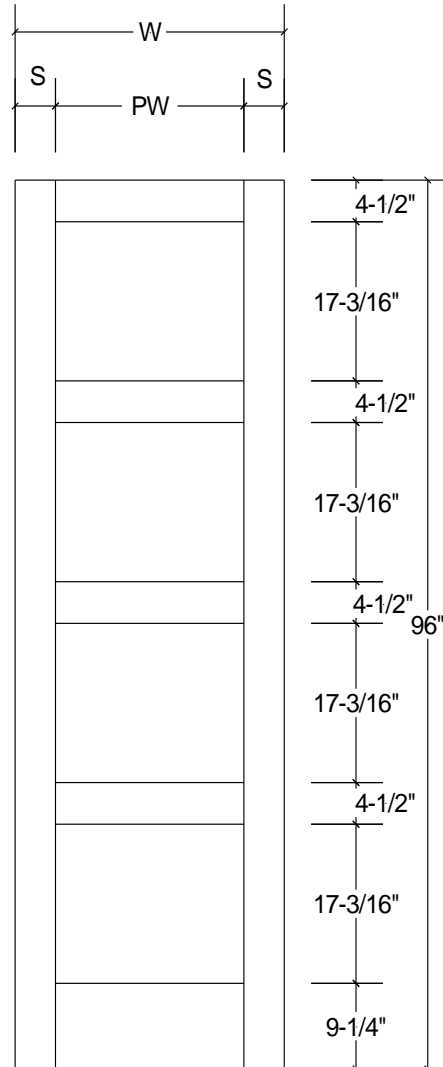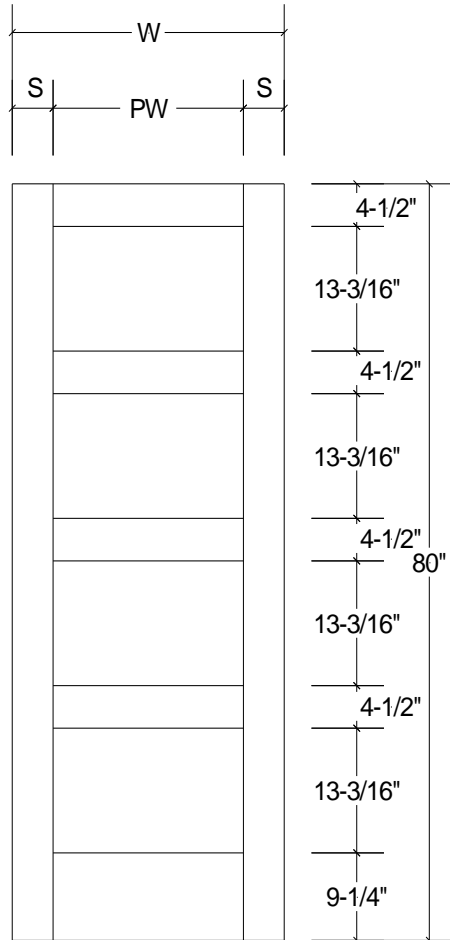


## SIZE SPECIFICATIONS


Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
84"	7/0	1 3/4	1/6 - 4/0
96"	8/0	20 MINUTE	2/6 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0


Door	Stile Face
Width	Width
W	S
< 18"	4"
18" - 36"	4 1/2"
>= 42"	5"

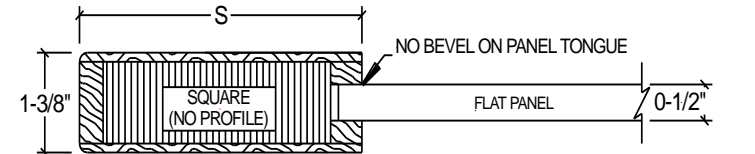

1 3/8" Cross Section - 1/2" Panel

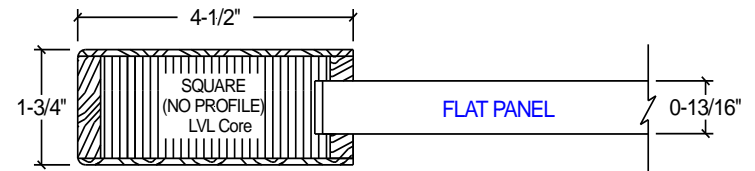

1 3/4" Cross Section - 13/16" Panel

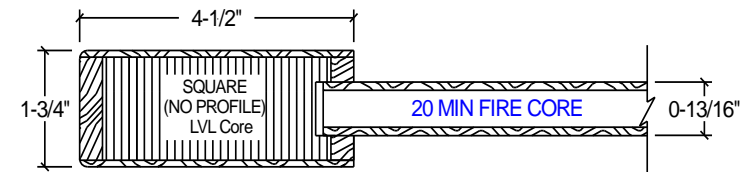

1 3/4" Cross Section - 13/16" Panel  
20 Minute Fire Rated

## DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	4P - Flat Panel
STYLE	Square, Shaker Style
STILES	Engineered, LVL Core
RAILS	Solid, Edge Glued
PANELS	Std: Solid, Edge Glued, Fire: Engineered

## 20 MINUTE FIRE RATED DOORS:



- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating





# PACIFIC PINE PRODUCTS DOORS PROVIDED TO OREPAC

## OrePac Style 720 - 1 PANEL - SQUARE / FLAT

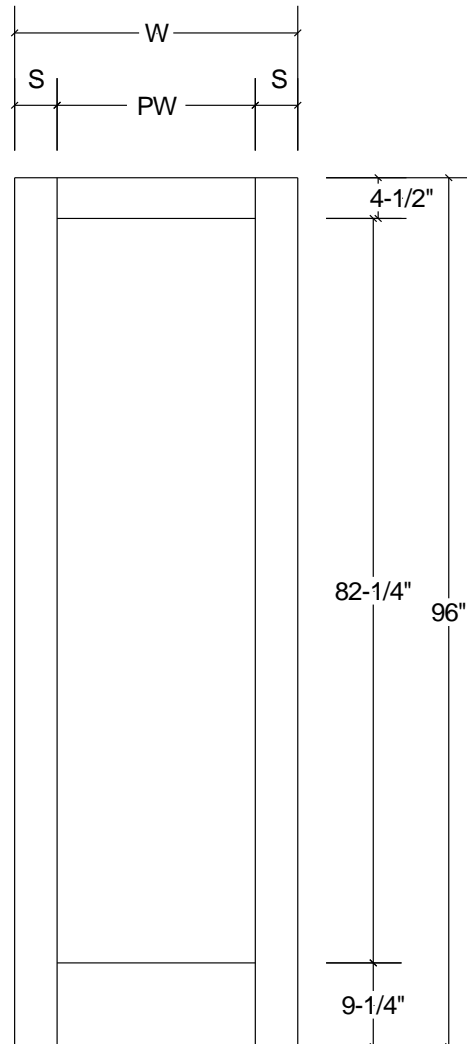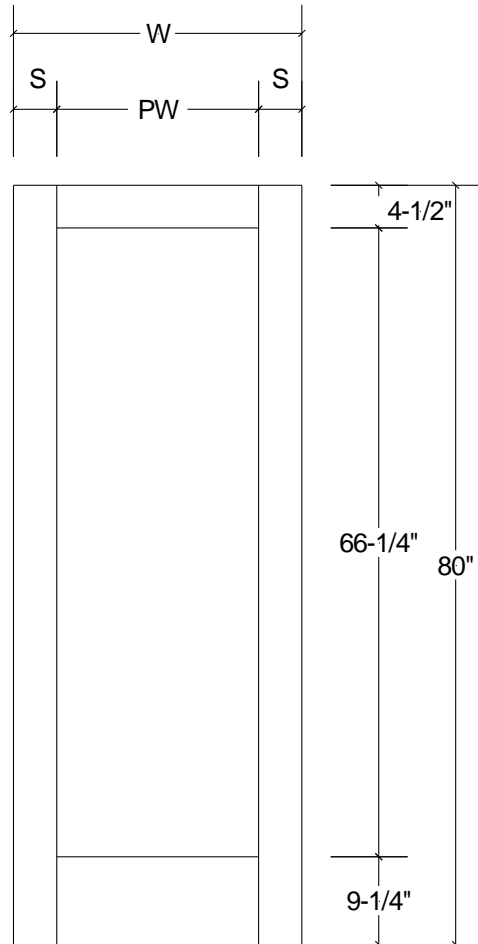


### SIZE SPECIFICATIONS


Standard Door		Standard Door	
Heights		Thickness	Width
80"	6/8	1 3/8	1/6 - 3/0
84"	7/0	1 3/4	1/6 - 4/0
96"	8/0	20 MINUTE	2/0 - 4/0

Can be Special Ordered for any size Width 1/6-4/0 or Height 6/5-8/0


Door	Stile Face
Width	Width
W	S
< 18"	4"
18" - 36"	4 1/2"
>= 42"	5"

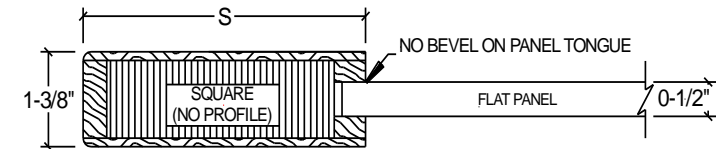

1 3/8" Cross Section - 1/2" Panel

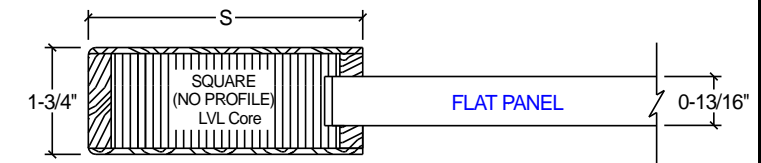

1 3/4" Cross Section - 13/16" Panel

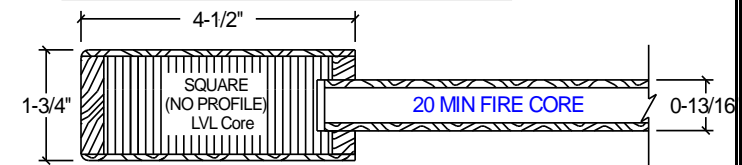

1 3/4" Cross Section - 13/16" Panel  
20 Minute Fire Rated

### DOOR TYPE and MANUFACTURING SPECIFICATIONS

SPECIE	RUSTIC KNOTTY ALDER
STICKING	Square (No Profile)
PANEL DETAIL	1P - Flat Panel
STYLE	Square, Shaker Style
STILES	Engineered, LVL or FJ Core
RAILS	Solid, Edge Glued
PANELS	Std: Solid, Edge Glued, Fire: Engineered

### 20 MINUTE FIRE RATED DOORS:

- Certified by InterTek
- OrePac approved to Machine Doors and maintain Fire Rating

