main - top red dot = pin 1, [H] = hand-fitted, dashed = large part (fit last)

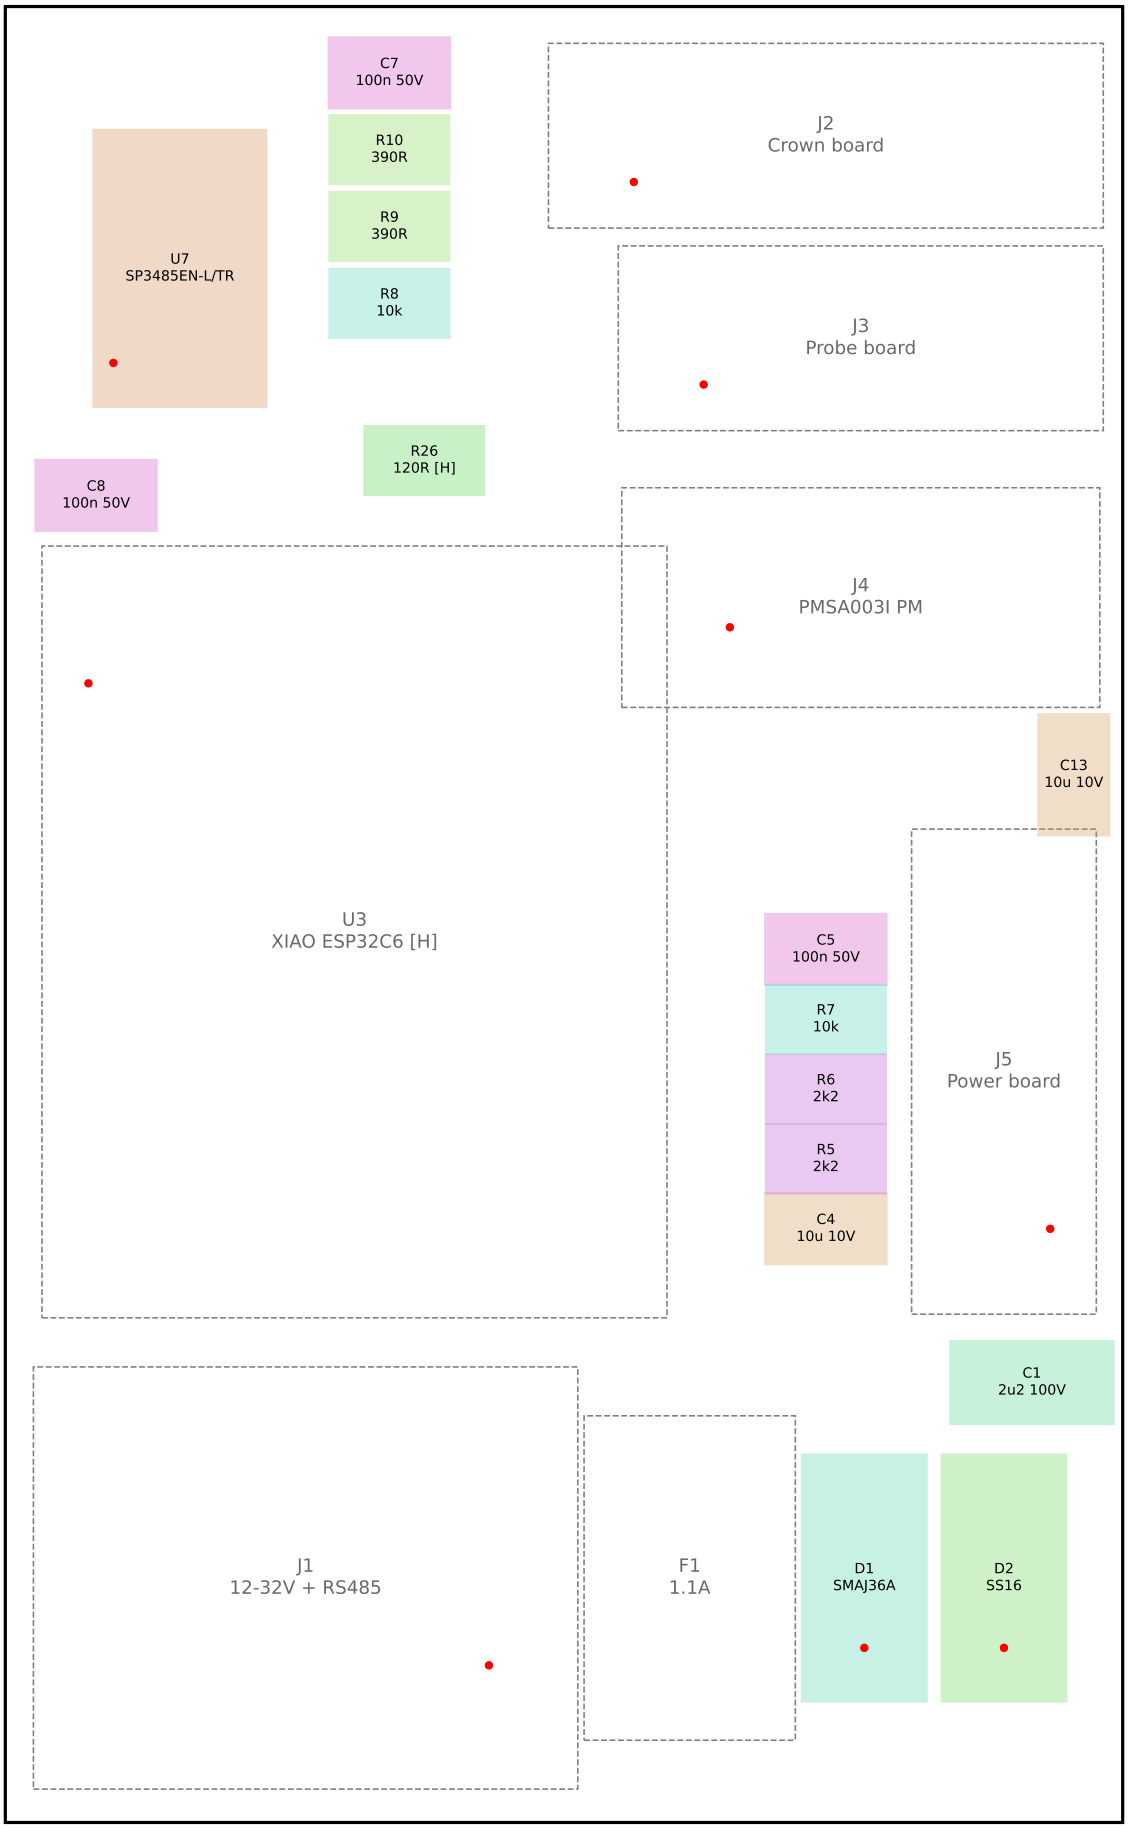

main - bottom (seen from below, mirrored) red dot = pin 1, [H] = hand-fitted, dashed = large part (fit last)

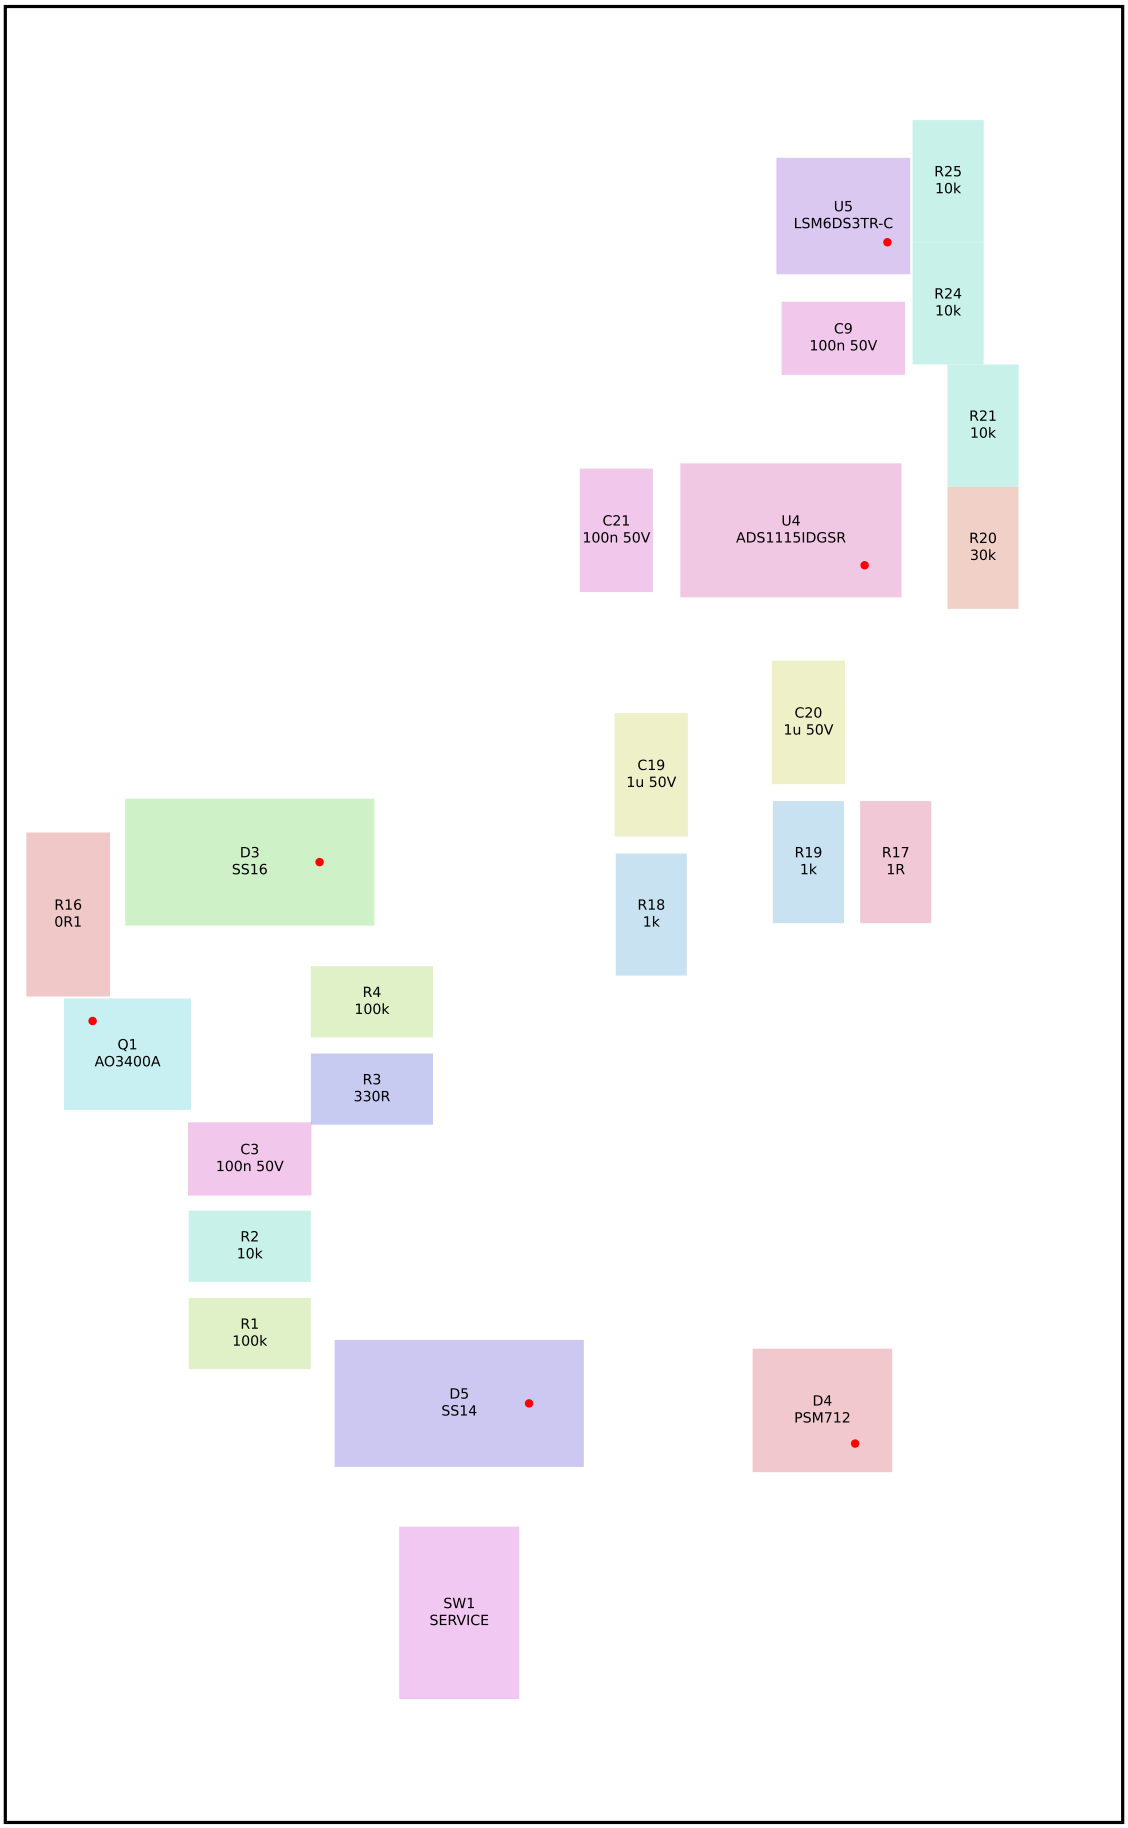

main - values (quantity, side, references)

- 0R1 x1 bottom: R16
- 1.1A x1 top: F1
- 100k x2 bottom: R1, R4
- 100n 50V x3 top: C5, C7, C8
- 100n 50V x3 bottom: C3, C9, C21
- 10k x2 top: R7, R8
- 10k x4 bottom: R2, R21, R24, R25
- 10u 10V x2 top: C4, C13
- 12-32V + RS485 x1 top: J1
- 120R x1 top: R26
- 1R x1 bottom: R17
- 1k x2 bottom: R18, R19
- 1u 50V x2 bottom: C19, C20
- 2k2 x2 top: R5, R6
- 2u2 100V x1 top: C1
- 30k x1 bottom: R20
- 330R x1 bottom: R3
- 390R x2 top: R9, R10
- ADS1115IDGSR x1 bottom: U4
- AO3400A x1 bottom: Q1
- Crown board x1 top: J2
- LSM6DS3TR-C x1 bottom: U5
- PMSA003I PM x1 top: J4
- PSM712 x1 bottom: D4
- Power board x1 top: J5
- Probe board x1 top: J3
- SERVICE x1 bottom: SW1
- SMAJ36A x1 top: D1
- SP3485EN-L/TR x1 top: U7
- SS14 x1 bottom: D5
- SS16 x1 top: D2
- SS16 x1 bottom: D3
- XIAO ESP32C6 x1 top: U3