Exp No: 1	Study of various Network commands used in Linux and Windows

AIM:

To study and practise the various network commands used in Linux and Windows operating systems.

ALGORITHM / PROCEDURE:

1. Open the Terminal in Linux and the Command Prompt (`cmd`) in Windows.
2. Use `hostname` to see the name of the computer.
3. Use `ifconfig` (Linux) and `ipconfig` (Windows) to see the IP address, subnet mask and MAC address.
4. Use `ping` to check whether the remote system is reachable. Note the packet loss and the time taken.
5. Use `traceroute` (Linux) and `tracert` (Windows) to see the path taken by the packets.
6. Use `nslookup` and `dig` to find the IP address of a domain name.
7. Use `netstat` to see the active connections and open ports.
8. Use `arp -a` to see the IP address to MAC address table.
9. Use `route` (Linux) and `route print` (Windows) to see the routing table.
10. Note down the output of each command.

Commands used:

Purpose	Linux	Windows
Host name	`hostname`	`hostname`
IP configuration	`ifconfig / ip addr`	`ipconfig /all`
Check connectivity	`ping -c 4 google.com`	`ping google.com`

Trace the route	`traceroute google.com`	`tracert google.com`
DNS lookup	`nslookup / dig`	`nslookup`
MAC address	`ip link`	`getmac`
Active connections	`netstat -tuln`	`netstat -an`
ARP table	`arp -a`	`arp -a`
Routing table	`route -n`	`route print`

DIAGRAM:

Fig 1: Network commands and the layers they work in


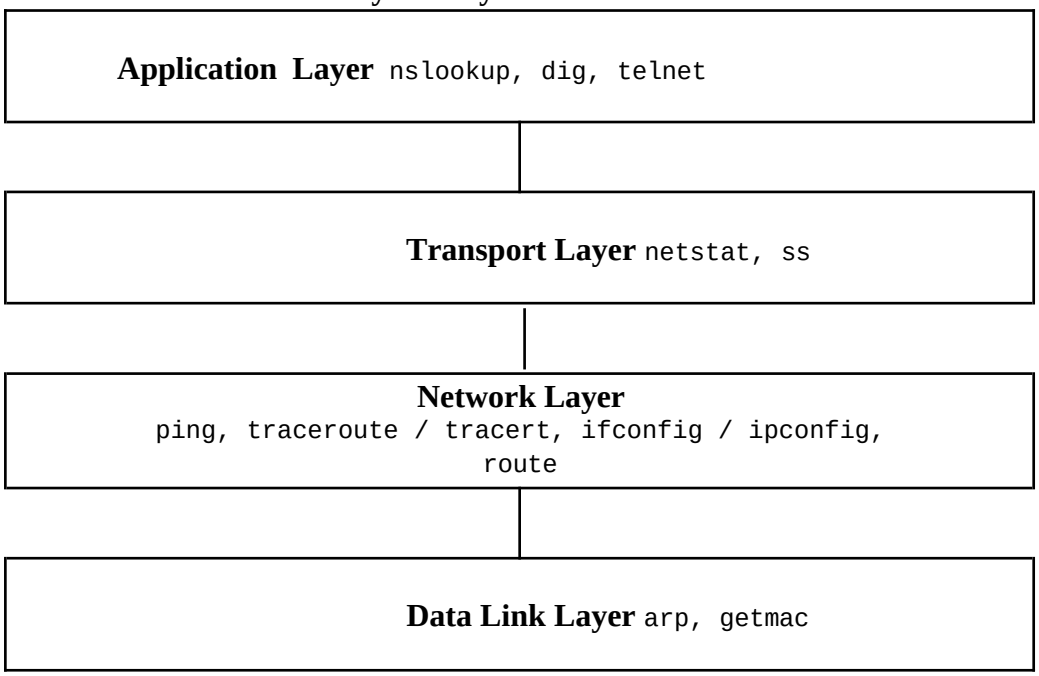


Fig 2: Working of ping command

OUTPUT:

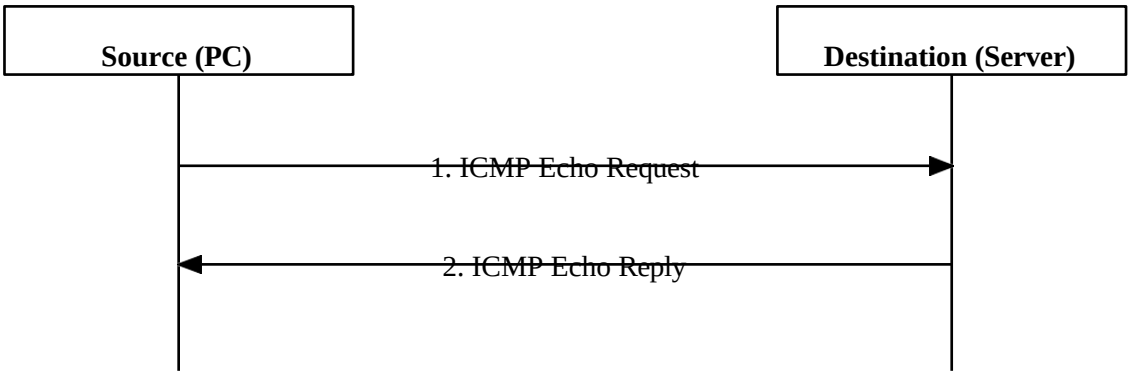


```
                    VirtualBox:         ~
userUSER          @userUSER -
userUSER@userUSER-VirtualBox:~$ ifconfig
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500        inet
192.168.1.10  netmask 255.255.255.0  broadcast
192.168.1.255            inet6  fe80::a00:27ff:fe4e:66a1  prefixlen  64
scopeid 0x20<link>           ether  08:00:27:4e:66:a1  txqueuelen  1000
(Ethernet)         RX packets 2543  bytes 2154321 (2.1 MB)         TX
packets 1987  bytes 312456 (312.4 KB) lo: flags=73<UP,LOOPBACK,RUNNING>
mtu 65536         inet 127.0.0.1  netmask 255.0.0.0
```

Linux:

```
userUSER @userUSER -VirtualBox: ~
userUSER @userUSER -VirtualBox:~$
hostname userUSER        -VirtualBox
userUSER @userUSER -VirtualBox: ~
userUSER @userUSER -VirtualBox:~$ ping -c 4 google.com PING
google.com (142.250.195.78) 56(84) bytes of data.
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=1 ttl=117 time=14.2 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=2 ttl=117 time=14.8 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=3 ttl=117 time=13.9 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=4 ttl=117 time=15.2 ms
--- google.com ping statistics --4 packets transmitted, 4 received,
0% packet loss, time 3005ms rtt min/avg/max/mdev =
13.904/14.525/15.230/0.512 ms
```

```
                    VirtualBox:         ~
userUSER          @userUSER -
userUSER@userUSER-VirtualBox:~$ arp -a
_gateway (192.168.1.1) at c4:e9:84:2a:5b:10 [ether] on enp0s3
? (192.168.1.12) at 3c:52:82:7d:11:9e [ether] on enp0s3
```

```
                    VirtualBox:        ~
userUSER          @userUSER -

userUSER@userUSER-VirtualBox:~$ route -n
Kernel IP routing table
Destination     Gateway         Genmask         Flags Metric Ref    Use Iface
0.0.0.0         192.168.1.1     0.0.0.0         UG    100    0        0 enp0s3
192.168.1.0     0.0.0.0         255.255.255.0   U     100    0        0 enp0s3
```

```
                    VirtualBox:        ~
userUSER          @userUSER -

userUSER @userUSER -VirtualBox:~$ traceroute google.com traceroute to google.com (142.250.195.78), 30
hops max, 60 byte packets  1
_gateway (192.168.1.1)  1.102 ms  1.045 ms  0.987 ms
2  10.20.0.1 (10.20.0.1)  4.321 ms  4.287 ms  4.410 ms
3  172.16.5.9 (172.16.5.9)  8.765 ms  8.801 ms  8.730 ms
4  72.14.215.85 (72.14.215.85)  12.543 ms  12.498 ms  12.610 ms
5  maa03s45-in-f14.1e100.net (142.250.195.78)  14.230 ms  14.187 ms  14.301 ms
```

```
                    VirtualBox:        ~
userUSER          @userUSER -

userUSER@userUSER -VirtualBox:~$ nslookup google.com
Server:         192.168.1.1 Address:        192.168.1.1#53

Non-authoritative answer:
Name:   google.com
Address: 142.250.195.78
```

```
                    VirtualBox:        ~
userUSER          @userUSER -

userUSER@userUSER -VirtualBox:~$ dig google.com +short 142.250.195.78
```

```
                    VirtualBox:        ~
userUSER          @userUSER -

userUSER @userUSER -VirtualBox:~$ netstat -tuln Active Internet connections
(only servers) Proto Recv-Q Send-Q Local Address           Foreign
Address         State tcp        0      0 0.0.0.0:22
0.0.0.0:*               LISTEN tcp        0      0 127.0.0.1:631           0.0.0.0:*
LISTEN tcp6       0      0 :::80                   :::*                    LISTEN udp        0
0 0.0.0.0:68
0.0.0.0:*
```

Command Prompt

```
C:\Users\userUSER >nslookup google.com Server:
dns.google Address:
8.8.8.8

Non-authoritative answer:
Name:    google.com
Address:  142.250.195.78
```

Windows:

Command Prompt

```
C:\Users\userUSER >hostname
DESKTOP-userUSER
```

Command Prompt

```
C:\Users\userUSER >ipconfig /all

Windows IP Configuration
   Host Name . . . . . . . . . . . . : DESKTOP-userUSER    Primary Dns
Suffix  . . . . . . . :
   Node Type . . . . . . . . . . . . : Hybrid
IP Routing Enabled. . . . . . . . : No Ethernet
adapter Ethernet:
   Physical Address. . . . . . . . . : 00-1A-2B-3C-4D-5E
   DHCP Enabled. . . . . . . . . . . : Yes
   IPv4 Address. . . . . . . . . . . : 192.168.1.25(Preferred)
   Subnet Mask . . . . . . . . . . . : 255.255.255.0
   Default Gateway . . . . . . . . . : 192.168.1.1
   DHCP Server . . . . . . . . . . . : 192.168.1.1
   DNS Servers . . . . . . . . . . . : 8.8.8.8
```

Command Prompt

```
C:\Users\userUSER >ping google.com Pinging google.com
[142.250.195.78] with 32 bytes of data: Reply from
142.250.195.78: bytes=32 time=15ms TTL=117 Reply from
142.250.195.78: bytes=32 time=14ms TTL=117 Reply from
142.250.195.78: bytes=32 time=14ms TTL=117 Reply from
142.250.195.78: bytes=32 time=16ms TTL=117 Ping statistics
for 142.250.195.78:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate
round trip times in milli-seconds:
    Minimum = 14ms, Maximum = 16ms, Average = 14ms
```

Command Prompt

```
C:\Users\userUSER >tracert google.com

Tracing route to google.com [142.250.195.78] over a maximum of 30 hops:

1      <1 ms    <1 ms    <1 ms  192.168.1.1
2      4 ms     4 ms     4 ms  10.20.0.1
3      9 ms     8 ms     9 ms  172.16.5.9
4      13 ms    12 ms    12 ms  72.14.215.85  5    14 ms    14 ms    15 ms  142.250.195.78 Trace
complete.
```

Command Prompt

```
C:\Users\userUSER >netstat -an

Active Connections

  Proto  Local Address          Foreign Address        State
  TCP    0.0.0.0:135            0.0.0.0:0              LISTENING
  TCP    0.0.0.0:445            0.0.0.0:0              LISTENING
  TCP    192.168.1.25:50234     142.250.195.78:443     ESTABLISHED
UDP    0.0.0.0:5353           *:*
```

Command Prompt

```
C:\Users\userUSER >arp -a

Interface: 192.168.1.25 --- 0x8
  Internet Address      Physical Address      Type
  192.168.1.1           c4-e9-84-2a-5b-10     dynamic
  192.168.1.255         ff-ff-ff-ff-ff-ff     static
```

Command Prompt

```
C:\Users\userUSER >route print

IPv4 Route Table
=========================================================================== Active Routes:
Network Destination        Netmask          Gateway       Interface  Metric           0.0.0.0
0.0.0.0      192.168.1.1    192.168.1.25     25
        127.0.0.0        255.0.0.0         On-link         127.0.0.1    331
      192.168.1.0    255.255.255.0         On-link      192.168.1.25    281
```

Command Prompt

```
C:\Users\userUSER >getmac

Physical Address    Transport Name
==================  ============================================================  00-1A-2B-3C-4D-5E
\Device\Tcpip_{8F3A21B0-5C6D-4E7F-9A1B-2C3D4E5F6A7B}
```

RESULT:

Thus the various network commands used in Linux and Windows were studied and executed successfully.